



18-Cell Battery Pack Emulator for BMx7318 BCC EVBs

BATT-7318EMU NEW

Active

Last Updated: May 28, 2026


The BATT-7318EMU board emulates a multi-cell battery pack, multiple cell temperatures and cell discharge/charge currents. The emulation board can easily connect to for the BMA7318 18-cell battery cell controller (BCC):

- EVBMA7318-SPI: distributed board with a single MBMA7318FAIAE, supporting serial peripheral interface (SPI) communication
- EVBMA7318-TPL: distributed board with a single MBMA7318TAIAE, supporting Transport Protocol Link communication

Users can connect the BATT-7318EMU board for quick evaluation of NXP battery cell controllers (BCCs) integrated circuits (ICs) or to assist in software development. This board provide an intuitive way to:

- Change the voltage across any of the 18 cells of an emulated battery pack
- Adjust analog input voltages to emulate battery pack temperature
- Modify the voltage across the battery pack current sensor

BATT-7318EMU Block Diagram

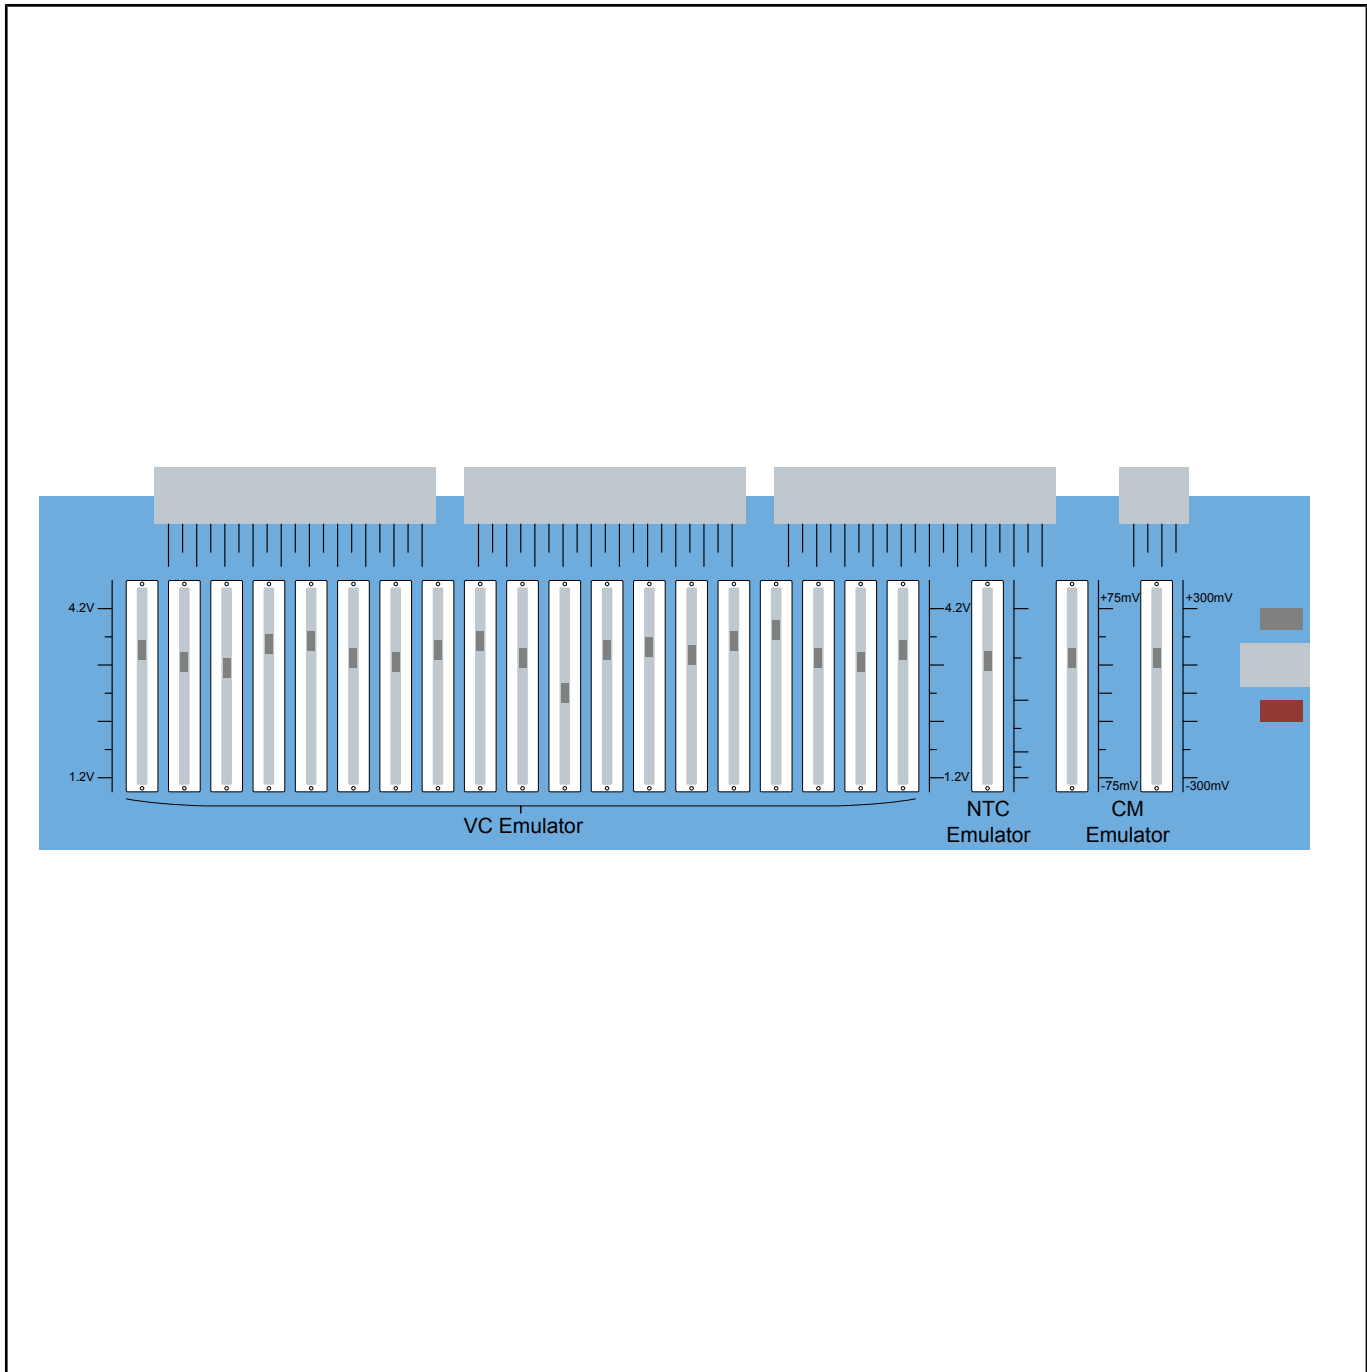

View additional information for [18-Cell Battery Pack Emulator for BMx7318 BCC EVBs](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2026 NXP B.V.