

PTN3222HM

1-Port eUSB2 to USB2 Redriver

Rev. 1.0 — 16 October 2025

Product data sheet



Document information

Information	Content
Keywords	PTN3222HM, I ² C, eUSB2, USB2, Host role, Device role, Equalization
Abstract	PTN3222HM is a 1-port eUSB2 to USB2 redriver IC that performs translation between eUSB2 and USB2 signaling schemes.



1 General description

PTN3222HM is a 1-port eUSB2 to USB2 redriver IC that performs translation between eUSB2 and USB2 signaling schemes. It is meant to be used in systems that have eUSB2 interface on one side and USB2 interface on the other side. It supports host repeater, device repeater, or dual role repeater function.

PTN3222HM implements Repeater mode (eUSB2 to USB2 redriver) and it supports link power management features. PTN3222HM is targeted to be USB2 compliant and eUSB2 conformant. It supports all three speeds/data rates: Low Speed (1.5 Mbit/s), Full Speed (12 Mbit/s), and High Speed (480 Mbit/s).

PTN3222HM provides a target I²C register interface to initialize the required functionality and features as per the platform application need. The I²C target address is selectable using a quaternary input pin (that selects one of the four addresses).

It is powered by two power supplies (VDD3V3, VDD1V8) and is available in a QFN12 package (1.75 mm x 2.2 mm and 0.4 mm pitch).

2 Features and benefits

- 1-port eUSB2 to USB2 redriver functionality
- Conforms to USB2 specification along with relevant ECNs
- Conforms to eUSB2 specification v1.1
- Supports Auto Resume with infinite timeout
- Supports host only repeater, device only repeater, and dual-mode repeater role
- Supports all USB2.0 data rates
 - Low-speed operation (1.5 Mbit/s)
 - Full speed operation (12 Mbit/s)
 - High-speed operation (480 Mbit/s)
- Supports RAP accesses for a select set of register accesses
- Integrated and selectable pullup and pulldown resistors on both eUSB2 and USB2 ends
- Signal Integrity (SI) configurability
 - eUSB2 – TX de-emphasis, RX equalization, RX squelch threshold, TX output swing
 - USB2 – HS disconnect detection threshold, RX squelch threshold, RX termination, RX equalization, TX de-emphasis, TX slew rate, TX output swing
- Supports BC1.2 power provider CDP configuration capability in host mode
- Low current consumption
 - Supports eUSB2 and USB2 power management
 - Implements Deep Standby mode for lowest power consumption
- Robustness features
 - USB2 data pins tolerate 5.5 V (DC) for 24 hours
 - USB2 data pins withstand short to GND for 24 hours
 - USB2 data pins withstand collision on DP/DN pins due to faulty USB devices
- GPIOs and high-speed data pins are backpower safe
- The I²C target interface supports Standard mode, Fast-mode Plus, and Fast mode
- Power supplies - VDD3V3, VDD1V8
- ESD HBM 2 kV CDM 500 V
- Operating ambient temperature range -40 °C to +85 °C
- Available in QFN12 package

3 Applications

- eUSB2 to USB2 repeater function in platforms (for example, hosts, devices, hubs, routers, protocol bridges, and so on) with Standard A/Standard B/micro-B/ USB-Type C connector scenarios
 - Host only repeater
 - Device only repeater
 - Dual role repeater (as determined dynamically in the application)

4 Ordering information

[Table 1](#) describes the ordering information for PTN3222HM.

Table 1. Ordering information

Type number	Package		
	Name	Description	Version
PTN3222HM	XQFN12	Plastic, thermal enhanced thin quad flat package; no leads; 12 terminals; 1.75 mm x 2.2 mm; 0.4 mm pitch	SOT2074-1

4.1 Ordering options

[Table 2](#) describes the ordering options for PTN3222HM.

Table 2. Ordering options

Type number	Orderable part number	Package	Packing method	Minimum order quantity	Temperature
PTN3222HM	PTN3222HMJ	XQFN12	Reel dry pack, 13" Q1	18000	T _{amb} = -40 °C to 85 °C

4.2 Top side marking

[Table 3](#) describes the top side marking for PTN3222HM.

Table 3. Top side marking

Line number	Character	Content	Remarks
Line A	1	Pins 1 dot	Pin 1 indication
	2-3	Product life cycle	Product status: <ul style="list-style-type: none">• "2H": Production silicon
Line B	1-3	Production information	Lot ID
Line C	1-2	Production information	Lot ID
	3	Production information	Wafer number

5 Functional diagram

This section shows the functional block diagram.

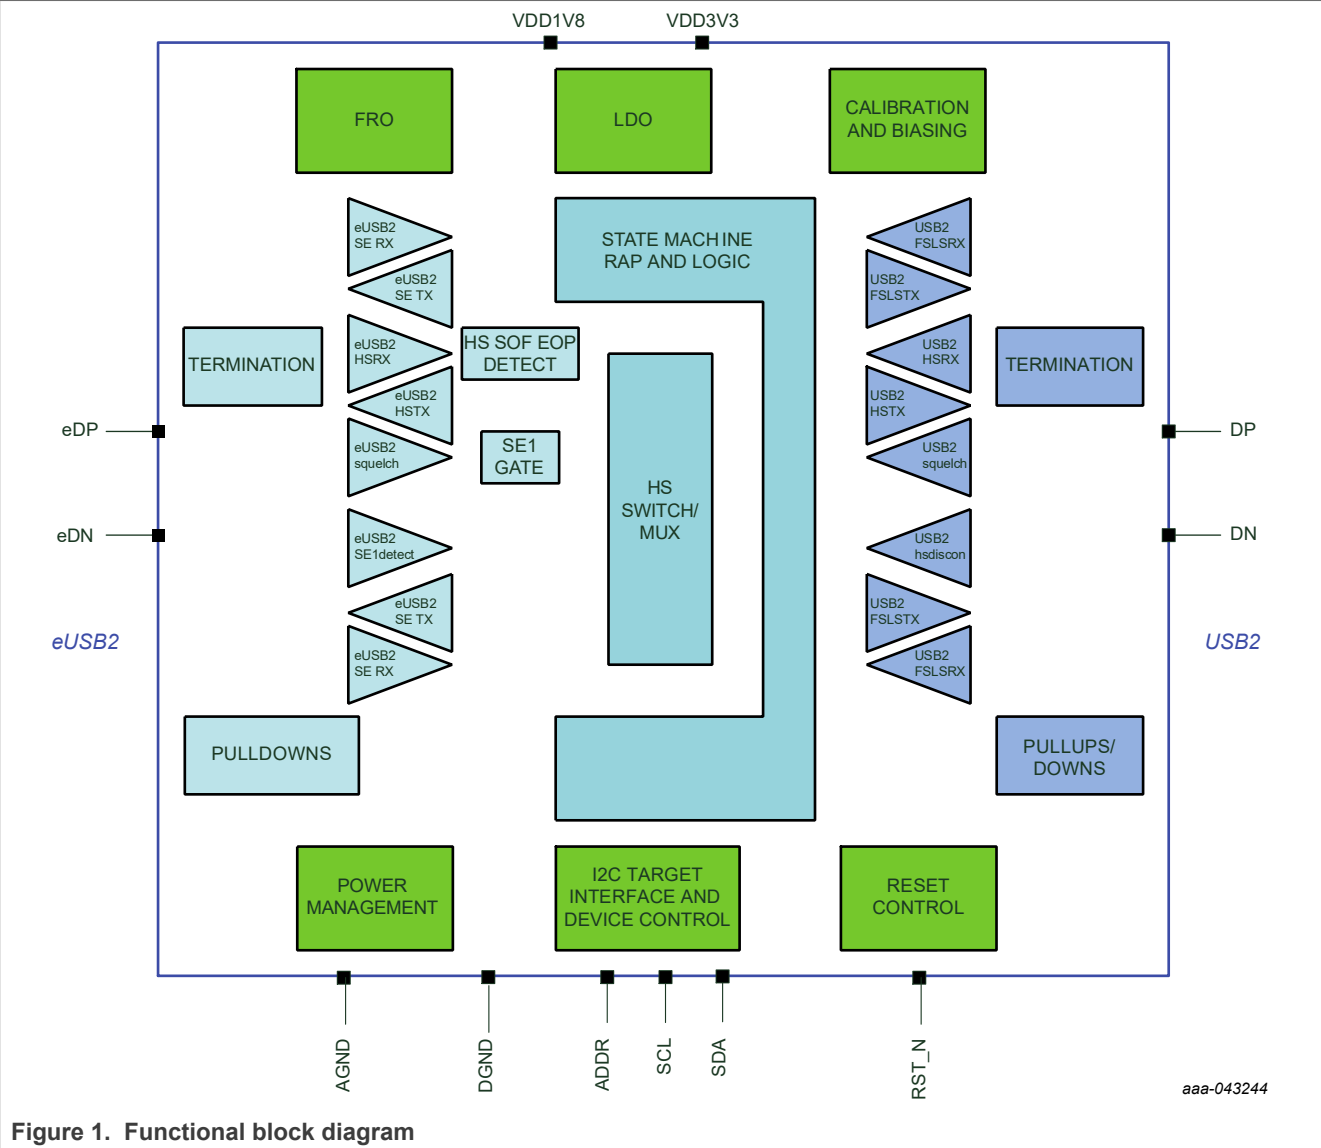



Figure 1. Functional block diagram

6 Pinning information

This section provides the pin configuration and description of PTN3222HM.

6.1 Pinning

Figure 2 shows the pin configuration of PTN3222HM.

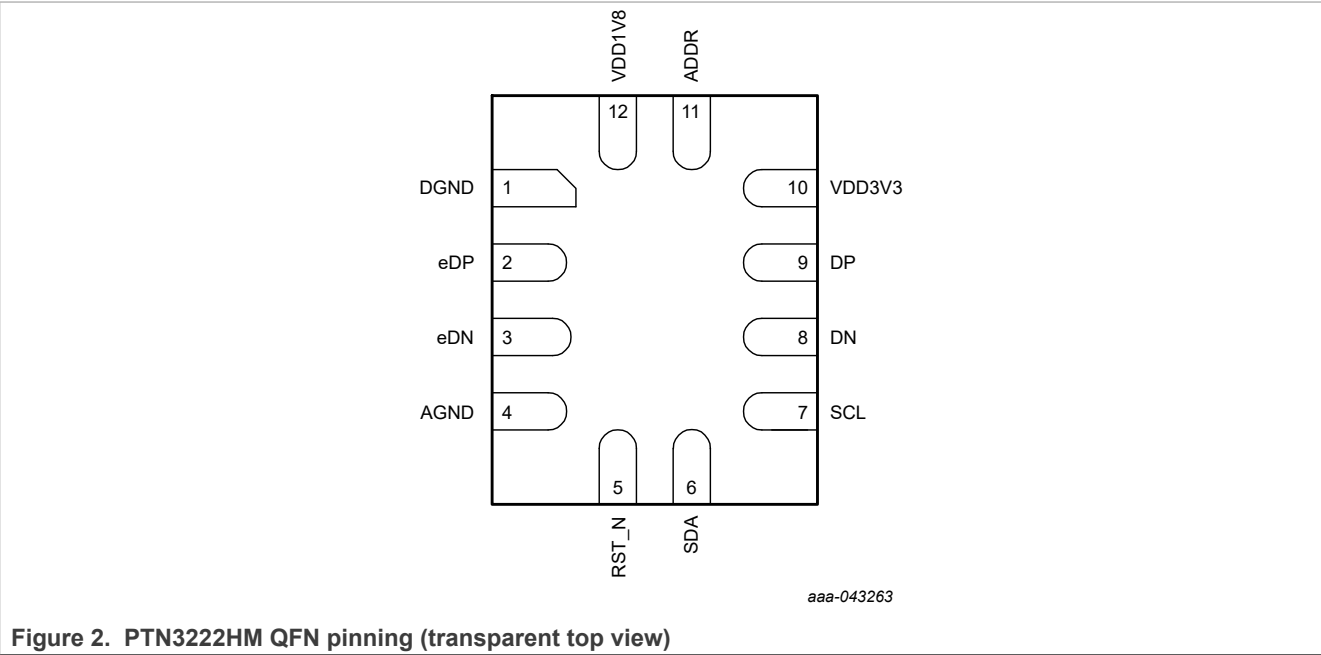

6.2 Pin description

Table 4 provides detailed description of various pins on PTN3222HM.

Table 4. Pin description

QFN pin	Symbol	Direction	Pad power domain	Type	Description
1	DGND	OUT		Power	Digital ground. This pin is connected to a low-noise ground plane and avoids long PCB traces
12	VDD1V8	IN		Power	1.8 V power supply. 0.47 μ F and 33 pF decoupling capacitors are placed on this pin on the PCB
10	VDD3V3	IN		Power	3.3 V power supply. 0.47 μ F and 33 pF decoupling capacitors are placed on this pin on the PCB
2	eDP	IO	VDD1V8	Analog input/output	Positive terminal of eUSB2 analog transceiver interface
11	ADDR	IN	VDD1V8	Analog input	Quaternary pin for I ² C target address selection (sampled once after POR and when power supplies are stable and valid). The external pullup resistor shall be placed close enough to the decoupling capacitors of VDD1V8
9	DP	IO	VDD1V8, VDD3V3	Analog input/output	Positive terminal of USB2 analog transceiver interface DP pin has an internal 2 M Ω pulldown resistor enabled under all situations
3	eDN	IO	VDD1V8	Analog input/output	Negative terminal of eUSB2 analog transceiver interface
5	RST_N	IN	VDD1V8	Digital input	This is an active LOW input pin. When RST_N is LOW, PTN3222HM's DP and DN pins are put to hi-Z condition and redriver is placed in Deep standby state. When RST_N is HIGH, the redriver is put into repeater mode

Table 4. Pin description...continued

QFN pin	Symbol	Direction	Pad power domain	Type	Description
8	DN	IO	VDD1V8, VDD3V3	Analog input/output	Negative terminal of USB2 analog transceiver interface DN pin has an internal 2 MΩ pulldown resistor enabled under all situations
4	AGND	OUT		Power	Analog low noise ground. This pin must connect to PCB ground plane, avoid long PCB traces, and not be routed near noisy circuits
6	SDA	IO	VDD1V8	Digital input/output	I ² C data input/output. There is no internal pullup resistor, and an external pullup resistor to I ² C pullup voltage must be used on the PCB
7	SCL	I	VDD1V8	Digital input	I ² C clock input. There is no internal pullup resistor, and an external pullup resistor to I ² C pullup voltage must be used on the PCB

7 Functional description

PTN3222HM consists of the following major functions:

- eUSB2 repeater
- OEM Bypass function
- BC1.2 support
- I²C interface
- Reset schemes

7.1 Reset

PTN3222HM supports the following reset schemes:

- POR
- Software reset

When in reset, PTN3222HM's SCL and SDA IO pins are in high-impedance state to prevent the I²C bus from being altered or corrupted in any way.

The RST_N pin is used to put USB DP/DN IO circuitry is put into hi-Z condition and USB2 pins are pulled down with 2 MΩ resistors. The redriver is also placed in Deep standby condition. The I²C configuration registers are retained except for Link control, Device status, and RAP Signature registers. As long as the system asserts this pin low, the IC is held in this state. When RST_N is HIGH, then the redriver is put into repeater mode.

7.2 Operating modes

PTN3222HM has several operating modes: a specific operating mode is selected depending on repeater configuration, link, and connection status. [Table 5](#) below gives a high-level overview of the major building blocks that are kept powered in different modes.

Table 5. Status of design blocks in different power modes

Power Mode	I ² C interface	FS/LS front ends	HS front ends
OFF	OFF	OFF	OFF
Deep standby	ON	OFF	OFF
Connect Detect (Detached condition)	ON	ON (SE detector only)	OFF
L1 sleep	ON	ON (SE detector only)	HS OFF; only SE detector is ON


Table 5. Status of design blocks in different power modes...continued

Power Mode	I ² C interface	FS/LS front ends	HS front ends
L2 suspend	ON	ON (SE detector only)	HS OFF; only SE detector is ON
Active LS/FS	ON	ON	OFF
Active HS	ON	OFF	ON

7.3 eUSB2 repeater


This subsystem includes eUSB2 analog front end circuitry, repeater state machine, USB2 analog front end circuitry, and the associated power management circuits. The USB2 DP/DN pin have internal 2 MΩ pulldown resistors enabled under all situations.

PTN3222HM is designed to function as a host repeater or a peripheral repeater. [Figure 3](#) illustrates the role transition and associated arcs that enable role change.

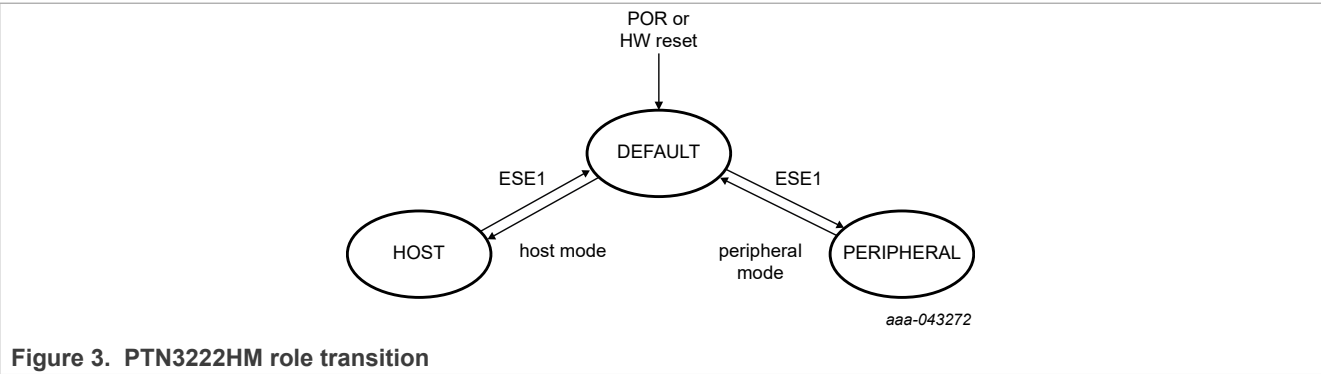


[Figure 4](#) illustrates the eUSB2 host repeater usage in a typical host platform application.

On one side, the repeater interfaces with a USB2 peripheral (that is either plugged in directly or via cable/channel topology). On the system side, it interfaces with the host controller w/eUSB2 PHY.

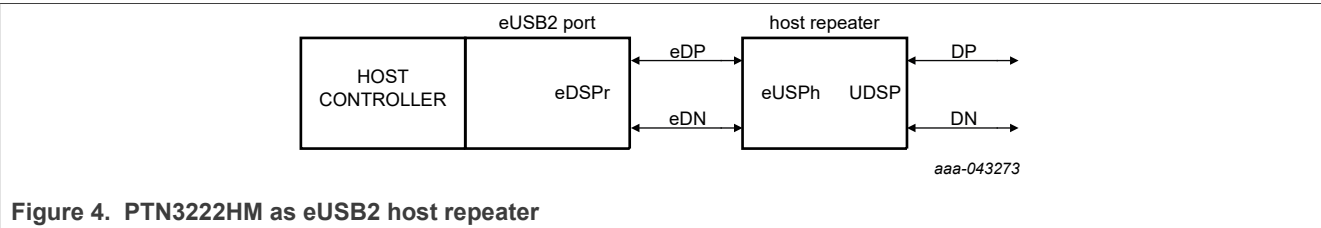

[Figure 5](#) illustrates the eUSB2 Device repeater usage in a typical peripheral environment.

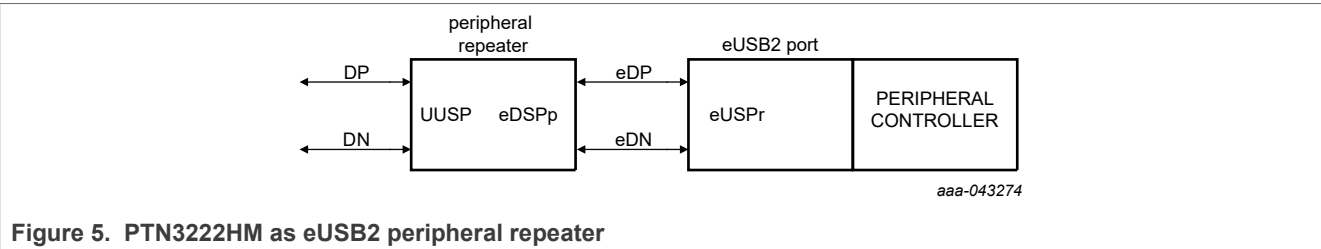

PTN3222HM implements aggressive power management to optimize on overall power consumption under the various operating modes. It supports USB link power management and supports L1 and L2 power states. In addition, it implements specific features required by [4].

PTN3222HM supports RAP – allowing customer facing registers only. The type of access is controlled via an I²C register. There is no built-in arbitration support available if and when the same register is being accessed through RAP commands and I²C interface. The system application is expected not to issue simultaneous accesses, avoid register overwrites leading to incorrect behavior and response from PTN3222HM.

PTN3222HM accepts RAP messages at any time even though host is expected to issue RAP messages only during initialization. If the host would use RAP messages to read status register(s) or update any control register(s), PTN3222HM does not inhibit or put limits on RAP messages as long as it is in the mode wherein customer I²C registers are accessible.

For the Auto resume feature to work, the host software must set bit 1 of LINK CONTROL 2 register (0x03) to 1.

7.3.1 Overvoltage protection on USB2 DP/DN pins

PTN3222HM implements Over Voltage Protection (OVP) circuitry, which activates whenever an OV condition occurs on USB2 DP/DN pins, PTN3222HM operates autonomously without host software intervention. The following describes a possible sequence of steps that can occur due to an OV event:

1. PTN3222HM checks DP/DN pin(s) for over voltage condition that is higher than $V_{OVP,Th}$ (Low to High Threshold case). It shuts down the USB2 analog IO as long as the event persists
2. PTN3222HM enables USB2 analog IO path once the pin voltage falls below $V_{OVP,Th}$ (High to Low Threshold case)
3. The SoC host and eUSB2 redriver would lose communication with the USB2 entity since the analog path has been disabled
4. So, the SoC host can try the following options to reestablish the link
 - a. issue CM. Reset in an attempt to issue a USB Bus Reset or,
 - b. issue Port reset to the local redriver and also toggle VBUS to re-establish the connection and restart the data transport.

Note that option (a) may not be successful depending on the nature of the fault but is the fastest and least aggressive error recovery method. Use of Port Reset and toggling of VBUS are guaranteed to work, but comes with a downside of longer time duration to reestablish the link.

7.4 BC1.2 support

PTN3222HM has a built-in support for enabling CDP (Charging Downstream Port) feature that allows a mobile device to detect and charge at higher current from the host platform. For the BC1.2 support, this IC implements a controlled voltage source that can be enabled on USB2 DN pin via an I²C register bit. The host processor can enable this feature via I²C during USB disconnect condition. The PTN3222HM can autonomously disable this on a USB connect event and reset this I²C configuration bit.

This feature is expected to be applied when in host repeater mode only. However, the PTN3222HM does not inhibit enabling of this feature in device repeater mode.

7.5 I²C operation

PTN3222HM is an I²C target only device, and it responds to I²C commands in any operating mode as long as VDD3V3/VDD1V8 supplies are available. PTN3222HM does not support clock stretching but it tolerates other I²C targets performing clock stretching under the legal conditions defined by [1]. Also, it does not support I²C general call address (and therefore does not issue an acknowledgment), I²C Software reset command nor 10-bit addressing. It acknowledges all 128 register offset addresses though there are certain undefined/reserved locations as indicated in the register map.

Each I²C operation involving writing to or reading from one or more consecutive registers is referred to as a transaction. Consecutive registers are defined as a series of incrementing register addresses, regardless of whether a given address has a definition in the register map.

A transaction can be a part of a series of transactions addressed to multiple different targets or to the same target repeatedly with different register address offsets, with each transaction separated by repeated-START conditions. PTN3222HM does not inhibit other types of transactions as prescribed in I²C specification.

Register address aliasing is not supported in PTN3222HM. When read or write transactions with multiple consecutive registers are performed, the register address rolls over to 0x00 once the maximum register offset of 0xFF is reached.

When an undefined or invalid register address is being addressed for read or write operation, PTN3222HM acknowledges the I²C transaction, but returns 0xFF for a read operation, or takes no action for a write operation.

7.5.1 I²C target address

PTN3222HM's 7-bit I²C target address is given in [Table 6](#). Bits 3 and 4 can take one of the four possible values based on the quaternary address selection pin (ADDR).

Table 6. PTN3222HM target address definition

ADDR pin configuration	Bit 7	Bit 6	Bit 5	ADDR		Bit 2	Bit 1	Bit 0
				Bit 4	Bit 3			
Connected to 1.8 V supply directly	1	0	0	0	0	1	1	R/W
Connected to 1.8 V supply via 56 kΩ (+/-10 %) pull-up	1	0	0	0	1	1	1	R/W
Connected to 1.8 V supply via 200 kΩ (+/-10 %) pull-up	1	0	0	1	0	1	1	R/W
Connected to GND directly	1	0	0	1	1	1	1	R/W

7.5.2 Example of writing one or more registers

PTN3222HM recognizes the following procedure as a request to write to one or more registers:

1. The I²C controller asserts the START condition or repeated-START condition
2. Controller addresses PTN3222HM target interface with R/W bit set as "Write"
3. Target acknowledges the request by asserting an ACK
4. The controller writes the desired starting register address
5. Target acknowledges the register address with ACK, even if the register address is not part of the defined register map
6. The controller writes the data for that register address and the target updates the register value once all 8 bits of data have been written
7. Target acknowledges the data with an ACK
8. If the controller wishes to write to the next consecutive register address, it supplies another data byte, which the target ACKs. The controller can continue writing data bytes for consecutive registers. If the controller writes to more consecutive registers than what exists in the register map, the target discards the extra data bytes, but ACKs for each such write

When the controller has finished writing the desired register(s), it issues either a STOP condition or a repeated-START condition.

Figure 6 provides an illustrative example where the controller chooses to write to three consecutive registers starting with register “R”.




Figure 6. Writing one or more consecutive registers

7.5.3 Example of reading one or more registers

The target recognizes the following procedure as a request to read one or more registers:

1. Controller asserts START condition or repeated-START condition
2. Controller addresses PTN3222HM's target address with R/W bit set as “Write”
3. Target acknowledges the request by asserting ACK
4. The controller writes the desired starting register address
5. Target acknowledges the register address with ACK, even if the register address is not part of the defined register map
6. The controller issues a repeated-START condition
7. Controller addresses PTN3222HM's target address with R/W bit set as “Read”
8. In the following clock pulses, the target clocks out the value of the requested register
9. If the controller wishes to read the next consecutive register, it issues an ACK and then provides another set of clock pulses, whereby the target supplies the value of the next register. As long as the controller continues to issue ACK and supply additional clock pulses, the target continues to supply the value of consecutive registers. If the controller attempts to read consecutive registers that do not exist in the defined register space, the target can return an undefined data value of 0xFF.
10. When the controller does not wish to read additional consecutive registers, it supplies a NACK in response to the final register value it wishes to read and then issues a STOP or repeated-START condition.

Figure 7 provides an illustrative example where the controller chooses to read from two consecutive registers starting with register “R”.

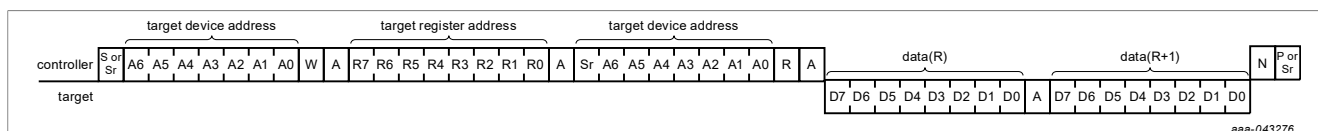


Figure 7. Reading one or more consecutive registers

8 System application

This section covers the following aspect of the PTN3222HM:

- Use cases
- Power supply requirement
- Ground requirement
- ESD requirements
- Application support

8.1 Use cases

PTN3222HM is targeted to be used in various USB interface application cases. It interfaces to a host or device controller with eUSB2 PHY interface. On the other side, it interfaces directly to a connector/cable topology or

another interface IC. Different connector configurations are possible: custom, USB Standard A/Standard B, USB micro-B, USB-Type C, and so on. For all use cases, it is not necessary for the host to initialize the I²C registers after the POR or reset event. On the contrary, PTN3222HM functions without any I²C configuration by relying on registers getting initialized after POR event.

A few use case illustrations are shown in [Figure 8](#) through [Figure 11](#). These figures do not capture all components (supply decoupling capacitors, ESD, CMF, and so on) in the channel topology.

1. **Direct interface to connectors:** This connectivity scheme is a straightforward topology and it can be relevant for generic IOT and certain computing applications. In certain applications, the I²C interface may not be connected and the repeater is expected to start operating after POR based on POR/default register settings.

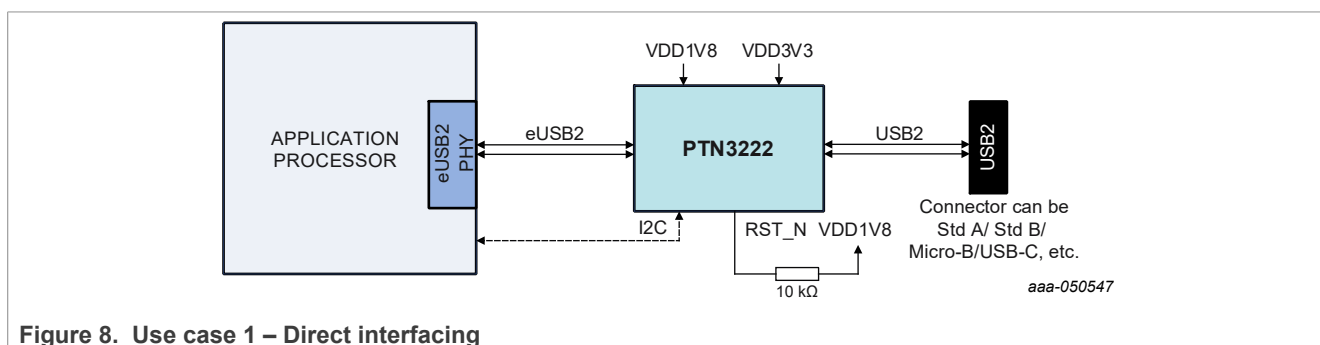


Figure 8. Use case 1 – Direct interfacing

2. **Interface via USB protection IC:** This connectivity scheme is relevant for applications where there is a risk/chance of high voltage appearing on the USB data pins (for example, USB-C). In certain applications, the I²C interface may not be connected and the repeater is expected to start operating after POR based on POR/default register settings. Care must be taken to select a suitable protection IC that has certain USB2 signal attenuation/RdsON. Also, the default power up scenario must be analyzed.

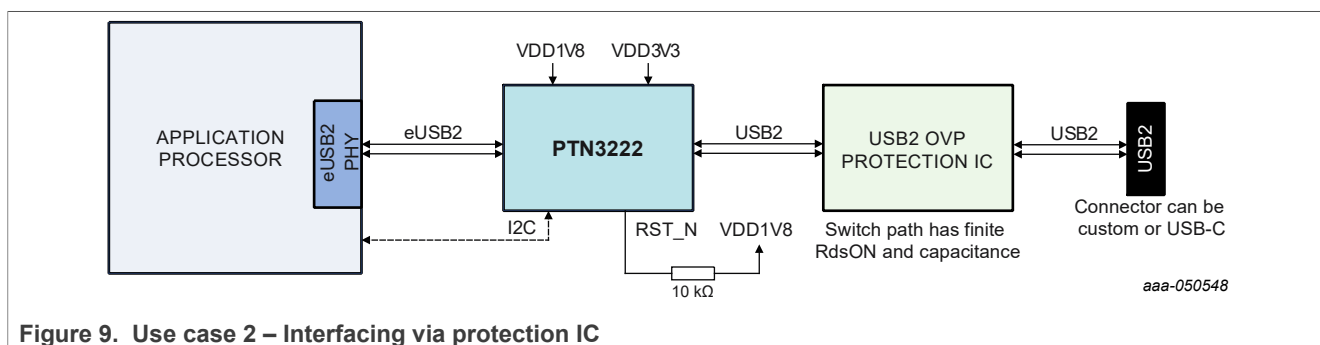


Figure 9. Use case 2 – Interfacing via protection IC

3. **Interface with parallel connection to PMIC:** This interfacing scheme is relevant for mobile applications (smartphone, tablets, and so on), where there is a high chance of system integrator using a PMIC interface to support various platform-specific functions. Since there are two ICs connected to USB DP/DN data pins, the RST_N pin allows the system to put PTN3222's DP/DN IO circuitry to hi-Z condition and connect 2 MΩ pulldown resistors on DP/DN pins so that the interface PMIC can use the DP/DN pins for other purpose(s). In certain applications, the I²C interface may not be connected and the repeater is expected to start operating after POR based on POR/default register settings.

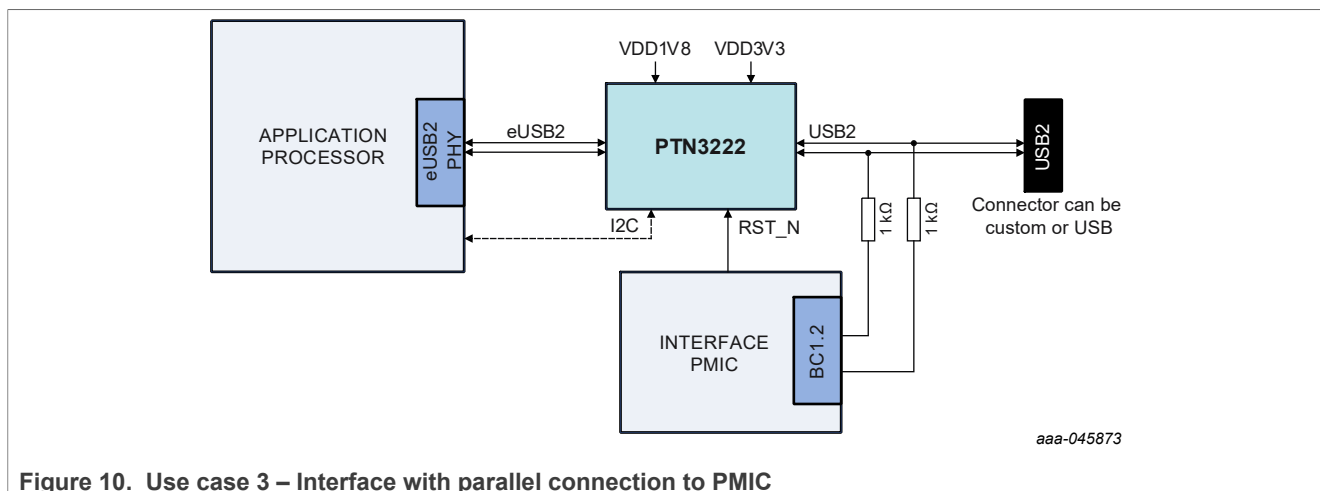


Figure 10. Use case 3 – Interface with parallel connection to PMIC

4. **Interface to connector via passive signal switch:** This connectivity scheme provides the option to switch on various debug and communication signals to the same connector. In certain applications, the I²C interface may not be connected and the repeater is expected to start operating after POR based on POR/default register settings. The passive signal switch must be selected to ensure low signal attenuation and also the power up scenario must be carefully analyzed. The RST_N pin shall be pulled up with 10 kΩ resistor externally either in the SoC or on the PCB.

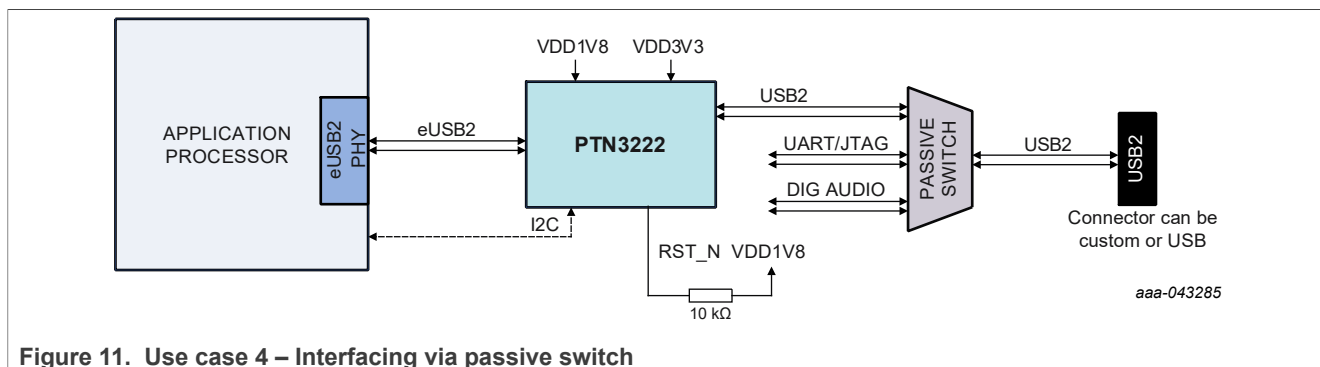


Figure 11. Use case 4 – Interfacing via passive switch

8.2 Power supply requirement

PTN3222HM requires two power supplies (VDD3V3 and VDD1V8) to operate. It does not function until both supplies have ramped up and reached valid operating range. There is no specific power on or off sequencing requirement. In addition, the two supplies can follow different ramp-up and ramp-down rates. The supply ramp limits are specified in [Section 11](#).

PTN3222HM does not suffer from backpower issue (VDD node getting powered via a non-power pin).

The power supply decoupling capacitors shall be soldered close to power pins.

8.3 Ground requirement

PTN3222HM has two ground pins, AGND, and DGND.

Both pins provide connection to GND plane with low ground noise in the application PCB.

8.4 ESD requirements

PTN3222HM supports 2 kV HBM and 500 V CDM on all pins. To achieve system level ESD protection (for example, IEC61000-4-2 Level 4 8 kV contact discharge, 15 kV air discharge) on DP/DN pins, dedicated and matched ESD diodes shall be used near the connector. Matching of diodes is important to minimize DP/DN skew.

8.5 Application support

NXP can deliver PTN3222HM customer support documentation and IBIS-AMI model for system level signal integrity simulation. The documentation includes Application note and layout guidelines (see [Section 16](#)). Contact NXP support teams for further details.

9 Register set

The device is controlled and monitored by registers accessible via the I²C bus. All registers can be accessed in standard mode or fast mode using single or sequential reads or writes. Register bit field types are defined in [Table 7](#).

Table 7. Register type definitions

Access Type	Description
RW	Bit field can be read from and written to
RO	Bit field value can only be read
WO	Bit field value is write only. Reading value has no meaning, and results in no action being taken
RAZ	Bit field contents are read as zero. Writes do not have any effect
R/W1, W0 Ignore	Bit field value is readable, and writing 'b1 to each bit in the bit field sets the value to 'b1. Writing 'b0 to this bit field results in no action being taken

9.1 Register overview

[Table 8](#) lists all the registers used for PTN3222HM. Default POR values of registers are also shown in this table.

Table 8. Register overview

Address	Register name	Access	RESET		Default Value (Hex)	Information of individual bits							
			POR	Software Reset (or RST_N		7	6	5	4	3	2	1	0
0x00	RESERVED	RAZ			00								
0x01	RESET CONTROL	RW	•		00								Software Reset
0x02	LINK CONTROL 1	RW	•	•	00	Speed control		Role control			Operational mode		
0x03	LINK CONTROL 2	RW	•	•	00							Auto_resume_en	Force ESE1
0x04	eUSB2 RX CONTROL	RW	•	•	20			eUSB2 HS RX squelch detection threshold			eUSB2 HS RX equalization		
0x05	eUSB2 TX CONTROL	RW	•	•	10			eUSB2 HS TX output swing				eUSB2 HS TX De-emphasis	
0x06	USB2 RX CONTROL	RW	•	•	40		USB2 RX squelch detection threshold				USB2 HS RX equalization		
0x07	USB2 TX CONTROL 1	RW	•	•	22			USB2 HS TX De-emphasis bit duration			USB2 HS TX De-emphasis		
0x08	USB2 TX CONTROL 2	RW	•	•	63		USB2 FS rise/fall time	USB2 HS rise/fall time			USB2 HS TX output swing		
0x09	USB2 HS TERMINATION	RW	•	•	02						USB2 HS termination control		
0x0A	USB2 HS DISCONNECT THRESHOLD	RW	•	•	00							USB2 HS disconnect detection threshold	
0x0B - 0x0C	RESERVED	RO			XX								
0x0D	RAP_Signature	RW	•	•	00	RAP_Signature							
0x0E	VDX_CONTROL	RW	•	•	00								VDx_enable
0x0F	DEVICE STATUS	RO	•	•						Speed of operation status		Repeater status	
0x10	LINK STATUS	RO	•	•							Device and Link status		
0x11 - 0x12	RESERVED	RAZ			XX								
0x13	REVISION_ID	RO			A4	BASE = b'1010				METAL_ = b'0100			
0x14	CHIP_ID_0	RO			22	CHIP_ID[7:0]=0x22							
0x15	CHIP_ID_1	RO			32	CHIP_ID[15:8]=0x32							
0x16	CHIP_ID_2	RO			01	b'0000						b'01	
	RESERVED	RO			XX	Reserved register space							

9.2 I²C registers and descriptions

This section provides an overview of the various registers used in the PTN3222HM, along with their descriptions.

9.2.1 Functional registers

The offset addresses with defined bit definitions are meant for functional registers, and can be accessed by the I²C controller at any time after POR. For normal operation, these registers are sufficient to set up the IC to known working conditions. Customers are advised not to write reserved values into the register bit fields. Read from the reserved bit field(s) need not match the value written. If such an operation is performed, functional behavior is not guaranteed.

Table 9. Register 0x00 – RESERVED

Register offset		Register name		Register description
0x00		RESERVED		
Bit	Bit name	R/W	Reset	Description
7:0	RSVD	RAZ	b'00000000	Reserved

Table 10. Register 0x01 – RESET CONTROL

Register offset		Register name		Register description
0x01		RESET CONTROL		This register is meant to initiate reset of the chip via I ² C write.
Bit	Bit name	R/W	Reset	Description
7:1	RSVD	RAZ	b'00000000	Reserved
0	Software Reset	R/W	b'0	This is a Self-clearing bit. The host writes '1' to this bit to initiate software reset and this bit automatically clears to '0'. All R/W registers are reset to POR settings. Writing '0' does not have any effect. Reads return '0'.

Table 11. Register 0x02 – LINK CONTROL 1

Register offset		Register name		Register description
0x02		LINK CONTROL 1		This register is meant to force the repeater role and speed of operation to fixed settings.
Bit	Bit name	R/W	Reset	Description
7:6	Speed control	RW	b'00	The bit field determines the POR setting of USB2 speed: 00: Manage the speed through auto negotiation 01: LS/FS only 10-11: Reserved
5:4	Role control	RW	b'00	Determines the redriver role 00: Dual role Support both host and device eUSB2 Port Configuration negotiation. This is the expected normal operating setting managed via Host eUSB2 exchanges. 01: Force Host role When bits are '01', it forces the repeater into the USB Host role irrespective of any configuration command getting received via eUSB2. But the repeater would acknowledge the configuration message from the host. 10: Force Device role When the bits are '10', it forces the repeater into the USB Device/peripheral role irrespective of any configuration command getting received via eUSB2. But the repeater would acknowledge the configuration message from the host. 11: Reserved Forced host/device role setting is used in conjunction only with setting '2' of Link Control 2[2:0] bits.
3	RSVD	RAZ	b'0	Reserved

Table 11. Register 0x02 – LINK CONTROL 1...continued

Register offset		Register name		Register description
2:0	Operational Mode	RW	b'000	<p>The bits set the operational mode of the repeater</p> <p>0: Auto negotiation on the link (mode determined via control messages and link negotiation)</p> <p>1: Deep Standby mode (eUSB2 pins are pulled down, USB2 pins are held in weak pulldown condition, and I²C register contents are preserved.)</p> <p>2: Connect.Detect state. Used to force the repeater into its Connect.Detect state (refer to eUSB specification). - This is acted upon only at the time that the write occurs to this register. If an overriding condition is present, such as RST_N=0, then writing to this register with this setting is ignored, even when the overriding condition goes away.</p> <p>Note that in this case the Role Control field (in register 0x02) must have only a single bit set. Those bits are used to tell the repeater which role to jump into - This command places the repeater into the appropriate Connect.Detect state (based on specified role in Role Control). After the state transition occurs, the repeater automatically reacts from there as appropriate to the eUSB/USB2 bus conditions.</p> <p>3: Compliance Mode (HS L0 condition). This is equivalent to the reception of the Control Message CM.Test. It allows the system to force the repeater into HS.L0 state. The role is defined by the Role Control bits. Note that in this case, the Role Control setting must have only a single bit set. If both or neither bit is set, then this command is ignored.</p> <p>4 to 7: Reserved</p>

Table 12. Register 0x03 – LINK CONTROL 2

Register offset		Register name		Register description
0x03		Link Control 2		This register programs-specific feature of the repeater.
Bit	Bit name	R/W	Reset	Description
7:2	RSVD	RAZ	b'0000000	Reserved
1	Auto Resume Enable	RW	b'0	<p>Auto Resume enable: This is a Host side repeater feature</p> <p>0: Auto Resume Feature Disabled</p> <p>1: Auto Resume Feature Enabled: Host side repeater handles the Remote Wake/Resume sequence (during wake, the repeater drives USB and eUSB interfaces with 'K' signaling until the host controller's Start of Resume ends, then it passes the host controller's Resume signaling to the USB2 bus.</p>
0	Force ESE1	RW	b'0	<p>Bit to force Extended SE1 signaling</p> <p>0: No action</p> <p>1: Self-Clearing bit. When written to 1, Repeater generates extended SE1 onto the eUSB pins.</p> <p>Normally, only the Host Repeater performs this action upon an HS disconnect detection. But this feature allows the system to force an extended SE1 as needed via the I²C interface.</p>

Table 13. Register 0x04 – eUSB2 RX CONTROL

Register offset		Register name		Register description
0x04		eUSB2 RX CONTROL		This register programs the eUSB2 RX equalization and squelch detection threshold settings.
Bit	Bit name	R/W	Reset	Description
7:6	RSVD	RAZ	b'00	Reserved
5:4	eUSB2 HS RX Squelch detection threshold	RW	b'10	The bits determine the squelch detector (Low to High transition) threshold level for HS signaling on eUSB2 pins. 00: 50 mV 01: 65 mV 10: 85 mV 11: 95 mV All settings are within +/-25 mV of the nominal value mentioned above. Squelch detector implements hysteresis of 10 mV to improve noise immunity.
3	RSVD	RAZ	b'0	Reserved
2:0	eUSB2 HS RX equalization	RW	b'000	The bits determine the nominal eUSB2 receive equalization gain (@ 240 MHz) with respect to DC gain. All settings are within +/-1 dB of nominal value mentioned below: 000: 0 dB 001: 1 dB 010: 2 dB 011: 3 dB 100: 4 dB 101 to 111: Reserved

Table 14. Register 0x05 – eUSB2 TX CONTROL

Register offset		Register name		Register description
0x05		eUSB2 TX CONTROL		This register configures the Transmit side settings – output signal swing and de-emphasis level on the eUSB2 side.
Bit	Bit Name	R/W	Reset	Description
7:6	RSVD	RAZ	b'00	Reserved
5:4	eUSB2 HS TX output swing	RW	b'01	The bits set the output signal swing for HS signaling on eUSB2 TX side (when the interface is terminated). 00: 180 mV 01: 200 mV 10: 220 mV 11: 240 mV All settings are within +/-40 mV of the nominal value mentioned above.
3:2	RSVD	RAZ	b'00	Reserved
1:0	eUSB2 HS TX de-emphasis	RW	b'00	The bits determine the TX de-emphasis (nominal) level for HS signaling on eUSB2 pins. The de-emphasis duration is between 0.75 to 1 HS bit time. 00: 0 dB 01: 1 dB

Table 14. Register 0x05 – eUSB2 TX CONTROL....continued

Register offset	Register name	Register description
		10: 2 dB 11: 3 dB All settings other than '00' are within +/-1 dB of the nominal value mentioned above.

Table 15. Register 0x06 – USB2 RX CONTROL

Register offset		Register name		Register description
0x06		USB2 RX CONTROL		The register programs the RX equalization and squelch detection threshold levels on USB2 pins (applicable for HS signaling only).
Bit	Bit name	R/W	Reset	Description
7	RSVD	RAZ	b'0	Reserved
6:4	USB2 HS RX squelch detection threshold	RW	b'100	The 3 bits determine the squelch detector (low to high transition) threshold level for HS signaling at USB2 pins. 000: Reserved; not for use 001: 65 mV 010: 85 mV 011: 95 mV 100: 110 mV 101: 125 mV 110: 140 mV 111: 155 mV All settings are within +/-25 mV of nominal value mentioned above. Squelch detector implements hysteresis of 10 mV to improve noise immunity.
3	RSVD	RAZ	b'0	Reserved
2:0	USB2 HS RX equalization	RW	b'000	The 3 bits determine the nominal USB2 receive equalization gain (@ 240 MHz) with respect to DC gain. All settings are within +/-1 dB of the nominal value mentioned below: 000: 0 dB 001: 1 dB 010: 2 dB 011: 3 dB 100: 4 dB 101 to 111: Reserved

Table 16. Register 0x07 – USB2 TX CONTROL 1

Register offset		Register name		Register description
0x07		USB2 TXCONTROL 1		This register configures the Transmit side settings – output signal swing and de-emphasis level on the USB2 side.
Bit	Bit name	R/W	Reset	Description
7:6	RSVD	RAZ	b'00	Reserved
5:4	USB2 HS TX De-emphasis bit duration	RW	b'10	The bits set the de-emphasis bit time (UI) for HS signaling on the USB2 TX side. 00: 0 01: 0.5UI 10: 0.8UI 11: Reserved All settings are within +/-0.2UI of the nominal value mentioned above.
3	RSVD	RAZ	b'0	Reserved
2:0	USB2 HS TX de-emphasis	RW	b'010	The bits determine the TX de-emphasis (nominal) level for HS signaling on USB2 pins. 000: 0 dB 001: 1 dB 010: 2 dB 011: 3 dB 100: 4 dB 101: 5 dB 110: 6 dB All settings other than '000' are within +/-1 dB of the nominal value mentioned above.

PTN3222HM implements a de-emphasis feature for channel loss compensation of high frequency content of both eUSB2 and USB2 signals.

[Figure 12](#) illustrates the difference between pre-emphasis and de-emphasis functions.

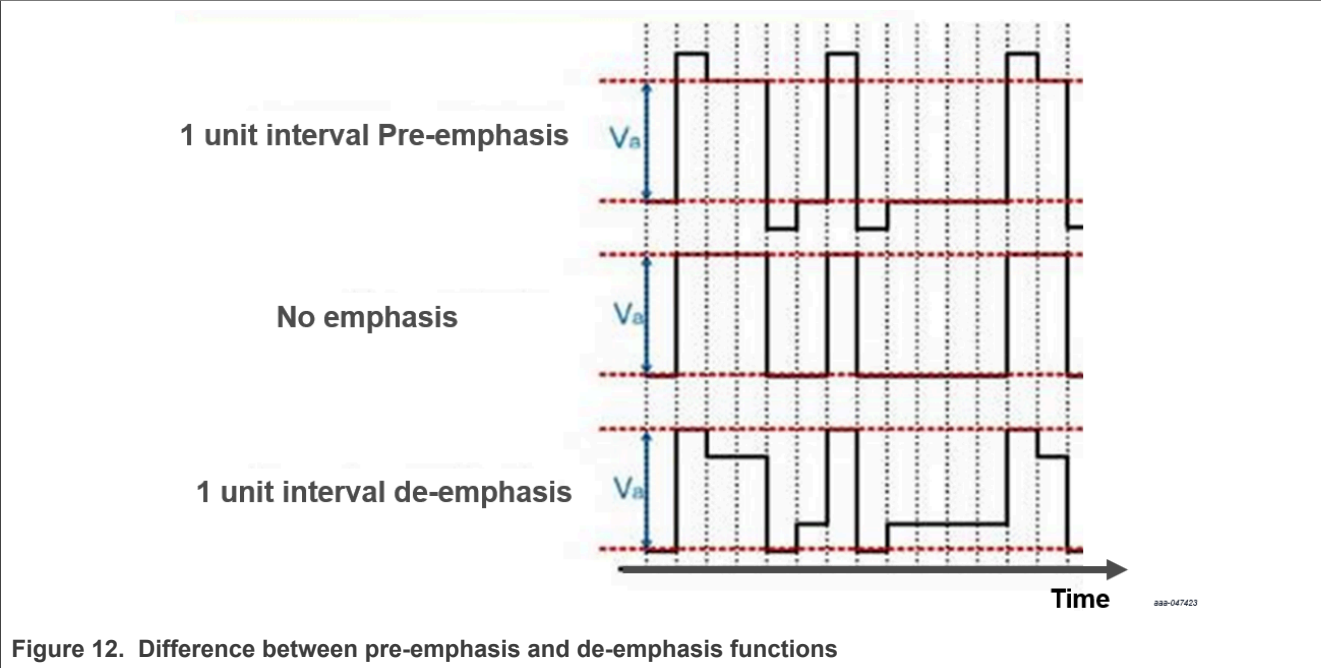


Figure 12. Difference between pre-emphasis and de-emphasis functions

With de-emphasis, when a steady pattern of 0s or 1s is being redriven, the transmit signal swing is reduced as per the de-emphasis level. For an alternating pattern of 0s and 1s, the full signal swing is transmitted as per the transmit signal swing level.

On the other hand, with pre-emphasis function, the full signal amplitude is retained when a steady pattern of 0s or 1s is being redriven. For an alternating pattern of 0s and 1s, the transmit signal swing is boosted as per pre-emphasis level.

The de-emphasis settings map to specific output current drive level as illustrated in [Table 17](#). The current drive level is with reference to 17.78 mA current considering 45 Ω terminations at both connection ends and 400 mV output swing level.

Table 17. De-emphasis level to USB2 TX output swing level

USB2 TXde-emphasis = 0.8UI (typical)															
USB2 TX output swing non-transition voltage (mV)		TXde-emphasis setting = 0		TXde-emphasis setting = 1		TXde-emphasis setting = 2		TXde-emphasis setting = 3		TXde-emphasis setting = 4		TXde-emphasis setting = 5		TX De-emphasis setting = 6	
		Transition level (mV)	Non-transition level (mV)	Transition level (mV)	Non-transition level (mV)	Transition level (mV)	Non-transition level (mV)	Transition level (mV)	Non-transition level (mV)	Transition level (mV)	Non-transition level (mV)	Transition level (mV)	Non-transition level (mV)	Transition level (mV)	Non-transition level (mV)
Setting= 0	350	352	352	347	304	347	270	347	237	347	212	347	194	340	169
Setting= 1	400	399	399	394	344	394	309	390	267	390	239	390	219	385	190
Setting= 2	450	451	451	447	388	447	352	442	305	442	279	442	244	442	220
Setting= 3	500	498	498	492	434	492	390	487	337	487	305	487	269	487	244
Setting= 4	550	551	551	546	473	544	427	544	375	544	337	538	301	538	269
Setting= 5	600	600	600	595	520	595	469	595	416	584	366	584	330	580	295
Setting= 6	650	656	656	649	566	645	509	645	454	634	398	634	355	618	310
Setting= 7	700	703	703	702	613	692	537	680	474	680	423	675	372	675	344

Table 18. Register 0x08 – USB2 TX CONTROL 2

Register offset		Register name		Register description
0x08		USB2 TX CONTROL 2		This register configures the Transmit side settings – TX output driver slew rate and output signal swing on the USB2 side.
Bit	Bit name	R/W	Reset	Description
7	RSVD	RAZ	b'0	Reserved
6	USB2 FS rise/fall time	RW	b'1	This bit determines the FS TX driver rise/fall time on USB2 pins. 0: 8 ns to 20 ns 1: 4 ns to 10 ns Load conditions are as defined in the USB standard
5:4	USB2 HS rise/fall time	RW	b'10	The 2 bits determine the TX driver slew rate for HS signaling on USB2 pins. 00: 500 ps to 900 ps 01: 400 ps to 800 ps 10: 300 ps to 700 ps 11: Reserved Load conditions are as defined in the USB standard.
3	RSVD	RAZ	0	Reserved
2:0	TX output signal swing	RW	b'011	The 3 bits determine the TX output signal swing level for HS signaling on USB2 pins (when the interface is terminated). 000: 350 mV 001: 400 mV 010: 450 mV 011: 500 mV 100: 550 mV 101: 600 mV 110: 650 mV 111: 700 mV All settings are within +/-10% of the nominal value mentioned above.

Table 19. Register 0x09 – USB2 HS TERMINATION

Register offset		Register name		Register description
0x09		USB2 HS TERMINATION CONTROL		This register sets the HS termination values on USB2 pins.
Bit	Bit name	R/W	Reset	Description
7:3	RSVD	RAZ	b'00000	Reserved
2:0	USB2 HS Termination control	RW	b'010	<p>The bits determine the HS termination on USB2 pins (differential impedance is specified here).</p> <p>000: 100 Ω differential</p> <p>001: 95 Ω differential</p> <p>010: 90 Ω differential</p> <p>011: 85 Ω differential</p> <p>100: 80 Ω differential</p> <p>101 to 111: Reserved</p> <p>All settings are within +/-10% of the nominal value mentioned above.</p>

Table 20. Register 0x0A – USB2 HS DISCONNECT THRESHOLD

Register offset		Register name		Register description
0x0A		USB2 HS DISCONNECT THRESHOLD		This register sets the HS disconnect threshold level on USB2 pins.
Bit	Bit name	R/W	Reset	Description
7:2	RSVD	RAZ	b'000000	Reserved
1:0	HS Disconnect threshold level	RW	b'00	<p>The bits determine the HS Disconnect detector threshold level on USB2 pins.</p> <p>00: 575 mV</p> <p>01: 675 mV</p> <p>10: 775 mV</p> <p>11: 875 mV</p> <p>All settings are within ± 50 mV of nominal value mentioned above.</p> <p>The detector implements hysteresis of 30 mV to improve noise immunity.</p>

Table 21. Register 0x0D – RAP Signature

Register offset		Register name		Register description
0x0D		RAP Signature		eUSB RAP Signature - Controls/limits RAP Command Access to the registers of the redriver.
Bit	Bit name	R/W	Reset	Description
7:0	RAP_Signature	RW	b'00000000	<p>0x00 - No RAP Access to PTN3222HM I²C Registers</p> <p>0x37: RAP allowed read only access to Status, REVISION_ID, and Chip ID registers</p> <p>0x92: RAP allowed read only access to I²C customer registers</p> <p>0x21: RAP allowed write/read access to I²C customer registers</p> <p>All others: No RAP Access to registers</p>

Table 22. Register 0x0E – VDX_CONTROL

Register offset		Register name		Register description
0x0E		VDX_CONTROL		PTN3222HM can be used to indicate that the host system is a USB BC 1.2 charging downstream port (CDP) to a USB peripheral. This involves activating a current source on USB DN pin (refer to USB BC 1.2 spec VDM_SRC definition).
Bit	Bit name	R/W	Reset	Description
7:1	RSVD	RAZ	b'00000000	Reserved
0	VDX_Ctrl	RW	b'0	VDX Control: Host Side Repeater Function 0: Disable VDX_SRC 1: Enable VDX_SRC The host enables VDX_SRC within 200 ms of a disconnect and PTN3222HM VDX_SRC circuitry is automatically disabled upon detection of the next connection.

Table 23. Register 0x0F – DEVICE STATUS

Register offset		Register name		Register description
0x0F		DEVICE STATUS		The register indicates the current state of repeater functionality. This register can only be read and writes don't have any effect.
Bit	Bit name	R/W	Reset	Description
7:4	RSVD	RAZ		Reserved
3:2	Speed of operation	RO		This bit shows the current state of repeater speed of operation. 00: LS 01: FS 10: HS
1:0	Repeater role	RO		This bit shows the current role played by the repeater. 00: No role determined yet 01: Device side repeater 10: Host side repeater

Table 24. Register 0x10 – LINK STATUS

Register offset		Register name		Register description
0x10		LINK STATUS		This status register reflects the current state of the repeater device and the link. This register can only be read and writes don't have any effect.
Bit	Bit name	R/W	Reset	Description
7:3	RSVD	RAZ		Reserved
2:0	Device Link status	RO		The status bits reflect the device and link state 000: Deep standby 001: Connect detect 010: L1 011: L2 101: Active HS (L0) 110: Active HS (L0) forced due to USB2 compliance mode 111: This setting represents a transitioning condition between different states (for example, Suspend to Resume to L0) .

Table 25. Register 0x13 – REVISION_ID

Register offset		Register name		Register description
0x13		REVISION_ID		The REVISION_ID register provides the silicon revision number. The Rev ID is a read only register whose value never changes.
Bit	Bit name	R/W	Reset	Description
7:4	BASE_STEP	RO	b'1010	Base layer version A stand for the 1 st version
3:0	METAL_STEP	RO	b'0100	Metal layer version 0 stands for the A0 version, '01' for the A1 version and '100' for the A4 version .

Table 26. Register 0x14 – CHIP_ID_0

Register offset		Register name		Register description
0x14		CHIP_ID_0		This ID register provides the lower 8 bits of the 16-bit chip part number (3222). The ID register is a read-only register whose value never changes.
Bit	Bit name	R/W	Reset	Description
7:0	CHIP_ID_0	RO	0x22	Lower 8-bit CHIP ID (0x22)

Table 27. Register 0x15 – CHIP_ID_1

Register offset		Register name		Register description
0x15		CHIP_ID_1		The ID register provides the upper 8 bits of the 16-bit chip part number (3222). The ID register is a read-only register whose value never changes.
Bit	Bit name	R/W	Reset	Description
7:0	CHIP_ID_1	RO	0x32	Higher 8-bit CHIP ID (0x32)

Table 28. Register 0x16 – CHIP_ID_2

Register offset		Register Name		Register Description
0x16		CHIP_ID_2		The ID register provides the Configuration image information 4 bits and CHIP type (2 bits). The ID register is a read-only register whose value never changes.
Bit	Bit name	R/W	Reset	Description
7:4	Configuration	RO	b'0000	Fixed configuration
3:2	RSVD	RAZ		Reserved
1:0	CHIP Type	RO	b'01	CHIP type

10 Limiting values

Stresses beyond those listed under absolute maximum ratings can cause permanent damage to the device. These are stress ratings only and do not imply functional operation of the device at these or beyond recommended conditions. Exposure to absolute-maximum-rated conditions for extended periods can affect device reliability. Within these ratings, damage to the part must not occur, and all characteristics must still be met after the part is returned to recommended operating conditions.

Typical (Typ) values are based on typical PVT (nominal process, VDD3V = 3 V, VDD1V8 = 1.8 V, and 25 °C). Min/Max values are based on all valid PVT ranges.

[Table 29](#) describes the limiting values of PTN3222HM.

Table 29. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134); all voltage values are with respect to network ground terminal.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
VDD1V8	1V8 Supply voltage		Design	-0.5		2.4	V	LTC-VOL-PRIO1-001
VDD3V3	3V3 Supply voltage		Design	-0.5		4	V	LTC -VOL-PRIO1-002
V _I	Input voltage	SCL, SDA	Design	-0.5		2.4	V	LTC -VOL-PRIO1-003
		RST_N	Design	-0.5		2.4	V	LTC -VOL-PRIO1-004
		eDP, eDN	Design	-0.5		2.4	V	LTC -VOL-PRIO1-005
		DP, DN	Design	-0.5		5.5	V	LTC -VOL-PRIO1-006
		ADDR	Design	-0.5		2.4	V	LTC -VOL-PRIO1-007
T _{stg}	Storage temperature		Design	-60		+150	°C	LTC -TMP-PRIO1-008
V _{ESD}	Electrostatic discharge voltage	Human-body model ^[1]	Design	2			kV	LTC -VOL-PRIO1-008
		Charged-device model ^[2]	Design	500			V	LTC -VOL-PRIO1-009
I _{LATCHUP}	Latch-up current		Design	100			mA	LTC -CUR-PRIO1-012

[1] Human body model: ANSI/EOS/ESD-S5.1-1994, standard for ESD sensitivity testing, human body model – component level; electrostatic discharge Association, Rome, NY, USA.

[2] Charged device model: ANSI/EOS/ESD-S5.3-1-1999, standard for ESD sensitivity testing, charged device model – component level; electrostatic discharge Association, Rome, NY, USA.

11 Recommended operating conditions

[Table 30](#) describes the recommended operation conditions for PTN3222HM.

Table 30. Operating conditions

Within these ratings, all characteristics in the following sections must be met unless noted otherwise. V_{PULLUP} is used to refer to I²C pullup voltage in the following sections. VDD1V8 refers to internal voltage reference used by PTN3222HM for determining the logic levels of SCL/SDA pins.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
VDD3V3	3V3 Supply voltage		ATE	2.85	3	3.63	V	ROC-VOL-PRIO1-001
VDD1V8	1V8 Supply voltage		ATE	1.62	1.8	1.98	V	ROC-VOL-PRIO1-002
t _{VDD_rampup}	Supply voltage ramp-up time	Between 0V and VDD3V3min/VDD1V8min	Bench	0.01		10	ms	ROC-TIM-PRIO1-003
VDD1V8	I ² C interface pullup voltage	1.8 V voltage reference used for I ² C pins (same as VDD1V8 supply)	ATE	VDD1V8, min	VDD1V8	VDD1V8, max	V	ROC-VOL-PRIO1-004

Table 30. Operating conditions...continued

Within these ratings, all characteristics in the following sections must be met unless noted otherwise. V_{PULLUP} is used to refer to I^2C pullup voltage in the following sections. $VDD1V8$ refers to internal voltage reference used by PTN3222HM for determining the logic levels of SCL/SDA pins.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
V_I	Input voltage	SCL, SDA	ATE	-0.3		1.98	V	ROC-VOL-PRIO1-006
		RST_N	ATE	-0.3		1.98	V	ROC-VOL-PRIO1-007
		eDP, eDN	ATE	-0.3		1.32	V	ROC-VOL-PRIO1-008
		DP, DN	ATE	-0.3		3.63	V	ROC-VOL-PRIO1-009
		ADDR	ATE	-0.3		1.98	V	ROC-VOL-PRIO1-010
T_{amb}	Ambient temperature	Operating in standing air environment – mobile/computing IOT market	Bench	-40		85	°C	ROC-TMP-PRIO1-011
T_J ^[1]	Junction temperature	Captured mainly to ensure that simulation is carried out in this temp corner		-40		125	°C	ROC-TMP-PRIO1-013

[1] PTN3222HM is simulated for functionality up to junction temperature of 125 °C, but it is not guaranteed to meet the power/current consumption specifications.

[Table 31](#) describes the thermal resistance of PTN3222HM.

Table 31. Thermal resistance

Symbol	Parameter	Conditions	Max	Unit	Unique identifier
$R_{th(j-a)}$, QFN	Thermal resistance from junction to ambient ^[1]	JESD51-7 2s2p	82	°C/W	THR-RES-PRIO1-001
Ψ_{JT} , QFN	Junction-to-Top of Package Thermal Characterization Parameter ^[2]	JESD51-7, 2s2p ^[3]	3.4	°C/W	THR-RES-PRIO1-002

[1] Determined in accordance with JEDEC JESD51-2A natural convection environment. Thermal resistance data in this report is solely for a thermal performance comparison of one package to another in a standard specified environment. It is not meant to predict the performance of a package in an application-specific environment.

[2] Thermal test board meets JEDEC specification for this package (JESD51-9).

[3] Junction-to-Case thermal resistance is determined using an isothermal cold plate. The case is defined as the bottom of the packages.

12 Characteristics

This section provides an overview of the characteristics of the following:

- Device characteristics
- USB2 and eUSB2 characteristics
- I^2C dynamic/static characteristics
- ADDR pin characteristics
- RST_N pin characteristics

12.1 Device characteristics

[Table 32](#) provides details of the device characteristics.

Table 32. Device characteristics

Applicable across operating temperature and power supply ranges as mentioned under Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
$t_{startup}$	Device startup time	Time for device operation including I^2C accesses once both supply voltages are within recommended operating levels	Bench			1	ms	DEV-TIM-PRIO1-001
t_{SW_reset}	Time for software reset to complete	Supply voltages are valid	Bench			0.5	ms	DEV-TIM-PRIO1-002

Table 32. Device characteristics...continued

Applicable across operating temperature and power supply ranges as mentioned under Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
t _{Cfg}	Device parameter (re)configuration time	Time for parameter (re)configuration values to take effect after I ² C programming (or RAP initialization)	Bench			0.5	ms	DEV-TIM-PRIO1-003
t _{DPSS_Exit}	Time duration that host has to wait before issuing further commands when PTN3222HM is exiting deep standby		Bench			275	µs	DEV-TIM-PRIO1-033
t _{PD}	Pin to pin differential propagation delay between eUSB2 and USB2 pins	Parameter configured for maximum signal path latency for USB2 HS data	Bench			3	ns	DEV-TIM-PRIO1-004
I _{supply,3V3}	VDD3V3 Supply current	Deep standby	ATE			7	µA	DEV-CUR-PRIO1-005
		Connect Detect substate	ATE			10	µA	DEV-CUR-PRIO1-006
		L2 suspend	ATE			10	µA	DEV-CUR-PRIO1-007
		L1 sleep	ATE			10	µA	DEV-CUR-PRIO1-008
		Active LS/FS mode (w/10 pF load @ USB2 and 2.5 pF load @ eUSB2)	ATE			6.5	mA	DEV-CUR-PRIO1-009
		Active HS mode (eUSB to USB direction); no de-emphasis; only RX EQ enabled on eUSB2/USB2 pins; 90 Ω termination on USB2 pins and 80 Ω on eUSB2 pins	ATE			8	mA	DEV-CUR-PRIO1-010
		Active HS mode (eUSB to USB direction) de-emphasis 3 dB on USB2; RX EQ enabled on eUSB2/USB2 pins; 85 Ω termination on USB2 side and 80 Ω termination on eUSB2 side	ATE			11	mA	DEV-CUR-PRIO1-011
		Active HS mode (USB to eUSB direction); no de-emphasis; only RX EQ enabled on eUSB2/USB2 pins; 90 Ω termination on USB2 pins and 80 Ω on eUSB2 pins	ATE			3	mA	DEV-CUR-PRIO1-037
		Active HS mode (USB to eUSB direction); de-emphasis 3 dB on USB2; RX EQ enabled on eUSB2/USB2 pins; 85 Ω termination on USB2 side and 80 Ω termination on eUSB2 side	ATE			4	mA	DEV-CUR-PRIO1-038
I _{supply,1V8}	VDD1V8 Supply current	Deep standby	ATE			50	µA	DEV-CUR-PRIO1-012
		Connect Detect substate	ATE			85	µA	DEV-CUR-PRIO1-013
		L2 suspend	ATE			85	µA	DEV-CUR-PRIO1-014
		L1 sleep	ATE			0.8	mA	DEV-CUR-PRIO1-015
		Active LS/FS mode (w/10 pF load @ USB2 and 2.5 pF load @ eUSB2)	ATE			3.7	mA	DEV-CUR-PRIO1-016
		Active HS mode (eUSB to USB direction); no de-emphasis; only RX EQ enabled on eUSB2/USB2 pins; 90 Ω termination on USB2 side and 80 Ω on eUSB2 side, 400 mV USB2 output swing	ATE			47.5	mA	DEV-CUR-PRIO1-017
		Active HS mode (eUSB to USB direction); de-emphasis 3 dB on USB2; RX EQ enabled on eUSB2/USB2 pins; 85 Ω termination on USB2 pins and 80 Ω termination on eUSB2 pins	ATE			55	mA	DEV-CUR-PRIO1-018
		Active HS mode (USB to eUSB direction); no de-emphasis; only RX EQ enabled on eUSB2/USB2 pins; 90 Ω termination on USB2 side and 80 Ω on eUSB2 side, 400 mV USB2 output swing	ATE			28	mA	DEV-CUR-PRIO1-039
		Active HS mode (USB to eUSB direction); de-emphasis 3 dB on USB2; RX EQ enabled on eUSB2/USB2 pins; 85 Ω termination on USB2 pins and 80 Ω termination on eUSB2 pins	ATE			40	mA	DEV-CUR-PRIO1-040
I _{backpower, 3V3}	Back power current when the VDD3V3 pin is shorted to GND	Current going into SCL pin when SCL is tied to VDD1V8 max	ATE			1	µA	DEV-CUR-PRIO1-019
		Current going into SDA pin when SDA is tied to VDD1V8 max	ATE			1	µA	DEV-CUR-PRIO1-020
		Current into RST_N pin when RST_N is tied to VDD1V8 max	ATE			1	µA	DEV-CUR-PRIO1-021

Table 32. Device characteristics...continued

Applicable across operating temperature and power supply ranges as mentioned under Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
I _{backpower, 1V8}	Back power current when the VDD1V8 pin is shorted to GND	Current going into SCL pin when SCL is tied to VDD1V8 max	ATE			1	μA	DEV-CUR-PRIO1-022
		Current going into SDA pin when SDA is tied to VDD1V8 max	ATE			1	μA	DEV-CUR-PRIO1-023
		Current into RST_N pin when RST_N is tied to VDD1V8 max	ATE			1	μA	DEV-CUR-PRIO1-024
I _{INRUSH_3V3}	Inrush current when VDD3V3 ramp up from 0 V to final value		Bench			1	mA	DEV-CUR-PRIO1-031
I _{INRUSH_1V8}	Inrush current when VDD1V8 ramp up from 0 V to final value		Bench			1	mA	DEV-CUR-PRIO1-032

12.2 USB2 and eUSB2 characteristics

[Table 33](#) provides details of the USB2 and eUSB2 characteristics.

Table 33. USB2 and eUSB2 characteristics

Applicable across operating temperature and power supply ranges as Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
V _{RX_CM_USB2}	USB2 RX common mode voltage		ATE	-100		500	mV	USB-VOL-PRIO1-001
V _{IH_LF_USB2}	USB2 Low/Full Speed High-level input voltage		ATE	2			V	USB-VOL-PRIO1-002
V _{IL_LF_USB2}	USB2 Low/Full Speed Low-level input voltage		ATE			0.8	V	USB-VOL-PRIO1-003
V _{IHZ_LF_USB2}	USB2 Low/Full speed hi-Z input level		ATE	2.7		3.7	V	USB-VOL-PRIO1-004
V _{OL_LF_USB2}	USB2 Low/Full speed Low-level output voltage		ATE			0.3	V	USB-VOL-PRIO1-005
V _{OH_LF_USB2}	USB2 Low/Full speed High-level output voltage		ATE	2.8		3.7	V	USB-VOL-PRIO1-006
Z _{SO_LF_USB2}	USB2 Transmit output series resistance		ATE	40.5		49.5	Ω	USB-RES-PRIO1-007
V _{OP_TX_USB2}	USB2 HS TX output signal swing	Measured on DP/DN pin with no de-emphasis with 90 Ω (nominal) differential termination; I ² C register offset address 0x08 I ² C setting = 0	ATE	315	350	385	mV	USB-VOL-PRIO1-008
		I ² C setting = 1	Char	360	400	440	mV	USB-VOL-PRIO1-009
		I ² C setting = 2	Char	405	450	495	mV	USB-VOL-PRIO1-010
		I ² C setting = 3	ATE	450	500	550	mV	USB-VOL-PRIO1-011
		I ² C setting = 4	Char	495	550	610	mV	USB-VOL-PRIO1-012
		I ² C setting = 5	Char	540	600	660	mV	USB-VOL-PRIO1-013
		I ² C setting = 6	Char	585	650	715	mV	USB-VOL-PRIO1-014
		I ² C setting = 7	ATE	630	700	770	mV	USB-VOL-PRIO1-015
G _{DE_TX_USB2}	USB2 HS TX output signal de-emphasis	Measurement on DP/DN pin @ 480 Mbit/s; with 90 Ω nominal differential termination; with 1 UI de-emphasis option; I ² C register offset address 0x07						
		I ² C setting = 1	Char	0	1	2	dB	USB-DB-PRIO1-017
		I ² C setting = 2	ATE	1	2	3	dB	USB-DB-PRIO1-018
		I ² C setting = 3	Char	2	3	4	dB	USB-DB-PRIO1-019
		I ² C setting = 4	Char	3	4	5	dB	USB-DB-PRIO1-020
		I ² C setting = 5	ATE	4	5	6	dB	USB-DB-PRIO1-021
		I ² C setting = 6	Char	5	6	7	dB	USB-DB-PRIO1-022

Table 33. USB2 and eUSB2 characteristics...continued

Applicable across operating temperature and power supply ranges as Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
t _{DE_TX_USB2}	USB2 HS TX output signal de-emphasis bit duration	Measurement on DP/DN pin @ 480 Mbit/s; with 90 Ω nominal differential termination; (UI ~2.08ns); I ² C register offset address 0x07						
		I ² C setting = 1	Char	0.3	0.5	0.7	UI	USB-TIM-PRIO1-024
		I ² C setting = 2	ATE	0.6	0.8	1	UI	USB-TIM-PRIO1-025
t _{Rise_TX_HS_USB2}	USB2 HS TX Rise/fall time	Measurement on DP/DN pin @ 480 Mbit/s (10 % to 90 % of final output level); with 90 Ω nominal differential termination and 10pF load capacitance; I ² C register offset address 0x08; I ² C setting = 0	Bench	500		900	ps	USB-TIM-PRIO1-026
		I ² C setting = 1	Bench	400		800	ps	USB-TIM-PRIO1-027
		I ² C setting = 2	Bench	300		700	ps	USB-TIM-PRIO1-028
G _{EQ_RX_USB2}	USB2 HS RX input equalization	Measurement at 240 MHz with reference to DC to 1 MHz; I ² C register offset address 0x06; I ² C setting = 0	Bench	-1	0	1	dB	USB-DB-PRIO1-029
		I ² C setting = 1	Bench	0	1	2	dB	USB-DB-PRIO1-030
		I ² C setting = 2	Bench	1	2	3	dB	USB-DB-PRIO1-031
		I ² C setting = 3	Bench	2	3	4	dB	USB-DB-PRIO1-032
		I ² C setting = 4	Bench	3	4	5	dB	USB-DB-PRIO1-033
R _{RCV_DIF_USB2}	USB2 HS RX differential receiver termination	Measured on DP/DN pin; I ² C register offset address 0x09; I ² C setting = 4	Char	72	80	88	Ω	USB-RES-PRIO1-034
		I ² C setting = 3	Char	75	85	95	Ω	USB-RES-PRIO1-035
		I ² C setting = 2	ATE	80	90	100	Ω	USB-RES-PRIO1-036
		I ² C setting = 1	Char	85	95	105	Ω	USB-RES-PRIO1-037
		I ² C setting = 0	ATE	90	100	110	Ω	USB-RES-PRIO1-038
V _{SQ_RX_USB2}	USB2 HS RX squelch detection threshold	Measured on DP/DN pin; with 90 Ω nominal differential termination; I ² C register offset address 0x06; I ² C setting = 0	ATE	25	50	75	mV	USB-VOL-PRIO1-039
		I ² C setting = 1	Char	40	65	90	mV	USB-VOL-PRIO1-040
		I ² C setting = 2	Char	60	85	110	mV	USB-VOL-PRIO1-041
		I ² C setting = 3	Char	70	95	120	mV	USB-VOL-PRIO1-042
		I ² C setting = 4	ATE	85	110	135	mV	USB-VOL-PRIO1-043
		I ² C setting = 5	ATE	100	125	150	mV	USB-VOL-PRIO1-044
		I ² C setting = 6	Char	115	140	165	mV	USB-VOL-PRIO1-045
		I ² C setting = 7	Char	130	155	180	mV	USB-VOL-PRIO1-046
V _{DIS_HS_USB2}	USB2 HS RX disconnect detection threshold	Low to High amplitude transition measured on DP/DN pin under disconnect condition; I ² C register offset address 0x0A; I ² C setting = 0	ATE	525	575	625	mV	USB-VOL-PRIO1-047
		I ² C setting = 1	Char	625	675	725	mV	USB-VOL-PRIO1-048
		I ² C setting = 2	Char	725	775	825	mV	USB-VOL-PRIO1-049
		I ² C setting = 3	ATE	825	875	925	mV	USB-VOL-PRIO1-050
V _{RISE_TX_FS_USB2}	USB2 FS TX Rise/Fall time control	Measured on DP/DN pin (10 % to 90 % of final voltage level); with 90 Ω nominal differential termination; I ² C register offset address 0x08; I ² C setting = 0	Bench	8		20	ns	USB-TIM-PRIO1-051
		I ² C setting = 1	Bench	4		10	ns	USB-TIM-PRIO1-052
t _{JITTER_USB2_HS}	Total added jitter on USB2 HS	Measured on DP/DN pin with 90 Ω nominal differential termination with BER 1e-12 reference; PRBS HS input data payload with USB2 bit stuffing; clean input signal level 75 mV;	Bench		25	40	ps	USB-TIM-PRIO1-053

Table 33. USB2 and eUSB2 characteristics...continued

Applicable across operating temperature and power supply ranges as Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
t_{JITTER_eUSB2}	Total added jitter on eUSB2 HS	Measured on eDP/eDN pin with 80 Ω nominal differential termination with BER 1e-12 reference; PRBS HS input data payload with USB2 bit stuffing; clean input signal level 100 mV;	Bench		25	40	ps	USB-TIM-PRIO1-088
$V_{RX_CM_eUSB2}$	eUSB2 HS RX DC common mode voltage range		ATE	120		280	mV	USB-VOL-PRIO1-054
$C_{RX_CM_eUSB2}$	eUSB2 HS center tapped capacitance		Bench	15		50	pF	USB-CAP-PRIO1-055
$V_{RX_DIF_SENS_eUSB2}$	eUSB2 HS RX sensitivity		Bench	25	50		+/-mV	USB-VOL-PRIO1-056
$R_{RCV_DIF_eUSB2}$	eUSB2 HS RX differential receiver termination	Measured on eDP/eDN pin;	ATE	72	80	88	Ω	USB-RES-PRIO1-057
$V_{OP_TX_eUSB2}$	eUSB2 HS TX output signal swing	Measured on eDP/eDN pin with no de-emphasis with 80 Ω (nominal) differential termination; I ² C register offset address 0x05 I ² C setting = 0	Char	140	180	220	mV	USB-VOL-PRIO1-058
		I ² C setting = 1	ATE	160	200	240	mV	USB-VOL-PRIO1-059
		I ² C setting = 2	ATE	180	220	260	mV	USB-VOL-PRIO1-060
		I ² C setting = 3	Char	200	240	280	mV	USB-VOL-PRIO1-061
$GT_X_DE_eUSB2$	eUSB2 HS TX de-emphasis as measured on eDP/eDN pin	Measurement at 240 MHz with reference to DC- 1 MHz; referenced to 200 mV (terminated) TX signaling; I ² C register offset address 0x05						
		I ² C setting = 1	Char	0	1	2	dB	USB-DB-PRIO1-063
		I ² C setting = 2	Char	1	2	3	dB	USB-DB-PRIO1-064
		I ² C setting = 3	ATE	2	3	4	dB	USB-DB-PRIO1-065
$G_{RX_EQ_eUSB2}$	eUSB2 HS RX equalization as measured on eDP/eDN pin	Measurement at 240 MHz with reference to DC- 1 MHz; I ² C register offset address 0x04 I ² C setting = 0	Bench	-1	0	1	dB	USB-DB-PRIO1-066
		I ² C setting = 1	Bench	0	1	2	dB	USB-DB-PRIO1-067
		I ² C setting = 2	Bench	1	2	3	dB	USB-DB-PRIO1-068
		I ² C setting = 3	Bench	2	3	4	dB	USB-DB-PRIO1-069
		I ² C setting = 4	Bench	3	4	5	dB	USB-DB-PRIO1-070
$V_{SQ_RX_eUSB2}$	eUSB2 HS RX squelch threshold as measured on eDP/eDN pin	Measured on eDP/eDN pin; with 80 Ω nominal differential termination; I ² C register offset address 0x04 I ² C setting = 0	Char	25	50	75	mV	USB-VOL-PRIO1-071
		I ² C setting = 1	ATE	40	65	90	mV	USB-VOL-PRIO1-072
		I ² C setting = 2	ATE	60	85	110	mV	USB-VOL-PRIO1-073
		I ² C setting = 3	Char	70	95	120	mV	USB-VOL-PRIO1-074
$V_{CM_RX_AC_eUSB2}$	eUSB2 HS RX AC common mode voltage	CM noise band (50 MHz to 480 MHz)	Bench			60	+/-mV _{peak}	USB-VOL-PRIO1-075
$V_{OL_LF_eUSB2}$	eUSB2 LS/FS Low-level output voltage	(0.15 x internally derived 1.2 V reference from VDD1V8)	ATE			0.18	V	USB-VOL-PRIO1-076
$V_{OH_LF_eUSB2}$	eUSB2 LS/FS High-level output voltage	(0.85 x internally derived 1.2 V reference from VDD1V8)	ATE	1.02			V	USB-VOL-PRIO1-077
$V_{IL_LF_eUSB2}$	eUSB2 LS/FS Low-level input voltage	(0.35 x internally derived 1.2 V reference from VDD1V8)	ATE	-0.1		0.42	V	USB-VOL-PRIO1-078
$V_{IH_LF_eUSB2}$	eUSB2 LS/FS High-level input voltage	(0.65 x internally derived 1.2 V reference from VDD1V8)	ATE	0.78			V	USB-VOL-PRIO1-079
$V_{Hysteresis_eUSB2}$	eUSB2 LS/FS RX Hysteresis	(0.04 x internally derived 1.2 V reference from VDD1V8min)	Bench	32		130	mV	USB-VOL-PRIO1-080
$Z_{TXSRC_LF_eUSB2}$	eUSB2 LS/FS Transmit output impedance		ATE	28		60	Ω	USB-RES-PRIO1-081
$V_{CM_TX_AC_USB2}$	USB2 HS TX AC common mode voltage (measured when 400 mV USB2 HS TX signaling level is	Measured spectral content from 800 MHz to 2 GHz frequency band	Bench			22	mV _{rms}	USB-VOL-PRIO1-082

Table 33. USB2 and eUSB2 characteristics...continued

Applicable across operating temperature and power supply ranges as Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
	selected and with 90 Ω termination) at USB2 pins							
V _{CM_TX_AC_RF_USB2}	USB2 HS TX AC common mode voltage at specific harmonic frequency (measured when 400 mV USB2 HS TX signaling level is selected and with 90 Ω termination) at USB2 pins; all dB level referenced to signal level at Nyquist frequency of 240 MHz	Freq = 720 MHz	Bench		-57	-49	dBV	USB-DB-PRIO1-083
		Freq = 960 MHz	Bench		-41	-35	dBV	USB-DB-PRIO1-084
		Freq = 1.2 GHz	Bench		-59	-51	dBV	USB-DB-PRIO1-085
		Freq = 1.44 GHz	Bench		-43	-38	dBV	USB-DB-PRIO1-086
t _{response}	Response time to wake up and activate redriver data path for USB2 packet transmission		Bench			4	UI	USB-TIM-PRIO1-087
V _{OVP,Th}	VBUS Over voltage detector on DP and DN pins	Low to high transition	ATE	4.2	4.4	4.9	V	USB-VOL-PRIO1-089
		High to low transition	ATE	3.9	4.2	4.9	V	USB-VOL-PRIO1-090
V _{CRS}	USB2 LS cross-over voltage		ATE	1.3	-	2	V	USB-VOL-PRIO1-103

12.3 I²C dynamic/static characteristics

Table 34 provides details of the I²C dynamic/static characteristics.

Table 34. Standard mode I²C characteristics

Applicable across operating temperature and power supply ranges as recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
f _{I2C}	I ² C clock frequency	Standard mode	ATE	0		100	kHz	STD-FRQ-PRIO1-001
R _{PULLUP}	I ² C interface pull-up resistors on SCL/SDA lines	System Requirement		0.567	2.2	2.83	k Ω	STD-RES-PRIO1-002
V _{IH}	High-level input voltage	Standard mode; 1.8 V	ATE	0.7 x VDD1V8			V	STD-VOL-PRIO1-003
V _{IL}	Low-level input voltage	Standard mode; 1.8 V	ATE	-0.3		0.3 x VDD1V8	V	STD-VOL-PRIO1-004
V _{hys}	Hysteresis of Schmitt trigger inputs	Standard mode; 1.8 V	Bench	0.05 x VDD1V8			V	STD-VOL-PRIO1-005
V _{OL}	Low-level output voltage	Standard mode, 2mA sink current; VDD1V8 < 2 V	ATE	0		0.2 x VDD1V8	V	STD-VOL-PRIO1-006
I _{OL}	Low-level output current	Standard mode, V _{OL} = 0.4 V;	ATE	3			mA	STD-CUR-PRIO1-007
I _{IL}	Low-level input current	Standard mode, Pin voltage = 0.1V _{PULLUP} to 0.9V _{PULLUP, max}	ATE	-10		10	μ A	STD-CUR-PRIO1-008
C _I	Capacitance of I/O pins	Standard mode	Bench			10	pF	STD-CAP-PRIO1-009
t _{HD,STA}	Hold time (repeated-START) condition	Standard mode	ATE	4			μ s	STD-TIM-PRIO1-010
t _{LOW}	Low period of I ² C clock	Standard mode	ATE	4.7			μ s	STD-TIM-PRIO1-011
t _{HIGH}	High period of I ² C clock	Standard mode	ATE	4			μ s	STD-TIM-PRIO1-012
t _{SU,STA}	Setup time (REPEAT) START condition	Standard mode	ATE	4.7			μ s	STD-TIM-PRIO1-013
t _{HD,DAT}	Data hold time	Standard mode	ATE	0			μ s	STD-TIM-PRIO1-014
t _{SU,DAT}	Data setup time	Standard mode	ATE	250			ns	STD-TIM-PRIO1-015
t _{SU,STO}	Setup time for STOP condition	Standard mode	ATE	4			μ s	STD-TIM-PRIO1-016
t _{BUF}	Bus free time between STOP and START condition	Standard mode	ATE	4.7			μ s	STD-TIM-PRIO1-017

Table 34. Standard mode I²C characteristics...continued

Applicable across operating temperature and power supply ranges as recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
t _r	Rise time of SCL/SDA signals	Standard mode	Bench	20		1000	ns	STD-TIM-PRIO1-018
t _f	Fall time of SCL/SDA signals	Standard mode	Bench	20 x (VDD1V8 /5.5)		300	ns	STD-TIM-PRIO1-019
t _{VD, DAT}	Data valid time	Standard mode	ATE			3.45	us	STD-TIM-PRIO1-020
t _{VD, ACK}	Data valid acknowledge time	Standard mode	ATE			3.45	us	STD-TIM-PRIO1-021
t _{SP}	Pulse width of spikes that must be suppressed by the input filter	Standard mode	ATE	0		50	ns	STD-TIM-PRIO1-022
V _{nL}	Noise margin at the LOW level	Standard mode, for each connected device (including hysteresis)	Bench	0.1 x VDD1V8			V	STD-VOL-PRIO1-023
V _{nH}	Noise margin at the HIGH level	Standard mode, for each connected device (including hysteresis)	Bench	0.2 x VDD1V8			V	STD-VOL-PRIO1-024
C _b	Capacitive load for each bus line	Standard mode, system requirement	System			400	pF	STD-CAP-PRIO1-025

Table 35. Fast mode I²C characteristics


Applicable across operating temperature and power supply ranges as mentioned in Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
f _{I2C}	I ² C clock frequency	Fast mode	ATE	0		400	kHz	FST-FRQ-PRIO1-001
R _{PULLUP}	I ² C interface pull-up resistors on SCL/SDA lines	System Requirement		0.567	2.2	2.83	kΩ	FST-RES-PRIO1-002
V _{IH}	High-level input voltage	Fast mode; 1.8 V	ATE	0.7 x VDD1V8			V	FST-VOL-PRIO1-003
V _{IL}	Low-level input voltage	Fast mode; 1.8 V	ATE	-0.3		0.3 x VDD1V8	V	FST-VOL-PRIO1-004
V _{hys}	Hysteresis of Schmitt trigger inputs	Fast mode; 1.8 V	Bench	0.05 x VDD1V8			V	FST-VOL-PRIO1-005
V _{OL}	Low-level output voltage	Fast mode, 2mA sink current; VDD1V8 < 2 V	ATE	0		0.2 x VDD1V8	V	FST-VOL-PRIO1-006
I _{OL}	Low-level output current	Fast mode, V _{OL} = 0.4 V;	ATE	3			mA	FST-CUR-PRIO1-007
I _{IL}	Low-level input current	Fast mode, Pin voltage = 0.1V _{PULLUP} to 0.9V _{PULLUP, max}	ATE	-10		10	uA	FST-CUR-PRIO1-008
C _I	Capacitance of I/O pins	Fast mode	Bench			10	pF	FST-CAP-PRIO1-009
t _{HD, STA}	Hold time (repeated-START) condition	Fast mode	ATE	0.6			us	FST-TIM-PRIO1-010
t _{LOW}	Low period of I ² C clock	Fast mode	ATE	1.3			us	FST-TIM-PRIO1-011
t _{HIGH}	High period of I ² C clock	Fast mode	ATE	0.6			us	FST-TIM-PRIO1-012
t _{SU, STA}	Setup time (REPEAT) START condition	Fast mode	ATE	0.6			us	FST-TIM-PRIO1-013
t _{HD, DAT}	Data hold time	Fast mode	ATE	0			us	FST-TIM-PRIO1-014
t _{SU, DAT}	Data setup time	Fast mode	ATE	100			ns	FST-TIM-PRIO1-015
t _{SU, STO}	Setup time for STOP condition	Fast mode	ATE	0.6			us	FST-TIM-PRIO1-016
t _{BUF}	Bus free time between STOP and START condition	Fast mode	ATE	1.3			us	FST-TIM-PRIO1-017
t _r	Rise time of SCL/SDA signals	Fast mode	Bench	20		300	ns	FST-TIM-PRIO1-018
t _f	Fall time of SCL/SDA signals	Fast mode	Bench	20 x (VDD1V8 /5.5)		300	ns	FST-TIM-PRIO1-019
t _{VD, DAT}	Data valid time	Fast mode	ATE			0.9	us	FST-TIM-PRIO1-020

Table 35. Fast mode I²C characteristics...continued

Applicable across operating temperature and power supply ranges as mentioned in Recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
$t_{VD,ACK}$	Data valid acknowledge time	Fast mode	ATE			0.9	us	FST-TIM-PRIO1-021
t_{SP}	Pulse width of spikes that must be suppressed by the input filter	Fast mode	ATE	0		50	ns	FST-TIM-PRIO1-022
V_{NL}	Noise margin at the LOW level	Fast mode, for each connected device (including hysteresis)	Bench	0.1 x VDD1V8			V	FST-VOL-PRIO1-023
V_{NH}	Noise margin at the HIGH level	Fast mode, for each connected device (including hysteresis)	Bench	0.2 x VDD1V8			V	FST-VOL-PRIO1-024
C_b	Capacitive load for each bus line	Fast mode, system requirement	System			400	pF	FST-CAP-PRIO1-025

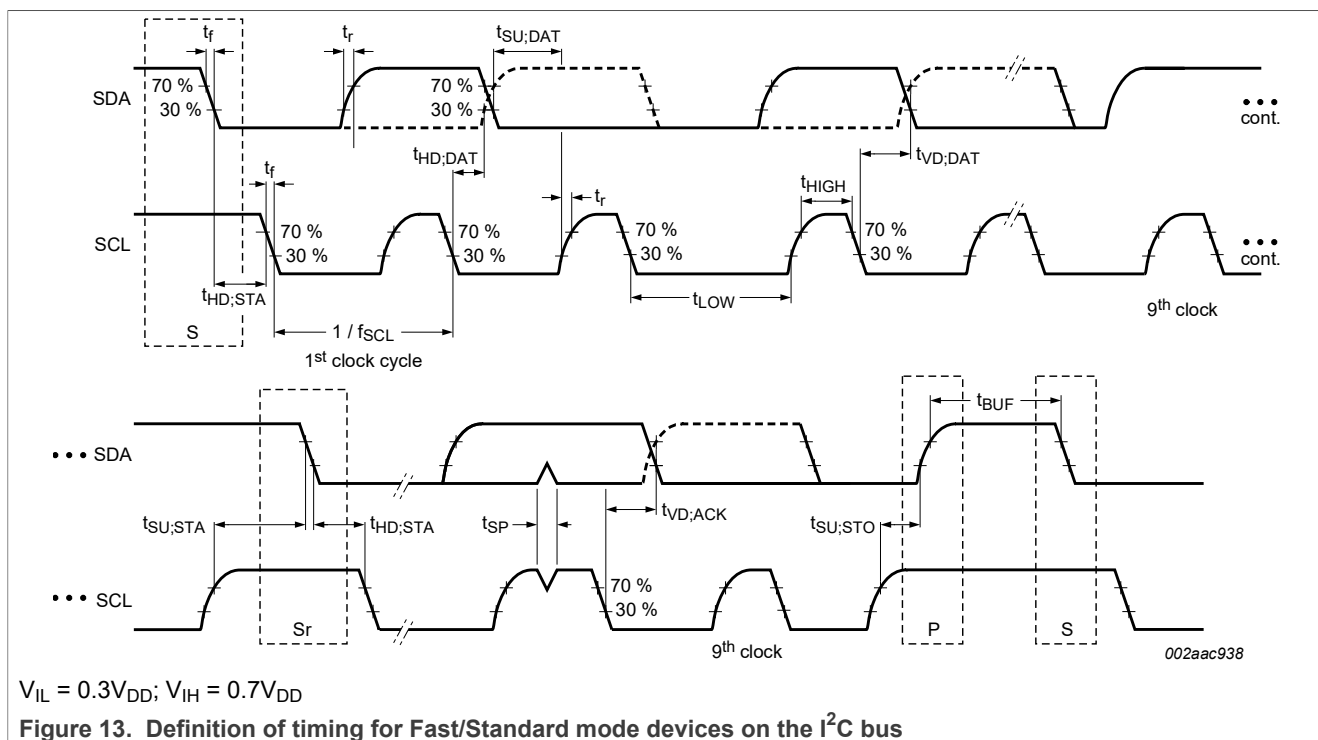**Table 36. Fast-mode Plus I²C characteristics**

Applicable across operating temperature and power supply ranges as recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
f_{I2C}	I ² C clock frequency	Fast-mode Plus	ATE	0		1000	kHz	FMPLUS-FRQ-PRIO1-001
R_{PULLUP}	I ² C interface pull-up resistors on SCL/SDA lines	System Requirement		0.567	2.2	2.83	kΩ	FMPLUS-RES-PRIO1-002
V_{IH}	High-level input voltage	Fast-mode Plus; 1.8 V	ATE	0.7 x VDD1V8			V	FMPLUS-VOL-PRIO1-003
V_{IL}	Low-level input voltage	Fast-mode Plus; 1.8 V	ATE	-0.3		0.3 x VDD1V8	V	FMPLUS-VOL-PRIO1-004
V_{hys}	Hysteresis of Schmitt trigger inputs	Fast-mode Plus; 1.8 V	Bench	0.05 x VDD1V8			V	FMPLUS-VOL-PRIO1-005

Table 36. Fast-mode Plus I²C characteristics...continued

Applicable across operating temperature and power supply ranges as recommended operating conditions unless otherwise noted. Typical values are specified at 25 °C unless otherwise noted.

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
V _{OL}	Low-level output voltage	2mA sink current; VDD1V8 < 2 V	ATE	0		0.2 x VDD1V8	V	FMPLUS-VOL-PRIO1-006
I _{OL}	Low-level output current	V _{OL} = 0.4 V; Fast-mode Plus	ATE	20			mA	FMPLUS-CUR-PRIO1-007
I _{IL}	Low-level input current	Pin voltage = 0.1V _{PULLUP} to 0.9V _{PULLUP, max}	ATE	-10		10	uA	FMPLUS-CUR-PRIO1-008
C _I	Capacitance of I/O pins		Bench			10	pF	FMPLUS-CAP-PRIO1-009
t _{HD, STA}	Hold time (repeated-START) condition	Fast-mode Plus	ATE	0.26			us	FMPLUS-TIM-PRIO1-010
t _{LOW}	Low period of I ² C clock	Fast-mode Plus	ATE	0.5			us	FMPLUS-TIM-PRIO1-011
t _{HIGH}	High period of I ² C clock	Fast-mode Plus	ATE	0.26			us	FMPLUS-TIM-PRIO1-012
t _{SU, STA}	Setup time (REPEAT) START condition	Fast-mode Plus	ATE	0.26			us	FMPLUS-TIM-PRIO1-013
t _{HD, DAT}	Data hold time		ATE	0			us	FMPLUS-TIM-PRIO1-014
t _{SU, DAT}	Data setup time	Fast-mode Plus	ATE	50			ns	FMPLUS-TIM-PRIO1-015
t _{SU, STO}	Setup time for STOP condition	Fast-mode Plus	ATE	0.26			us	FMPLUS-TIM-PRIO1-016
t _{BUF}	Bus free time between STOP and START condition	Fast-mode Plus	ATE	0.5			us	FMPLUS-TIM-PRIO1-017
t _r	Rise time of SCL/SDA signals	Fast-mode Plus	Bench	0		120	ns	FMPLUS-TIM-PRIO1-018
t _f	Fall time of SCL/SDA signals	Fast-mode Plus	Bench	20 x (VDD1V8 / 5.5)		120	ns	FMPLUS-TIM-PRIO1-019
t _{VD, DAT}	Data valid time	Fast-mode Plus	ATE			0.45	us	FMPLUS-TIM-PRIO1-020
t _{VD, ACK}	Data valid acknowledge time	Fast-mode Plus	ATE			0.45	us	FMPLUS-TIM-PRIO1-021
t _{SP}	Pulse width of spikes that must be suppressed by the input filter		ATE	0		50	ns	FMPLUS-TIM-PRIO1-022
V _{nL}	Noise margin at the LOW level	Fast-mode Plus, for each connected device (including hysteresis)	Bench	0.1 x VDD1V8			V	FMPLUS-VOL-PRIO1-023
V _{nH}	Noise margin at the HIGH level	Fast-mode Plus, for each connected device (including hysteresis)	Bench	0.2 x VDD1V8			V	FMPLUS-VOL-PRIO1-024
C _b	Capacitive load for each bus line	System Requirement				400	pF	FMPLUS-CAP-PRIO1-025

12.4 ADDR pin characteristics

[Table 37](#) provides details of the ADDR pin characteristics.

Table 37. ADDR characteristics

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
V _{IH1}	High-level input voltage	Pin connected to VDD1V8	ATE	0.9 x VDD1V8		VDD1V8+0.3	V	QAT-VOL-PRIO1-001

Table 37. ADDR characteristics...continued

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
V _{IH2}	High-level input voltage	Rext = 56 kΩ (10 % resistor) pullup to VDD1V8	ATE	0.575 x VDD1V8		0.725 x VDD1V8	V	QAT-VOL-PRIO1-009
V _{IM}	High-level input voltage	Rext = 200 kΩ (10 % resistor) pullup to VDD1V8	ATE	0.275 x VDD1V8		0.425 x VDD1V8	V	QAT-VOL-PRIO1-010
V _{IL}	Low-level input voltage	Pin connected to GND	ATE			0.1 x VDD1V8	V	QAT-VOL-PRIO1-002
I _{bckcur}	Back current on the pin when there is no power	VDD1V8=0 (no power supply to RST_N Input pad)	ATE			1	μA	QAT-CUR-PRIO1-003
I _{IL}	Pin leakage current	Pin connected directly to GND	ATE			5	μA	QAT-CUR-PRIO1-004
C _{pin}	Pin capacitance		Bench			10	pF	QAT-CAP-PRIO1-007
R _{pd}	Internal pulldown resistor		ATE	86	105	122	kΩ	QAT-RES-PRIO1-008

12.5 RST_N pin characteristics

[Table 38](#) provides details of the RST_N characteristics.

Table 38. RST_N characteristics

Symbol	Parameter	Condition	Specification guaranteed by	Min	Typ	Max	Unit	Unique identifier
V _{IH}	High-level input voltage	1.8 V IO operation	ATE	1.2			V	BIN-VOL-PRIO1-001
V _{IL}	Low-level input voltage	1.8 V IO operation	ATE			0.3	V	BIN-VOL-PRIO1-002
I _{bckcur}	Back current on the pin when there is no power	VDD1V8=0 (no power supply to RST_N Input pad)	ATE			1	uA	BIN-CUR-PRIO1-003
I _{IL}	Pin leakage current	Pin connected directly to GND	ATE			5	uA	BIN-CUR-PRIO1-004
t _{RST_N_SP}	Minimum Deglitch duration		Bench	200			ns	BIN-TIM-PRIO1-005
C _{pin}	Pin capacitance		Bench			10	pF	BIN-CAP-PRIO1-006

13 Package outline

This section shows the package outline for PTN3222HM.

13.1 SOT2074-1 (XQFN12)


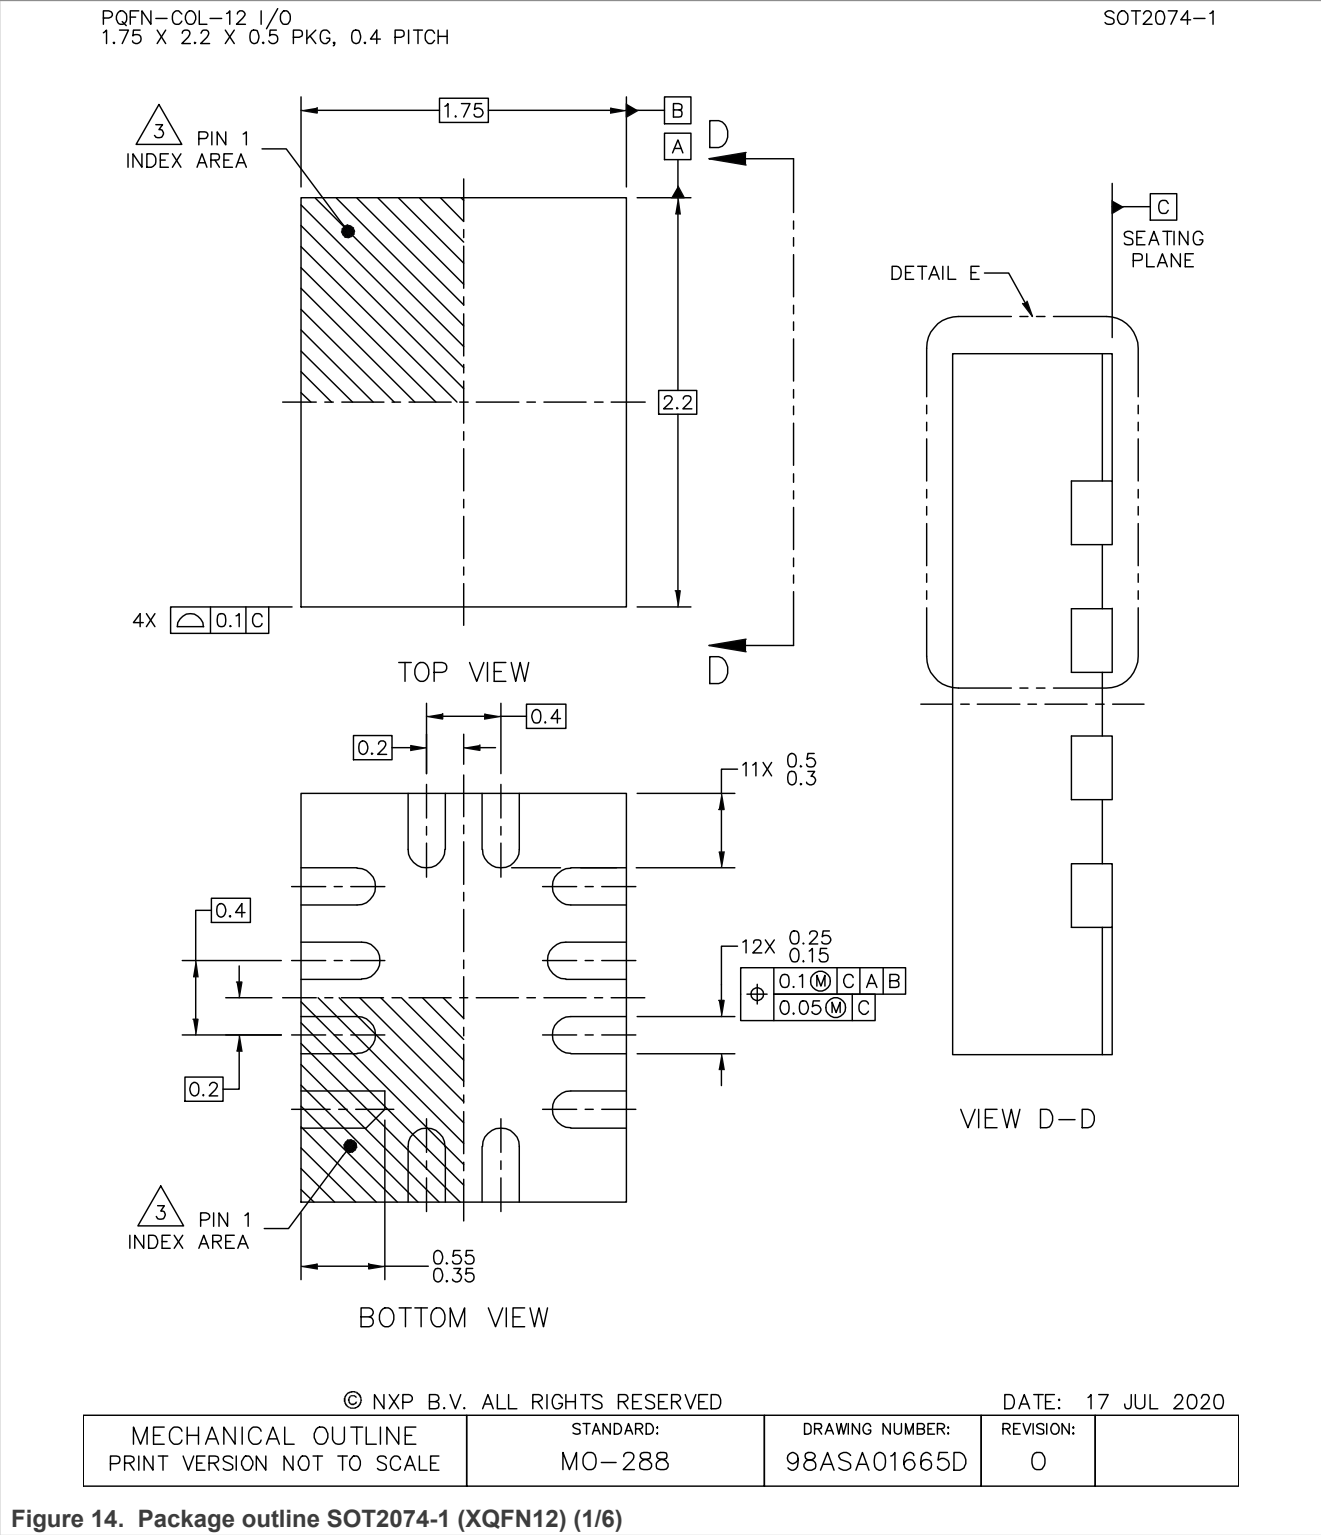


Figure 14. Package outline SOT2074-1 (XQFN12) (1/6)

PQFN-COL-12 I/O
1.75 X 2.2 X 0.5 PKG, 0.4 PITCH

SOT2074-1

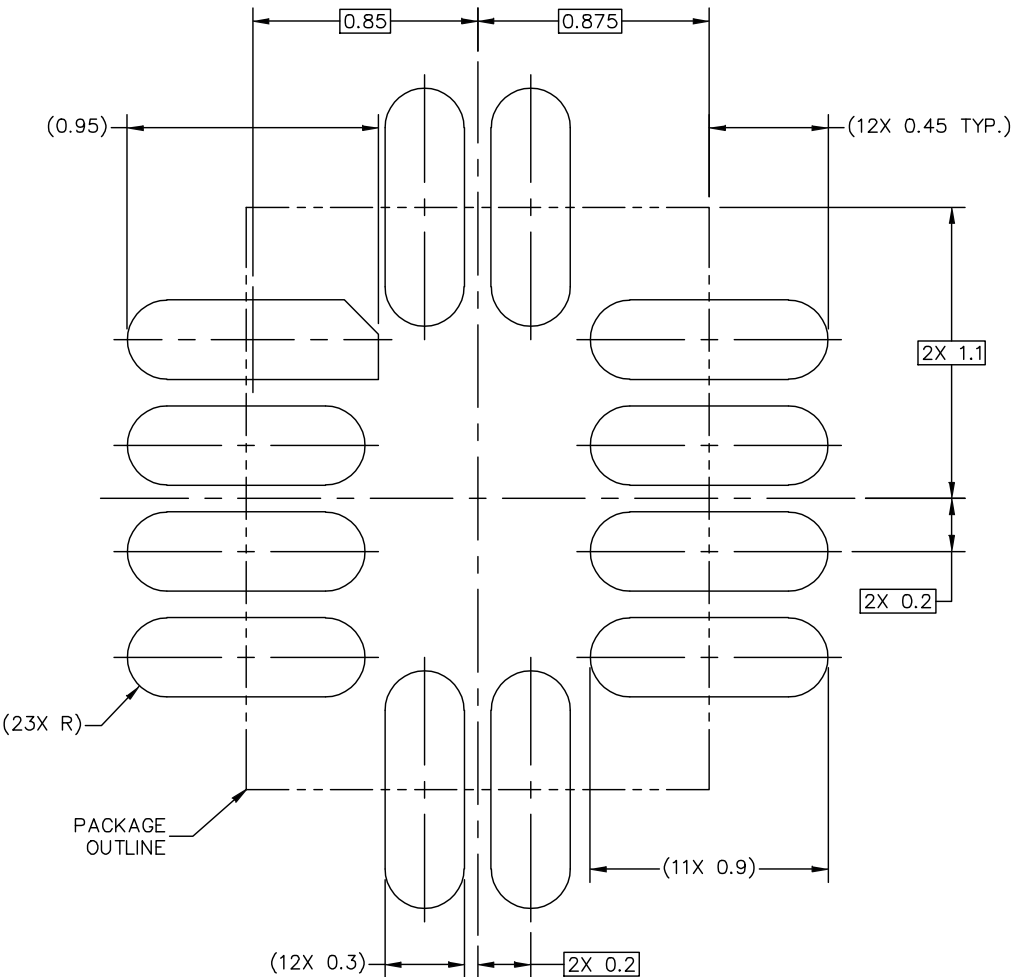

PCB DESIGN GUIDELINES – SOLDER MASK OPENING PATTERN

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION. DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.

© NXP B.V. ALL RIGHTS RESERVED


DATE: 17 JUL 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: MO-288	DRAWING NUMBER: 98ASA01665D	REVISION: 0	
--	---------------------	--------------------------------	----------------	--

Figure 15. Package outline SOT2074-1 (XQFN12) (2/6)

PQFN-COL-12 I/O
1.75 X 2.2 X 0.5 PKG, 0.4 PITCH

SOT2074-1

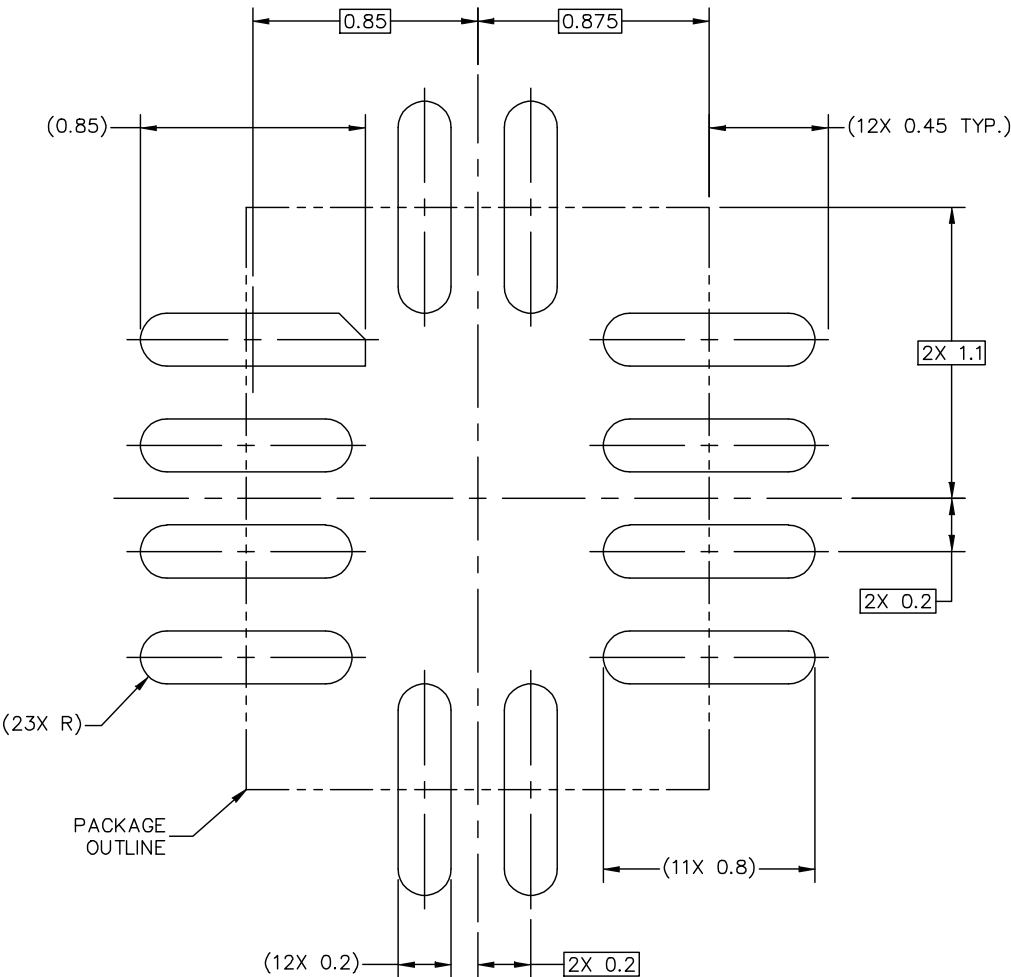

PCB DESIGN GUIDELINES – I/O PADS AND SOLDERABLE AREA

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION. DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.

© NXP B.V. ALL RIGHTS RESERVED


DATE: 17 JUL 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: MO-288	DRAWING NUMBER: 98ASA01665D	REVISION: 0	
--	---------------------	--------------------------------	----------------	--

Figure 16. Package outline SOT2074-1 (XQFN12) (3/6)

PQFN-COL-12 I/O
1.75 X 2.2 X 0.5 PKG, 0.4 PITCH

SOT2074-1

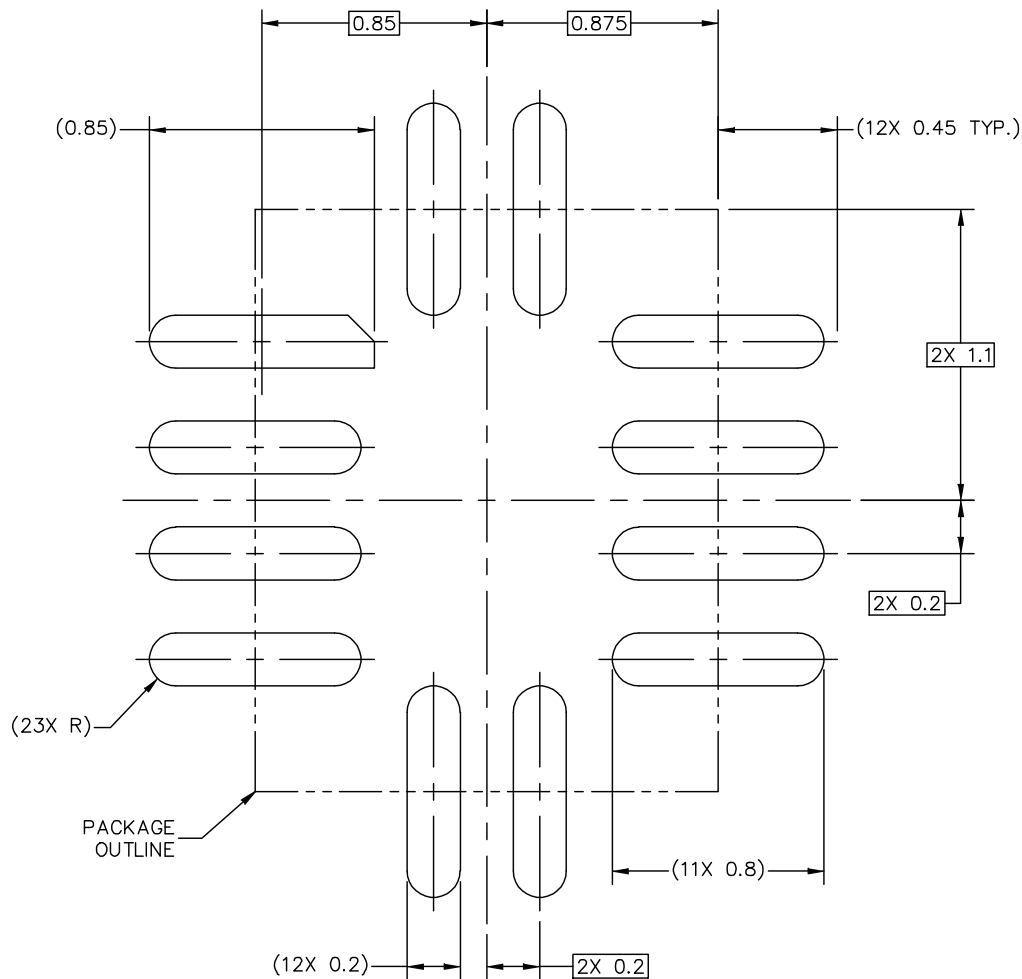

RECOMMENDED STENCIL THICKNESS 0.1

PCB DESIGN GUIDELINES – SOLDER PASTE STENCIL

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION.
DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING
PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.

© NXP B.V. ALL RIGHTS RESERVED


DATE: 17 JUL 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: MO-288	DRAWING NUMBER: 98ASA01665D	REVISION: 0	
--	---------------------	--------------------------------	----------------	--

Figure 17. Package outline SOT2074-1 (XQFN12) (4/6)

PQFN-COL-12 I/O
1.75 X 2.2 X 0.5 PKG, 0.4 PITCH

SOT2074-1

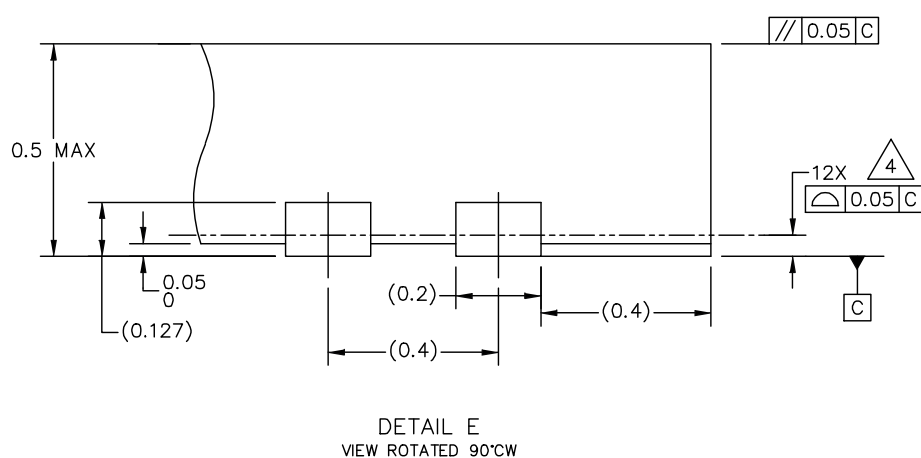

© NXP B.V. ALL RIGHTS RESERVED

DATE: 17 JUL 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: MO-288	DRAWING NUMBER: 98ASA01665D	REVISION: 0
--	---------------------	--------------------------------	----------------

Figure 18. Package outline SOT2074-1 (XQFN12) (5/6)

PQFN-COL-12 I/O
1.75 X 2.2 X 0.5 PKG, 0.4 PITCH

SOT2074-1

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
- 3. PIN 1 FEATURE SHAPE, SIZE AND LOCATION MAY VARY.
- 4. COPLANARITY APPLIES TO LEADS.
- 5. MIN. METAL GAP SHOULD BE 0.15 MM.

© NXP B.V. ALL RIGHTS RESERVED

DATE: 17 JUL 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: MO-288	DRAWING NUMBER: 98ASA01665D	REVISION: 0	
--	---------------------	--------------------------------	----------------	--

Figure 19. Package outline SOT2074-1 (XQFN12) (6/6)

14 Packing information

This section details the product dimensions, orientation, and carrier tape specifications.

14.1 SOT2074-1 XQFN12 ; Reel NDP, SMD, 13" Q1 standard product orientation
Ordering code (12NC) ending 118


14.1.1 Dimensions and quantities

Table 39. Dimension and quantities

Reel dimensions d x w (mm) ^[1]	SPQ/PQ (pcs)	Reels per box
330 x 8	18000	1

[1] d = reel diameter; w = tape width

14.1.2 Product orientation



Pin 1 is in quadrant 1.

Figure 20. Product orientation in carrier tape

14.1.3 Carrier tape dimensions

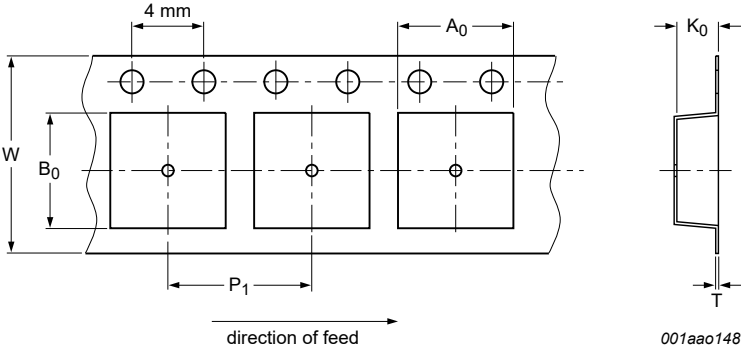


Figure 21. Carrier tape dimensions

15 Acronyms

[Table 40](#) lists acronyms used in this document.

Table 40. Acronyms

Acronym	Description
AFE	Analog front-end
CDM	Charged device model
CM	Control message
CMF	Common-mode filter
DRD	Dual role device
DSP	Downstream port
EOP	End of packet
EQ	Equalization
ESE1	Extended SE1
ESD	Electrostatic discharge
eUSB	Embedded USB
FS	Full speed mode of USB2 specification (12 Mbit/s)
HBM	Human body model
HS	High-speed mode of USB2 specification (480 Mbit/s)
IC	Integrated circuit
LPM	Link power management
LS	Low-speed mode of USB2 specification (1.5 Mbit/s)
PCB	Printed-circuit board
POR	Power-on reset
RAP	Register access protocol
RX	Receiver
SCM	Start of control message
SE	Single ended
SE0	Single ended zero
SE1	Single ended one
SI	Signal integrity
SOC	System on a chip
SOP	Start of packet
TX	Transmitter
USP	Upstream port

16 References

This section lists the references used to supplement this document.

- | | | | |
|-----|---|---|--|
| [1] | UM10204 | — | I ² C-bus specification and user manual, NXP Semiconductors |
| [2] | USB-IF organization document repository for eUSB2 specification | — | Embedded USB2 Physical Layer Supplement to USB Revision 2.0 specification, Revision 1.1, November 3, 2018 |
| [3] | USB-IF organization document repository for USB2 specification | — | Universal Serial Bus Specification, Rev 2.0, April 27, 2000 and approved ECNs as per USB2.0 document package release (usb_20_20190524.zip) |
| [4] | USB BC1.2 specification | — | USB Battery Charging (BC1.2) specification from USB-IF |
| [5] | AN13637 | — | PTN3222BUK Application note for handling abnormal pulses at the end of EOP, 2022 |
| [6] | AN13462 | — | PTN3222 Layout guidelines, 2022 |

17 Revision history

[Table 41](#) summarizes revisions to this document.

Revision history

Document ID	Release Date	Description
PTN3222HM v1.0	16 October 2025	Initial public release

Legal information

Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <https://www.nxp.com>.

Definitions

Draft — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Suitability for use in non-automotive qualified products — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

HTML publications — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately.

Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at PSIRT@nxp.com) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. — NXP B.V. is not an operating company and it does not distribute or sell products.

Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

NXP — wordmark and logo are trademarks of NXP B.V.

I2C-bus — logo is a trademark of NXP B.V.

Contents

1	General description	2
2	Features and benefits	2
3	Applications	3
4	Ordering information	3
4.1	Ordering options	3
4.2	Top side marking	3
5	Functional diagram	3
6	Pinning information	5
6.1	Pinning	5
6.2	Pin description	5
7	Functional description	6
7.1	Reset	6
7.2	Operating modes	6
7.3	eUSB2 repeater	7
7.3.1	Overvoltage protection on USB2 DP/DN pins	8
7.4	BC1.2 support	8
7.5	I2C operation	8
7.5.1	I2C target address	9
7.5.2	Example of writing one or more registers	9
7.5.3	Example of reading one or more registers	10
8	System application	10
8.1	Use cases	10
8.2	Power supply requirement	12
8.3	Ground requirement	12
8.4	ESD requirements	13
8.5	Application support	13
9	Register set	13
9.1	Register overview	14
9.2	I2C registers and descriptions	14
9.2.1	Functional registers	14
10	Limiting values	26
11	Recommended operating conditions	26
12	Characteristics	27
12.1	Device characteristics	27
12.2	USB2 and eUSB2 characteristics	29
12.3	I2C dynamic/static characteristics	32
12.4	ADDR pin characteristics	35
12.5	RST_N pin characteristics	36
13	Package outline	36
13.1	SOT2074-1 (XQFN12)	37
14	Packing information	43
14.1	SOT2074-1 XQFN12 ; Reel NDP, SMD, 13" Q1 standard product orientation Ordering code (12NC) ending 118	43
14.1.1	Dimensions and quantities	43
14.1.2	Product orientation	43
14.1.3	Carrier tape dimensions	43
15	Acronyms	44
16	References	45
17	Revision history	46
	Legal information	47

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.