

UG10083

NTAG X DNA – Quick start guide with product support package

Rev. 1.3 — 10 November 2025

User guide

Document information

Information	Content
Keywords	NTAG X DNA
Abstract	This document is the entry point for getting familiar with NTAG X DNA support package contents and how to get started with evaluating and development.



1 About NTAG X DNA

The NTAG X DNA product is a secure authenticator IC with contactless, contact interface and has two additional GPIOs. The target use case is the Device authentication (online or offline) with rich NFC Forum experience. It supports both Symmetric (AES) and Asymmetric crypto functions – SHA, AES, ECDH, and ECDSA. The Common Criteria security certification ensures that the IC security measures and protection mechanisms have been evaluated against sophisticated noninvasive and invasive attack scenarios. On top, it supports contactless Silent mode (not discoverable by ISO14443 reader, for example, POS terminal) and enhanced privacy options (untraceability). It allows a low-power design, and consumes only ~5 μ A at Deep-Power-Down mode when an external VDD is supplied.

For more details on all features, refer to the data sheet [ref.\[1\]](#).

Delivered as a ready-to-use solution, the NTAG X DNA has a complete product support package that simplifies design-in and reduces time to market. The NTAG X DNA support package offers:

- Software enablement for different MCUs and MPUs
- Integration and build environment for common operating systems including Linux, Windows
- Example code for major IoT use cases
- Personalization scripts
- Extensive application notes
- Development kits compatible with Kinetis® MCU boards

The NTAG X DNA support package encapsulates the needed tools to evaluate, prototype and implement final NTAG X DNA NFC, IoT or other applications.

2 Hardware

2.1 Evaluation board - NTAG-X-DNA-EVAL



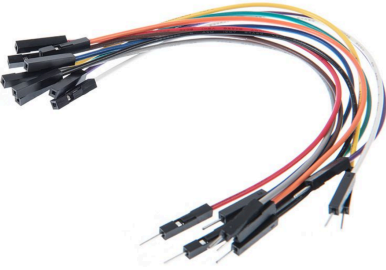
The NTAG X DNA product is supported with a development board that can be connected with any MCU or MPU board through direct I²C connection. [Table 1](#) summarizes the ordering details of the NTAG X DNA development board.

NTAG X DNA is designed for battery-operated applications and for MCUs and MPUs with a supply voltage of 1.8 V. Therefore, the operating supply voltage range of NTAG X DNA is specified from 1.0 V to 2.0 V.

Some MCU families are supporting an operating voltage of 1.8 V, but many of the MCU and MPU demo boards are designed for a supply voltage of 3.3 V or even 5.0 V. To support rapid prototyping, the NTAG-X-DNA-EVAL includes a level shifter which translates the voltage level accordingly.

More details about the NTAG-X-DNA-EVAL and ordering information can be found on [ref.\[2\]](#)

Table 1. Development kit NTAG-X-DNA-EVAL

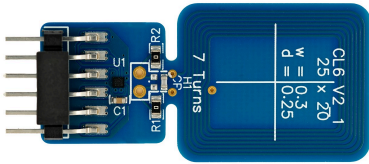12NC	Quantity	Description	Image
935505096598	3	NTAG X DNA evaluation board	 Figure 1. NTAG X DNA evaluation board
	1	Level shifter from 3.3 V to 1.8 V	 Figure 2. Level shifter
	6	Connecting wires male to female	 Figure 3. Connecting wires male to female

2.1.1 Pinout


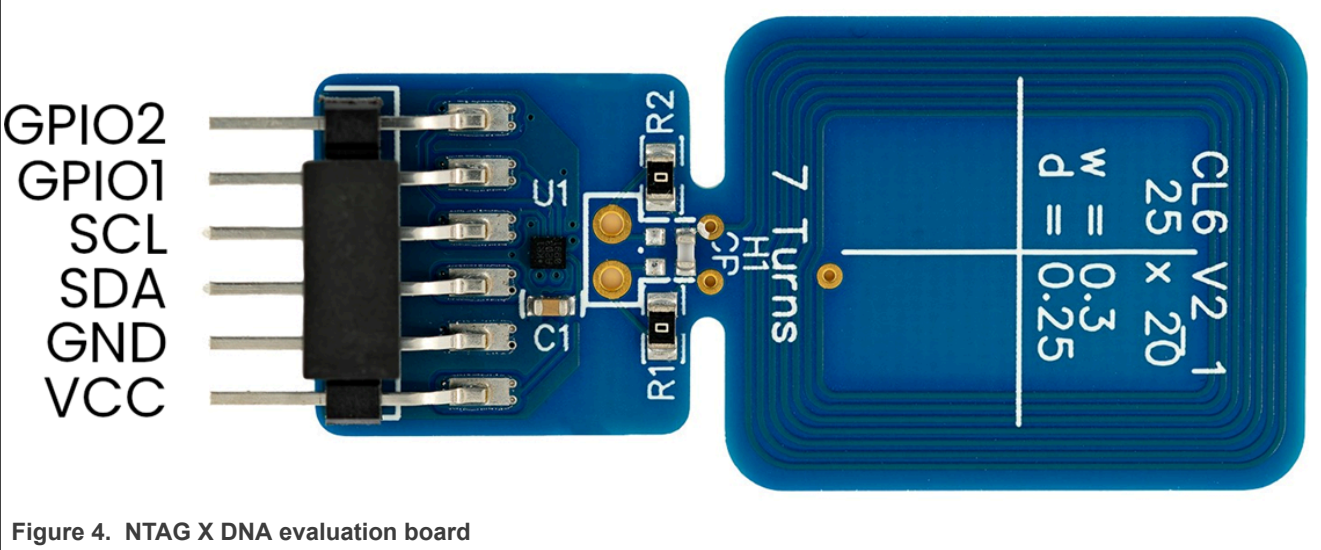


Figure 4. NTAG X DNA evaluation board

Note: Operating supply voltage range of NTAG X DNA is specified from 1.0 V to 2.0 V. Use enclosed level shifter for higher supply voltages (e.g. to use with MCU development boards).

Table 2.

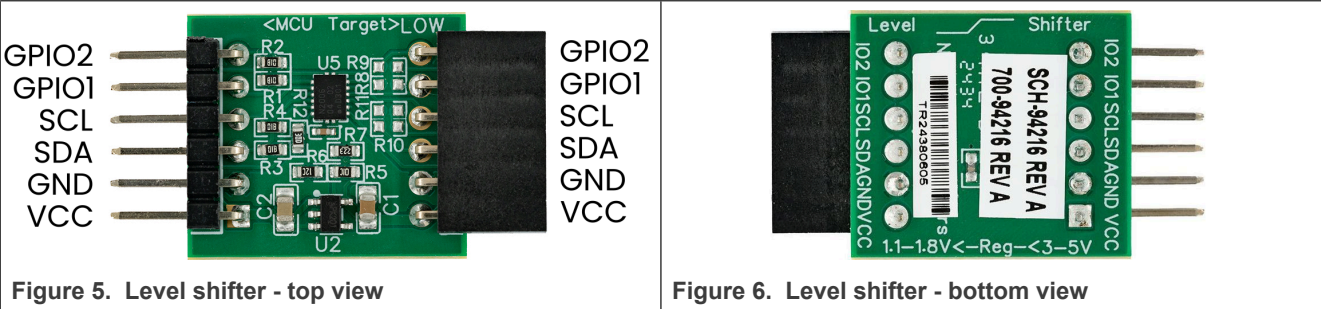

2.1.2 Connection


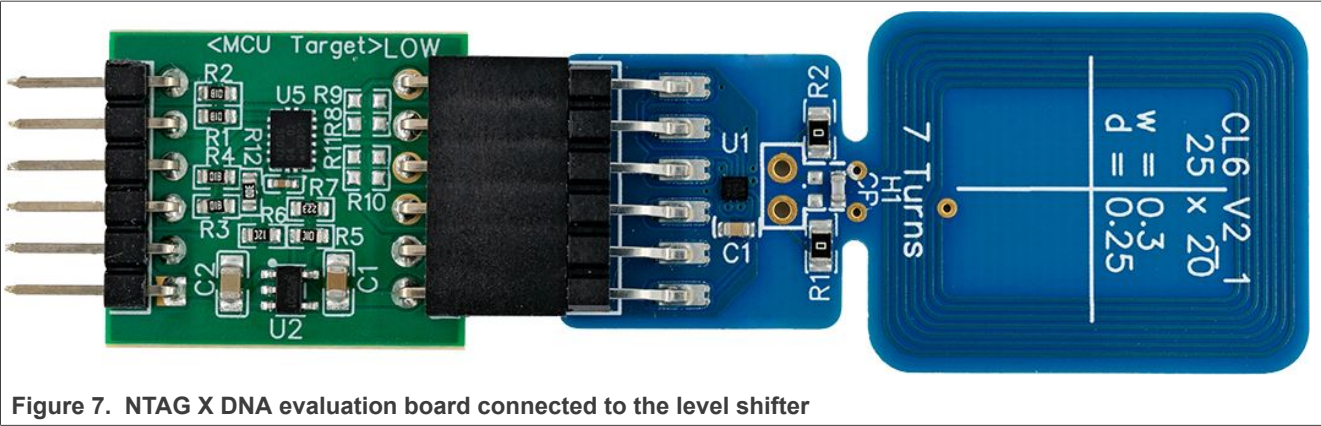



Figure 7. NTAG X DNA evaluation board connected to the level shifter

2.1.3 Schematics

2.1.3.1 NTAG X DNA evaluation board

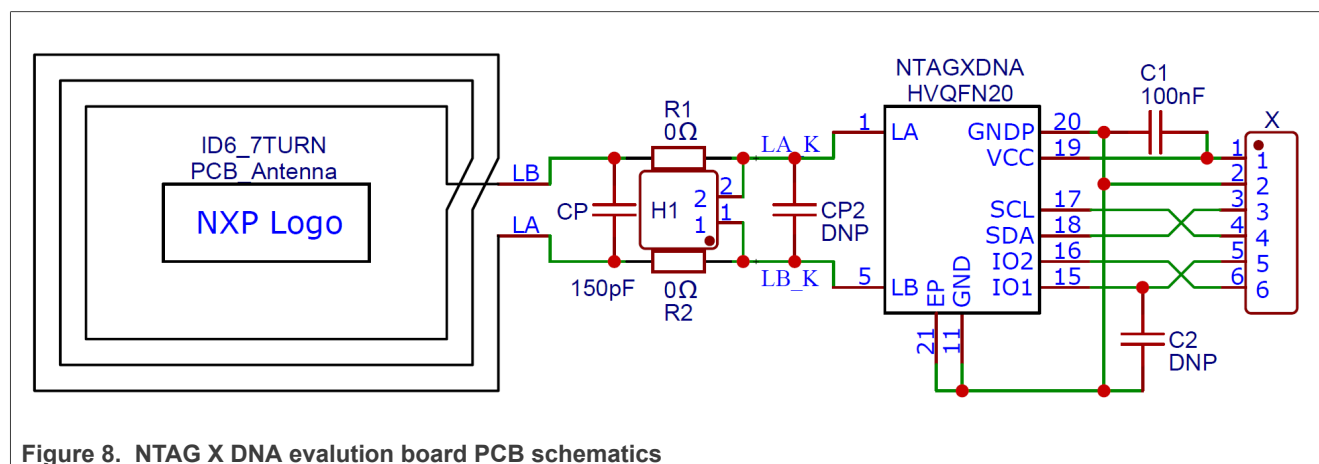

2.1.3.2 Level shifter board

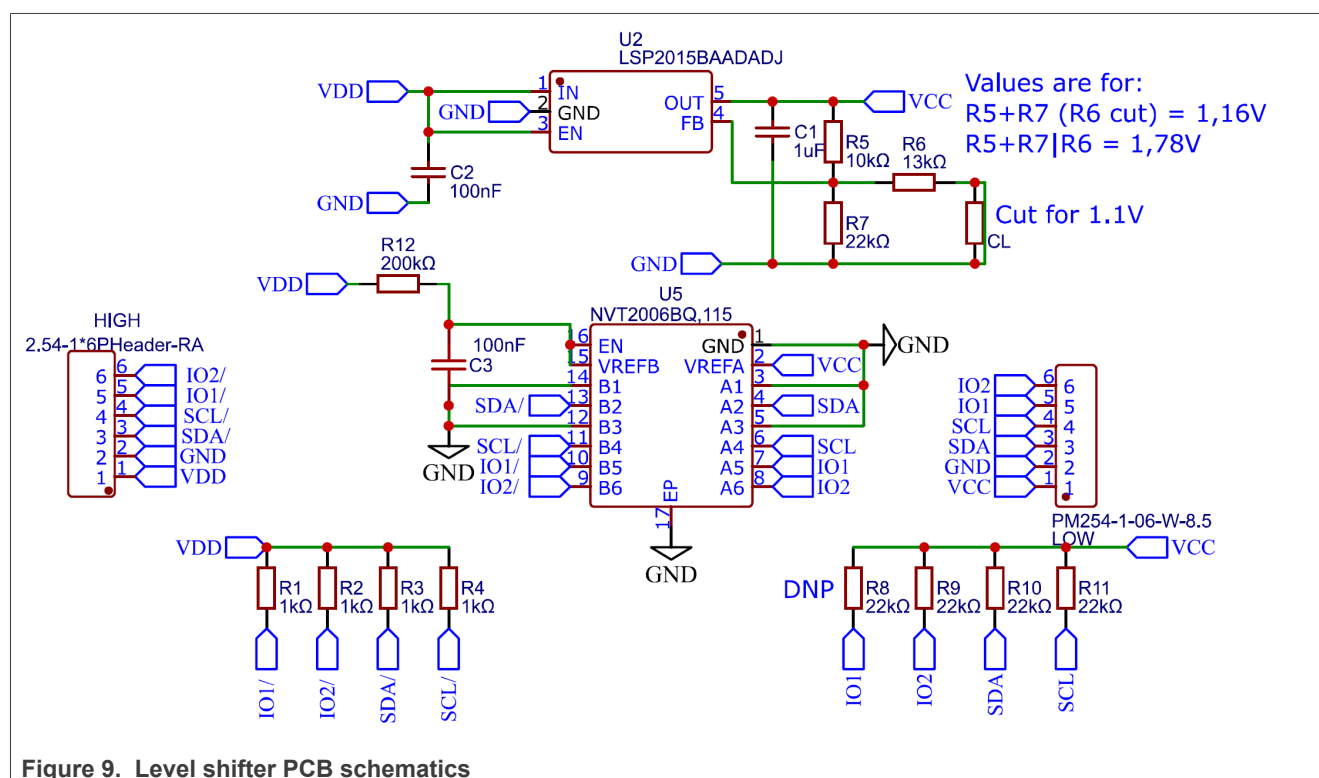

2.1.4 Radio Equipment Directive (RED)

The following information is provided per Article 10.8 of the Radio Equipment Directive 2014/53/EU:

- (a) Frequency bands in which the equipment operates.
- (b) The maximum radio-frequency power transmitted in the frequency band(s) in which the radio equipment operates.

Table 3. Characteristics

PN	RF Technology	(a) Frequency Range (EU)	(b) Max Transmitted Power
NTAG-X-DNA-EVAL	ISO/IEC 14443-4A (Passive)	10 MHz to 15 MHz	0 dBm

EUROPEAN DECLARATION OF CONFORMITY (Simplified DoC per Article 10.9 of the Radio Equipment Directive 2014/53/EU)

This apparatus, namely NTAG-X-DNA-EVAL board for contactless operation, conforms to Radio Equipment directive 2014/53/EU.

The full EU Declaration of conformity for all apparatus can (will) be found at this location: www.nxp.com/ntagxdna

2.2 Development environment

2.2.1 I²C interfaces - MCU and MPU boards

The NTAG X DNA IC is designed to be used as a part of an IoT system. It can be interfaced from the NFC or I²C side. It works as an auxiliary security device, which can be physically connected to a host controller. The host controller communicates with NTAG X DNA through the I²C interface. Host controller being as the I²C controller and the NTAG X DNA being as the I²C target.

[Table 4](#) summarizes the ordering details of the MCU / MPU boards supported by the NTAG X DNA Middleware:

Table 4. MCU/MPU boards supported by NX Middleware

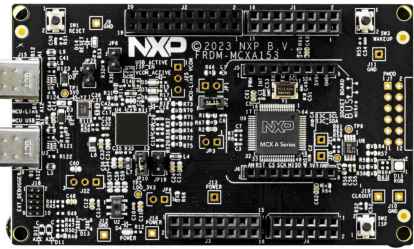
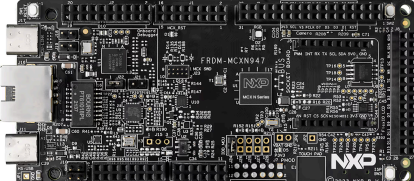
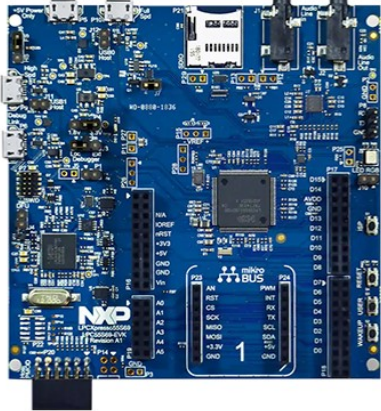
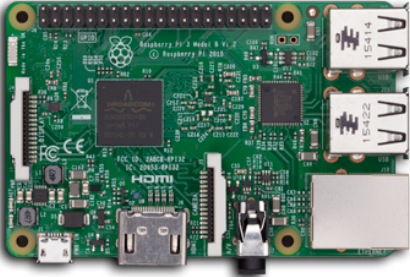
Link	Description	Image
FRDM-MCXA153	FRDM-MCXA153 are compact and scalable development boards for rapid prototyping of MCX A14 and A15 MCUs	 Figure 10. FRDM-MCXA153
FRDM-MCXN947	FRDM-MCXN947 are compact and scalable development boards for rapid prototyping of MCX N94 and N54 MCUs	 Figure 11. FRDM-MCXN947
LPC55S69-EVK	LPCXpresso55S69 Development Board	 Figure 12. LPCXpresso55S69 Development Board

Table 4. MCU/MPU boards supported by NX Middleware...continued

Link	Description	Image
Raspberry Pi	Raspberry Pi 3 development board	<div><p>Figure 13. Raspberry Pi 3 development board</p></div>

2.2.1.1 NTAG-X-DNA-EVAL connection to FRDM-MCXA153 development board

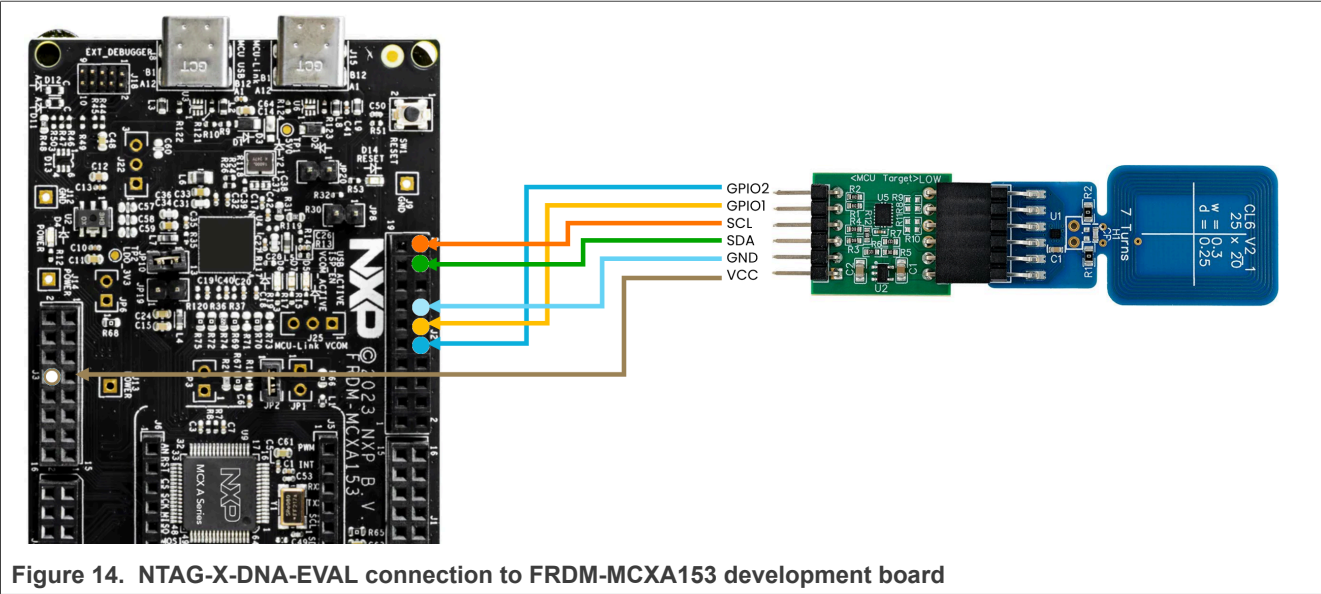


Table 5. Connections to FRDM-MCXA153 development board

NTAG-X-DNA-EVAL pin	FRDM-MCXA153 development board pin
IO2	J2 → 10 (PTD5)
IO1	J2 → 12 (PTD7)
SCL	J2 → 20 (PTE1)
SDA	J2 → 18 (PTE0)
GND	J2 → 14 (GND) or J3 → 12, 14 (GND)
VCC	J3 → 8 (+3V3) or 10 (+5V)

2.2.1.2 NTAG-X-DNA-EVAL connection to FRDM-MCXN947 development board

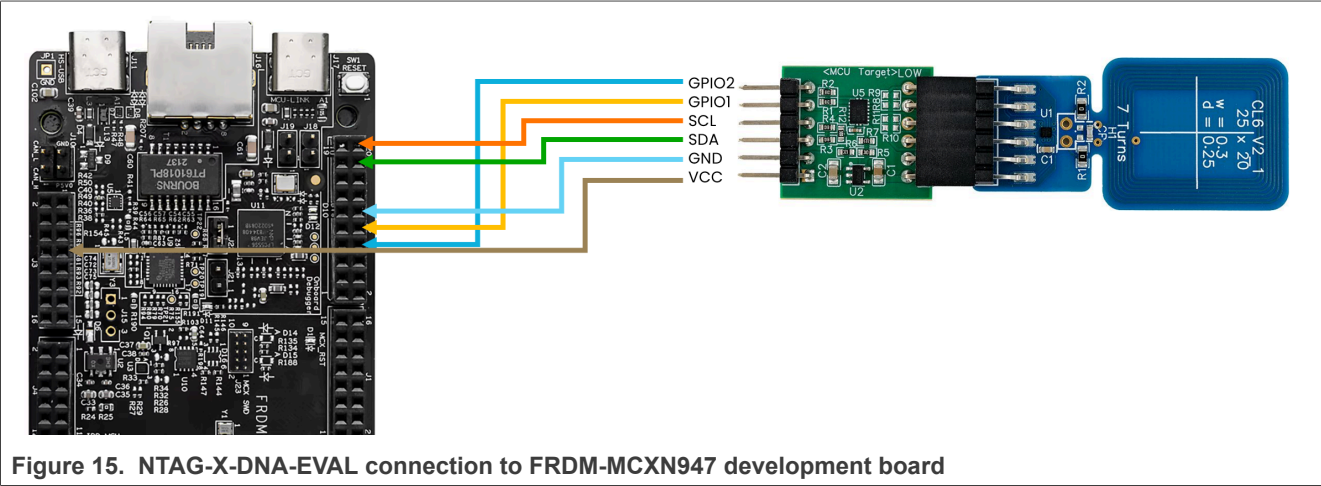


Table 6. Connections to FRDM-MCXN947 development board

NTAG-X-DNA-EVAL pin	FRDM-MCXN947 development board pin
IO2	J2 → 10 (P0_26)
IO1	J2 → 12 (P0_25)
SCL	J2 → 20 (P4_1)
SDA	J2 → 18 (P4_0)
GND	J2 → 14 (GND) or J3 → 12, 14 (GND)
VCC	J3 → 8 (+3V3) or 10 (+5V)

2.2.1.3 NTAG-X-DNA-EVAL connection to LPC55 development board

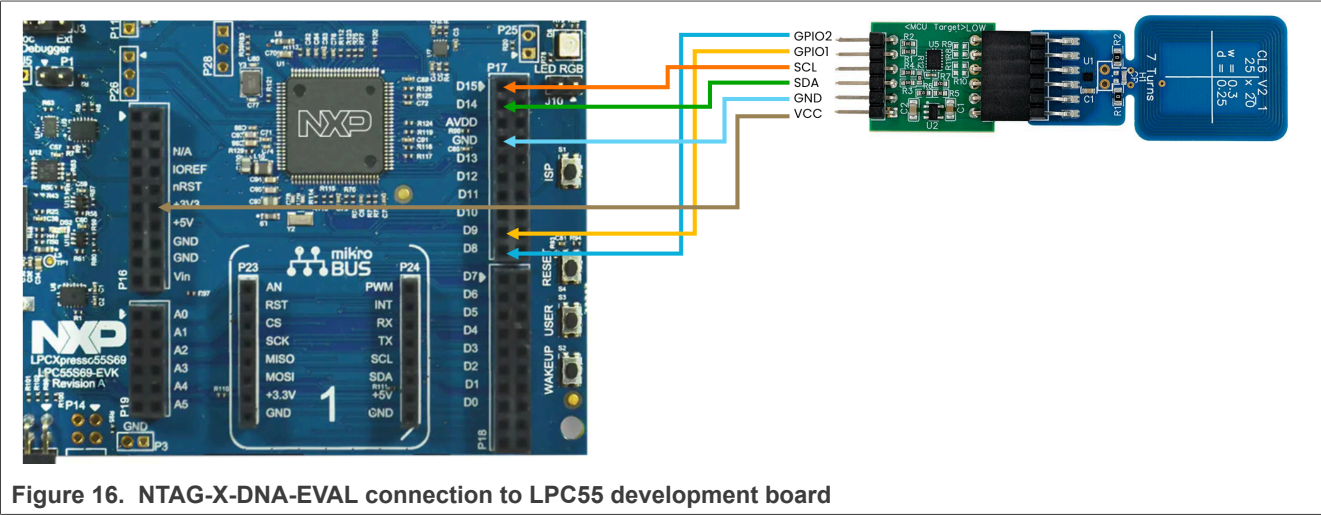


Figure 16. NTAG-X-DNA-EVAL connection to LPC55 development board

Table 7. Connections to LPC55 development board

NTAG-X-DNA-EVAL pin	LPC55 development board pin
IO2	P17 → D8
IO1	P17 → D9
SCL	P17 → D15
SDA	P17 → D14
GND	P16 → 16 (GND) or 18 (GND) / P17 → 7 (GND)
VCC	P16 → 12 (+3V3) or 14 (+5V)

2.2.1.4 NTAG-X-DNA-EVAL connection to RaspberryPi board

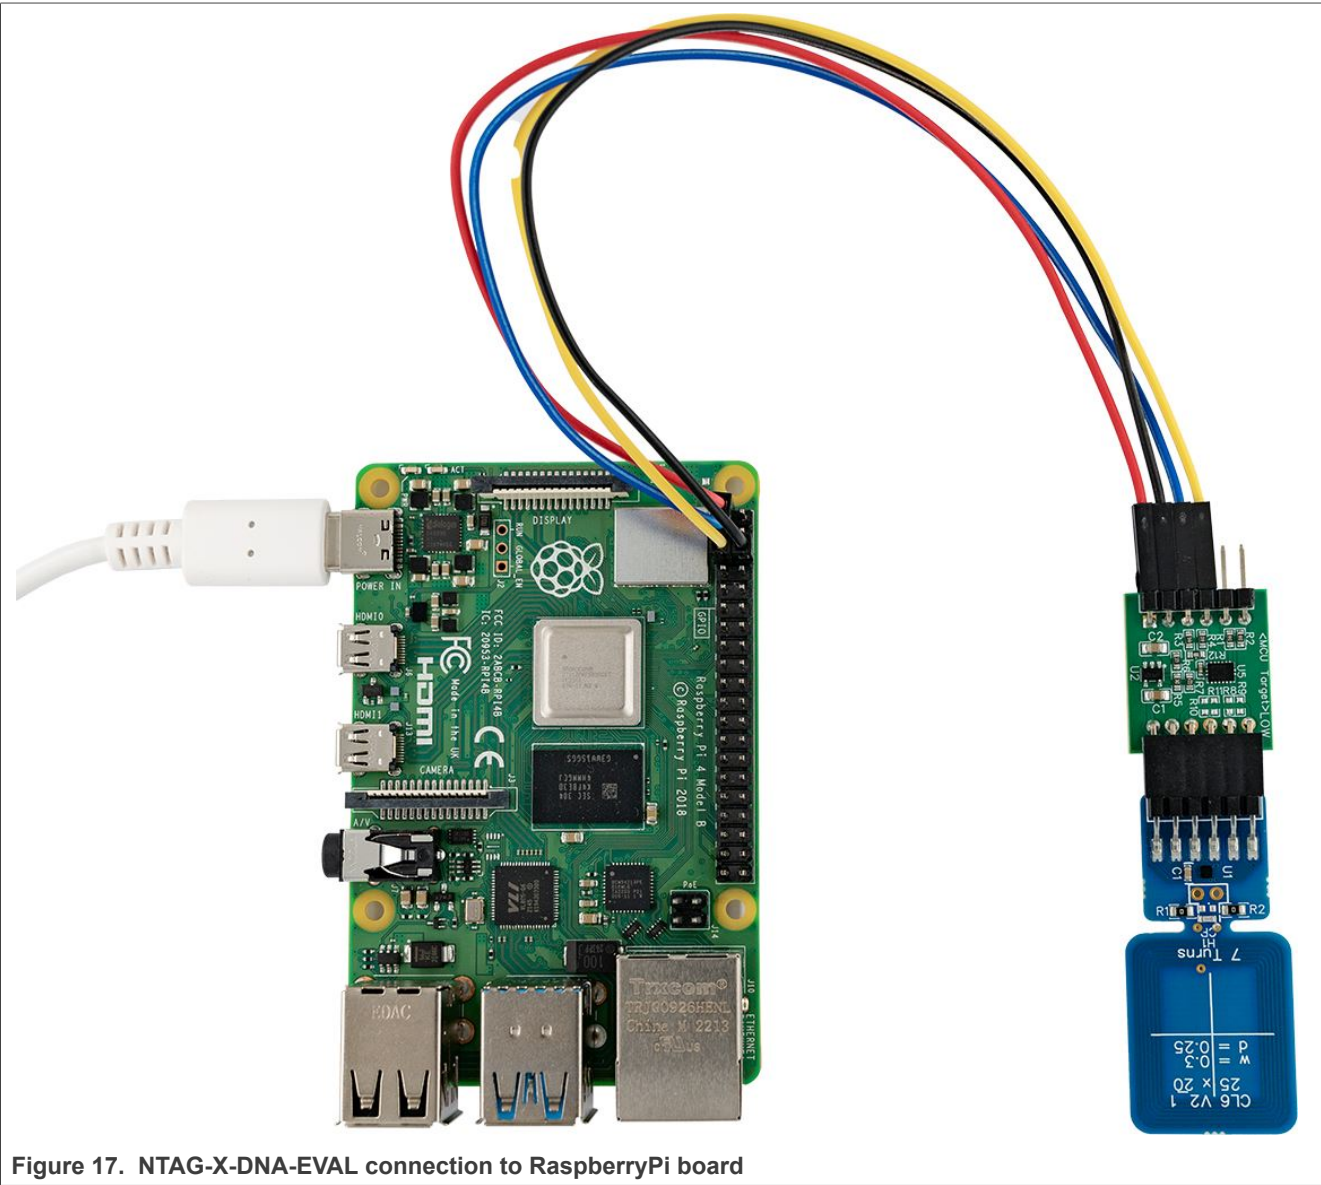


Table 8. Connections to RaspberryPi development board

NTAG-X-DNA-EVAL pin	RaspberryPi development board pin
IO2	Pin10 (GPIO15)
IO1	Pin8 (GPIO14)
SCL	Pin5 (GPIO 3 (SCL))
SDA	Pin3 (GPIO 2 (SDA))
GND	Pin6 (Ground)
VCC	Pin1 (3V3 power)

2.2.2 NFC interfaces

For the NFC interface, a PC/SC compliant reader (NTAG X DNA Middleware support), recent NXP NFC reader development board or Pegoda 3 desktop reader can be used.

Table 9. Supporting NFC devices

Part number	12NC	Description	Supporting software
Pegoda ref.[8]	935443122596	NXP PN7642 based desktop reader	<ul style="list-style-type: none">• RFIDDiscover• Card Test Framework• NxpRdLib (C# .NET lib)
PC/SC reader	Any PC/SC reader	PC/SC interface reader	<ul style="list-style-type: none">• NTAG X DNA Middleware (through CMAKE build option)• RFIDDiscover
NFC mobile	Any NFC mobile	-	<ul style="list-style-type: none">• TagWriter• TagInfo


3 Software

3.1 NTAG X DNA Middleware

3.1.1 Multiplatform NTAG X DNA Middleware

The NTAG X DNA Middleware is a single software stack designed to facilitate the integration of NXP security ICs into your PC Host, microcontroller, or microprocessor software. This Middleware has built-in cryptography and device identity features, abstracts of the commands and communication interface exposed by NXP security ICs. It is directly accessible from stacks like OpenSSL, mbedTLS, or other cryptographic libraries. It includes code examples for quick integration of features and uses cases, such as SIGMA-I, ECDSA, or AES authentication. It comes with support for various NXP MCU/MPU platforms, NFC readers and can be ported to multiple host platforms and host operating systems.

Figure 18 is a simplified representation of the layers and components of NTAG X DNA Middleware:

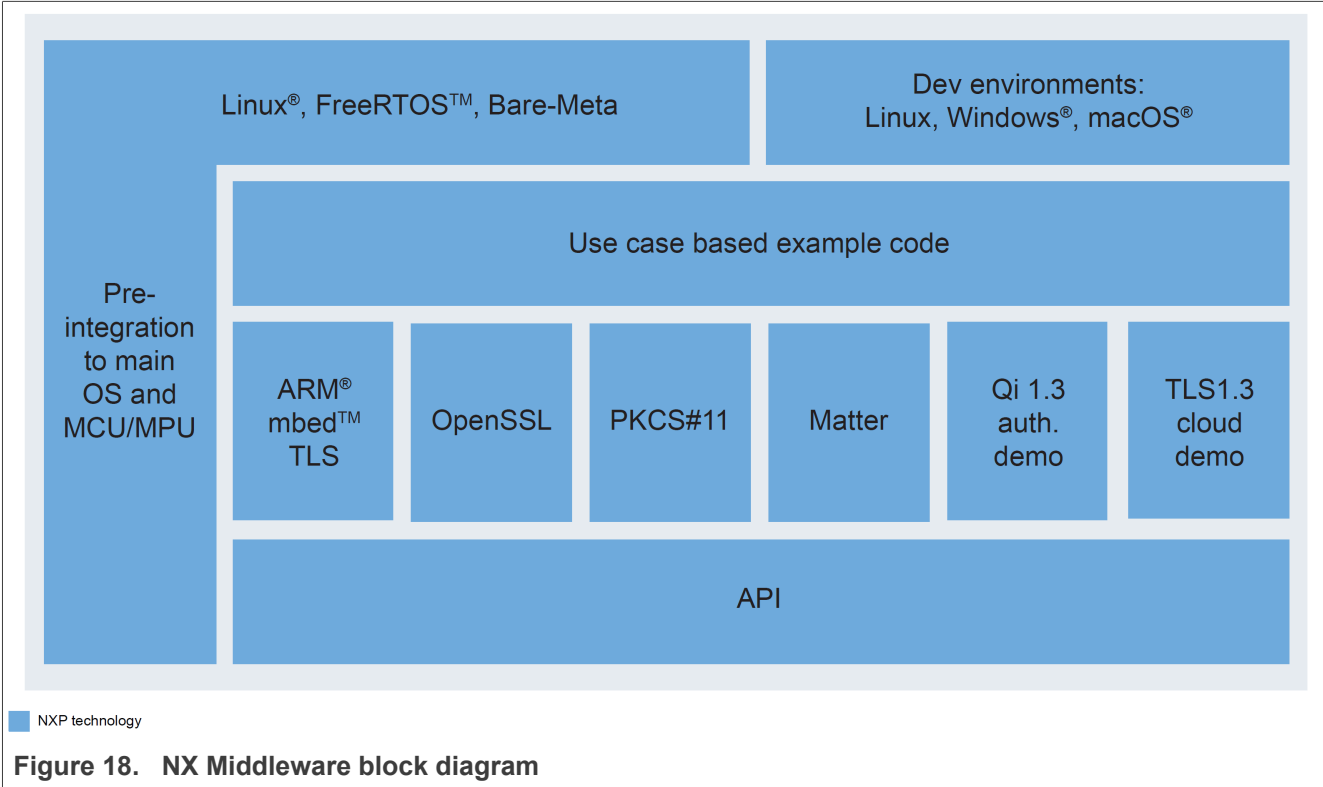

3.1.1.1 NTAG X DNA Middleware availability

The latest NTAG X DNA Middleware version can be found in the GitHub repository: <https://github.com/NXP/nxmw>.

3.1.1.2 Building and compiling the NTAG X DNA Middleware

The NTAG X DNA Middleware is delivered with CMake files that include a set of directives and instructions describing the project's source files and targets. The CMake files allow developers to build NTAG X DNA Middleware for their target platform, enable or disable features, or to change setting flags etc. The CMake-

based compilation option is provided as a convenient way for developers to run a project example on different target platforms, for example, Windows, Linux PCs, or embedded platforms.

The project settings can be specified dynamically using the CMake GUI. [Figure 19](#) shows a CMake GUI screenshot with NTAG X DNA project settings.

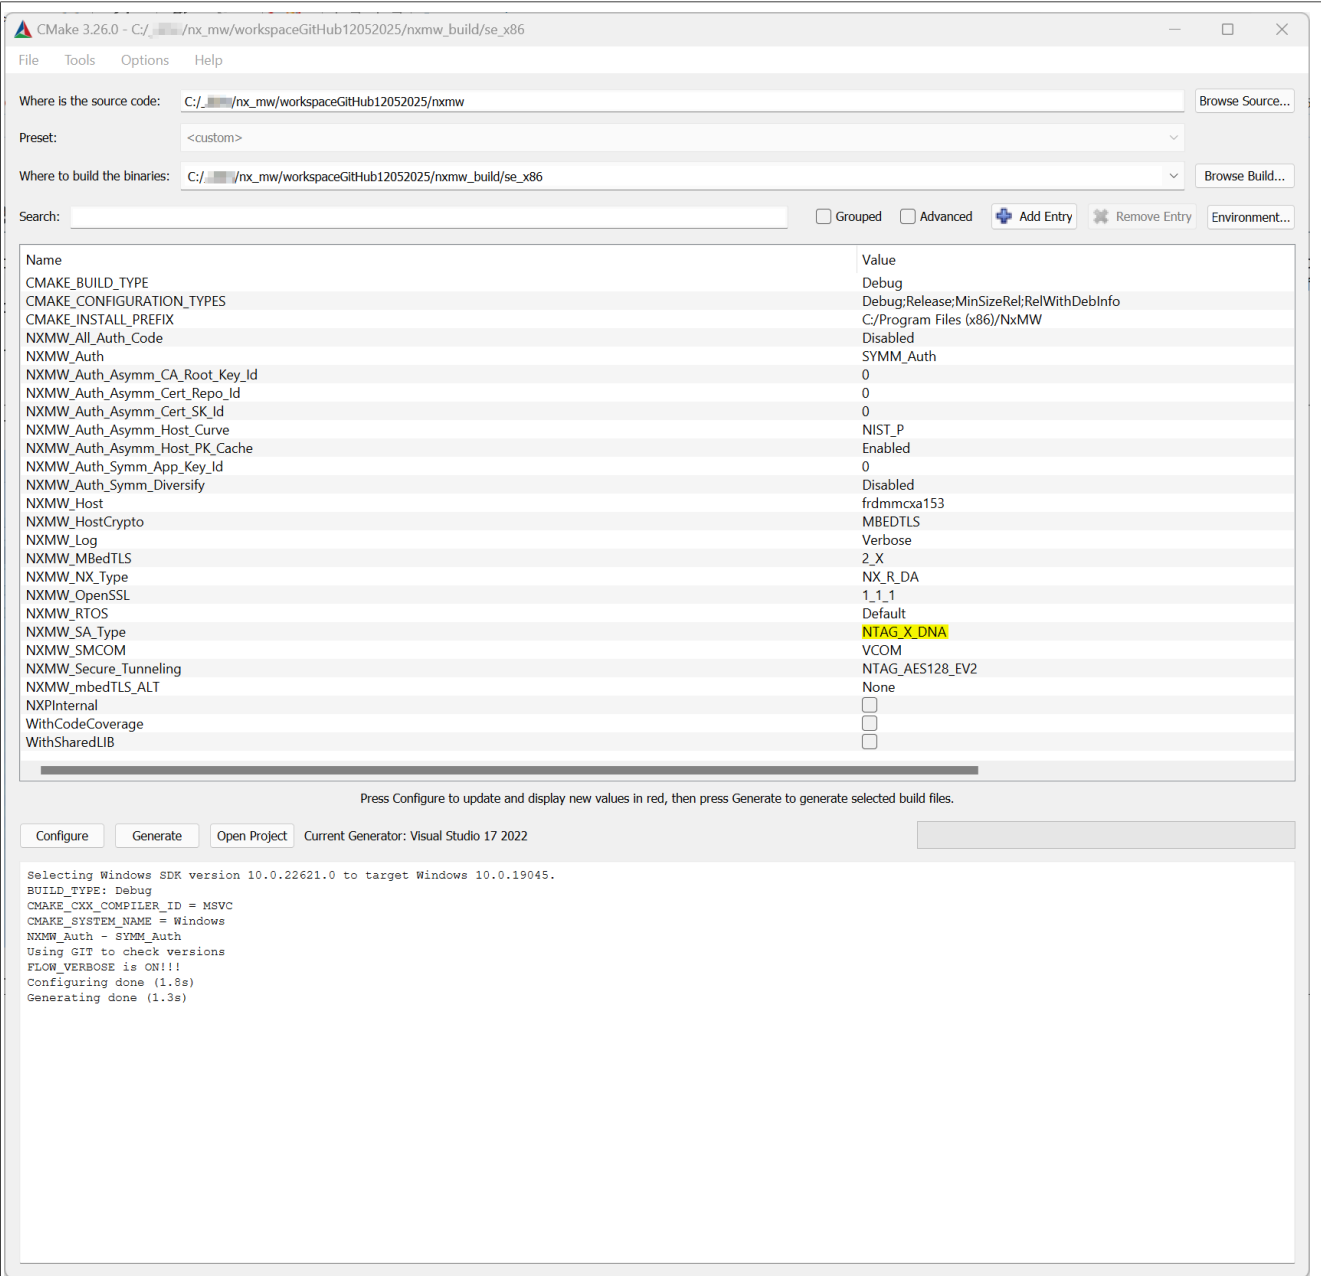


Figure 19. CMake options

3.1.1.2.1 Product specific CMake build settings

The NTAG X DNA Middleware is delivered with CMake files that include the set of directives and instructions describing the project's source files and the build targets. The CMake files are used to select a dedicated application.

3.1.2 Code documentation

The code documentation is provided as a part of the NTAG X DNA Middleware package in the form of HTML and PDF (<https://github.com/NXP/nxmw/tree/main/doc>). The primary audiences for this HTML documentation are programmers, developers, system architects, and system designers. It includes:

- Technical API reference guide
- Instructions to compile and build NTAG X DNA Middleware
- Developer guides to execute the demo and examples'

4 Support documentation

The NTAG X DNA support package includes extensive application notes, user guides that explain NTAG X DNA features, use cases, and how to try out the example code and demo examples provided in the NTAG X DNA Middleware.

[Table 10](#) summarizes the NTAG X DNA documentation available.

Table 10. NTAG X DNA support documentation

Document	Title
AN14137	NTAG X DNA - Features and hints ref.[3]
AN14123	NX Middleware documentation (included in archive of the Middleware sources)
AN14362	NTAG X DNA - Energy Harvesting ref.[4]
AN14513	NTAG X DNA - Dual Interface ref.[5]
AN14326	NTAG X DNA - Antenna Design Guide ref.[6]
UG10083	NTAG X DNA - Quick start guide with product support package (this document) ref.[7]

5 References

- [1] Data sheet - NTAG X DNA - Secure NFC Forum T4T compliant IC with PKI (Public Interface Structure) ([link](#))
- [2] Web page - NTAG X DNA Development Kit ([link](#))
- [3] Application note - AN14137 - NTAG X DNA - Features and hints ([link](#))
- [4] Application note - AN14362 - NTAG X DNA - Energy harvesting ([link](#))
- [5] Application note - AN14513 - NTAG X DNA - Dual Interface ([link](#))
- [6] Application note - AN14236 - NTAG X DNA - Antenna design guide ([link](#))
- [7] User guide - UG10083 - NTAG X DNA - Quick start guide with support package ([link](#))
- [8] Web page – CLRD730 – Pegoda Smart Card Reader Based on PN7642 ([link](#))

6 Revision history

Table 11. Revision history

Document ID	Release date	Description
UG10083 v.1.3	10 November 2025	Editorial changes (typos, etc.) <ul style="list-style-type: none">• Section 2.1.3 "Schematics" updated
UG10083 v.1.2	27. May 2025	Editorial changes. Document security status changed to "public". <ul style="list-style-type: none">• Section 1 "About NTAG X DNA": updated.• Section 2.1.4 "Radio Equipment Directive (RED)": updated.• Section 2.2.1 "I²C interfaces - MCU and MPU boards": updated.• Section 2.2.1.1 "NTAG-X-DNA-EVAL connection to FRDM-MCXA153 development board": added.• Section 2.2.1.2 "NTAG-X-DNA-EVAL connection to FRDM-MCXN947 development board": added.• Section 2.2.1.3 "NTAG-X-DNA-EVAL connection to LPC55 development board": updated.• Section "NTAG-X-DNA-EVAL connection to FRDM-K64 development board": removed.• Section 2.2.2 "NFC interfaces": updated.• Section 3.1 "NTAG X DNA Middleware": updated.• Section 3.1.2 "Code documentation": updated.• Section 4 "Support documentation": updated.• Section 5 "References": updated.
UG10083 v.1.1	11. April 2025	<ul style="list-style-type: none">• Section 1 "About NTAG X DNA": updated• Section 2 "Hardware": added• Section 3 "Software": added• Section 3.1 "NTAG X DNA Middleware": updated• Section 4 "Support documentation": updated• Section 5 "References": updated
UG10083 v.1.0	28. July 2024	<ul style="list-style-type: none">• Initial version

Legal information

Definitions

Draft — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Suitability for use in non-automotive qualified products — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

HTML publications — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately. Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at PSIRT@nxp.com) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. — NXP B.V. is not an operating company and it does not distribute or sell products.

Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

NXP — wordmark and logo are trademarks of NXP B.V.

NTAG — is a trademark of NXP B.V.

Tables

Tab. 1.	Development kit NTAG-X-DNA-EVAL	3	Tab. 6.	Connections to FRDM-MCXN947 development board	9
Tab. 2.	4	Tab. 7.	Connections to LPC55 development board	10
Tab. 3.	Characteristics	6	Tab. 8.	Connections to RaspberryPi development board	11
Tab. 4.	MCU/MPU boards supported by NX Middleware	7	Tab. 9.	Supporting NFC devices	12
Tab. 5.	Connections to FRDM-MCXA153 development board	8	Tab. 10.	NTAG X DNA support documentation	16
			Tab. 11.	Revision history	18

Figures

Fig. 1.	NTAG X DNA evaluation board	3	Fig. 12.	LPCXpresso55S69 Development Board	7
Fig. 2.	Level shifter	3	Fig. 13.	Raspberry Pi 3 development board	8
Fig. 3.	Connecting wires male to female	3	Fig. 14.	NTAG-X-DNA-EVAL connection to FRDM-MCXA153 development board	8
Fig. 4.	NTAG X DNA evaluation board	4	Fig. 15.	NTAG-X-DNA-EVAL connection to FRDM-MCXN947 development board	9
Fig. 5.	Level shifter - top view	4	Fig. 16.	NTAG-X-DNA-EVAL connection to LPC55 development board	10
Fig. 6.	Level shifter - bottom view	4	Fig. 17.	NTAG-X-DNA-EVAL connection to RaspberryPi board	11
Fig. 7.	NTAG X DNA evaluation board connected to the level shifter	4	Fig. 18.	NX Middleware block diagram	13
Fig. 8.	NTAG X DNA evaluation board PCB schematics	5	Fig. 19.	CMake options	14
Fig. 9.	Level shifter PCB schematics	5			
Fig. 10.	FRDM-MCXA153	7			
Fig. 11.	FRDM-MCXN947	7			

Contents

1 About NTAG X DNA2

2 Hardware3

2.1 Evaluation board - NTAG-X-DNA-EVAL3

2.1.1 Pinout4

2.1.2 Connection4

2.1.3 Schematics5

2.1.3.1 NTAG X DNA evaluation board5

2.1.3.2 Level shifter board5

2.1.4 Radio Equipment Directive (RED)6

2.2 Development environment7

2.2.1 I²C interfaces - MCU and MPU boards7

2.2.1.1 NTAG-X-DNA-EVAL connection to FRDM-MCXA153 development board8

2.2.1.2 NTAG-X-DNA-EVAL connection to FRDM-MCXN947 development board9

2.2.1.3 NTAG-X-DNA-EVAL connection to LPC55 development board10

2.2.1.4 NTAG-X-DNA-EVAL connection to RaspberryPi board11

2.2.2 NFC interfaces12

3 Software13

3.1 NTAG X DNA Middleware13

3.1.1 Multiplatform NTAG X DNA Middleware13

3.1.1.1 NTAG X DNA Middleware availability13

3.1.1.2 Building and compiling the NTAG X DNA Middleware13

3.1.2 Code documentation15

4 Support documentation16

5 References17

6 Revision history18

Legal information19

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.