



Arm926EJ-S™ with 256 kB SRAM, USB High-speed OTG, SD/MMC, NAND flash controller, Ethernet

LPC3240FET296

新規採用非推奨


このページでは、新規設計を推奨しない製品に関する情報を掲載しています。

Last Updated: Apr 8, 2022

The LPC3240 operates at CPU frequencies of up to 266 MHz. The NXP® implementation uses an ARM926EJ-S CPU core with a Harvard architecture, 5-stage pipeline, and an integral Memory Management Unit (MMU). The LPC3240 also includes 256 kB of on-chip static RAM, a NAND flash interface, an Ethernet MAC, and an external bus interface that supports SDR and DDR SDRAM, as well as static devices. In addition, the LPC3240 includes a USB 2.0 full-speed interface, seven UARTs, two I2C-bus interfaces, two SPI/SSP ports, two I2S-bus interfaces, two single output PWMs, a motor control PWM, six general purpose timers with capture inputs and compare outputs, a Secure Digital (SD) interface, and a 10-bit Analog-to-Digital Converter (ADC) with a touch screen sense option.

Block diagram: LPC3220FET296, LPC3230FET296, LPC3240FET296, LPC3250FET296

Block Diagram

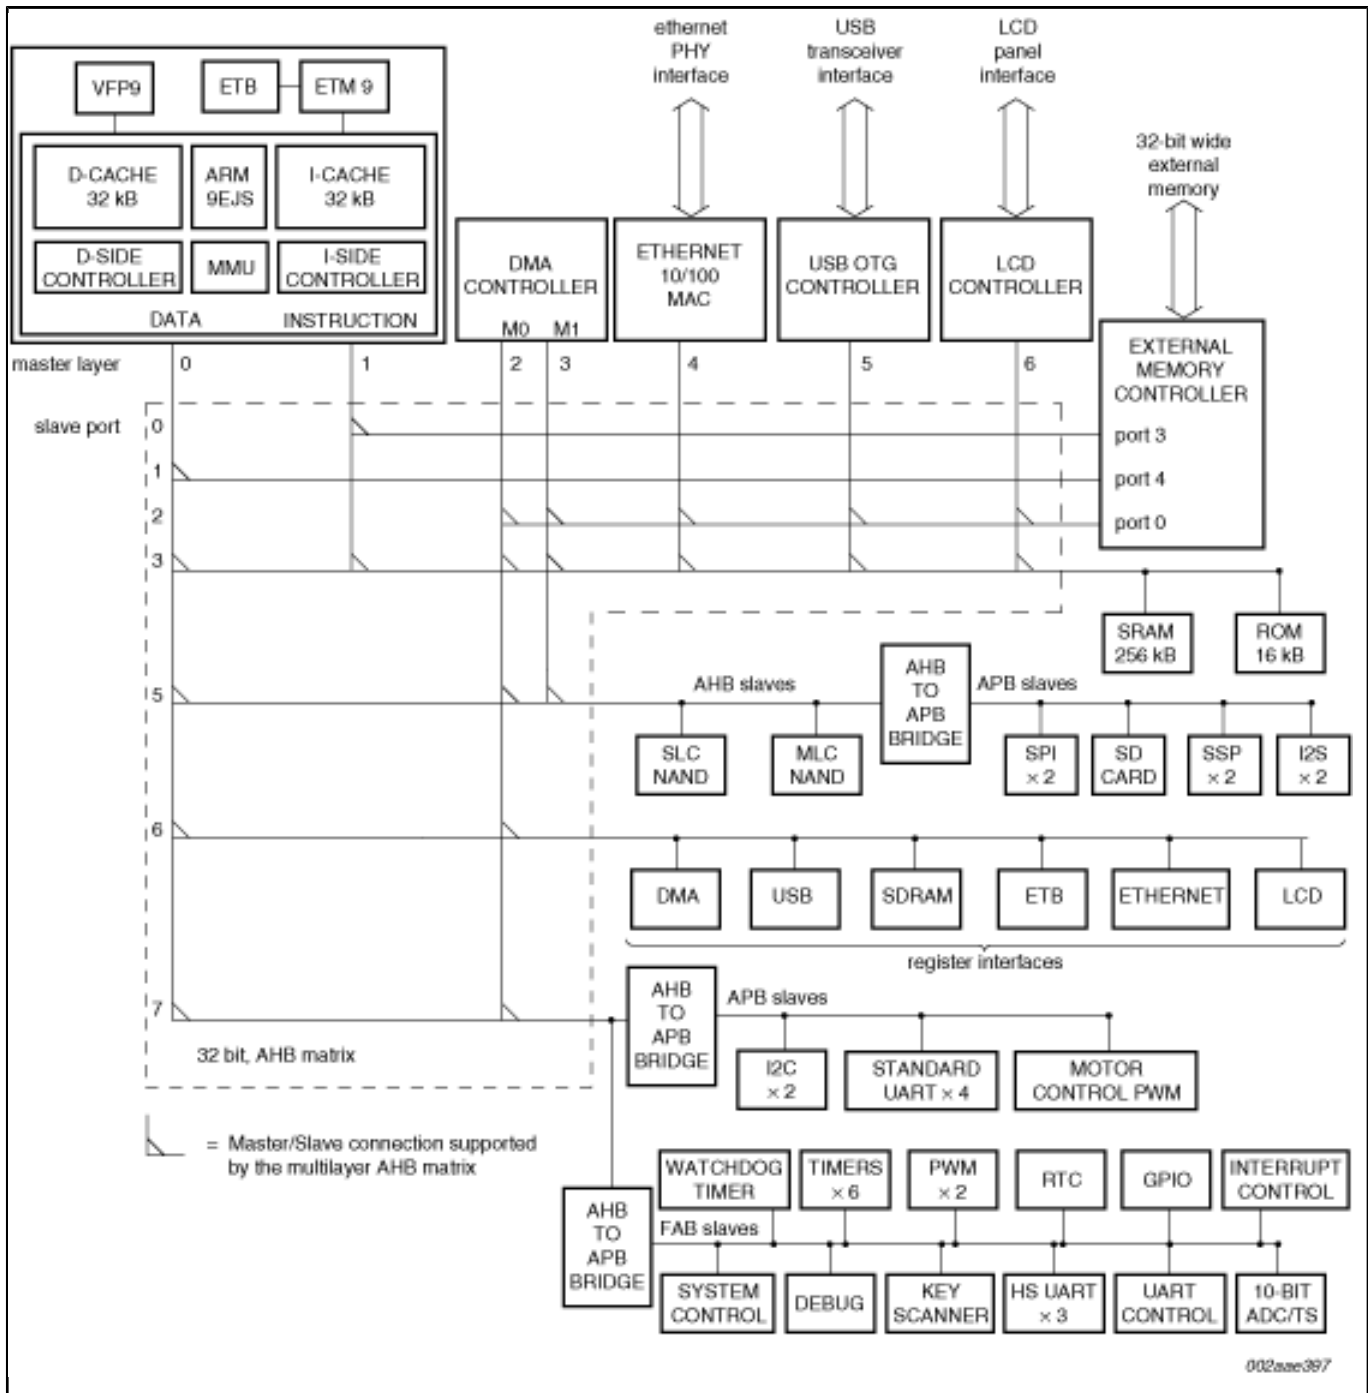

View additional information for [Arm926EJ-S™ with 256 kB SRAM, USB High-speed OTG, SD/MMC, NAND flash controller, Ethernet.](#)

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.