



# H-Bridge, Motor Driver, 2.7-5.5 V, 0.8 A, 200 kHz

## MPC17C724

### Not Recommended for New Designs

このページでは、新規設計を推奨しない製品に関する情報を掲載しています。


Last Updated: Jun 17, 2025

MPC17C724EP device is in End of Life status and is "Not recommended for new designs"

The NXP® MPC17C724 is a compact monolithic dual channel H-Bridge power IC, ideal for portable electronic applications containing bipolar stepper motors or brush DC motors such as those used in camera lenses and shutters.

- Operates efficiently with supply voltages from 2.7 V to 5.5 V and can provide continuous motor drive currents of 0.4 A with low RDS(ON) of 1.0
- Easily interfaced to low-cost MCUs via parallel 3.0 V- or 5.0 V-compatible logic
- Built-in shoot-through current protection circuit and undervoltage detector to avoid malfunction
- The H-bridge outputs are designed to be independently PWM'ed at up to 200 kHz for speed/torque and current control

## H-Bridge, Brushed DC/Stepper Motor Driver, 2.7-5.5V, 0.8A, 200kHz Block Diagram

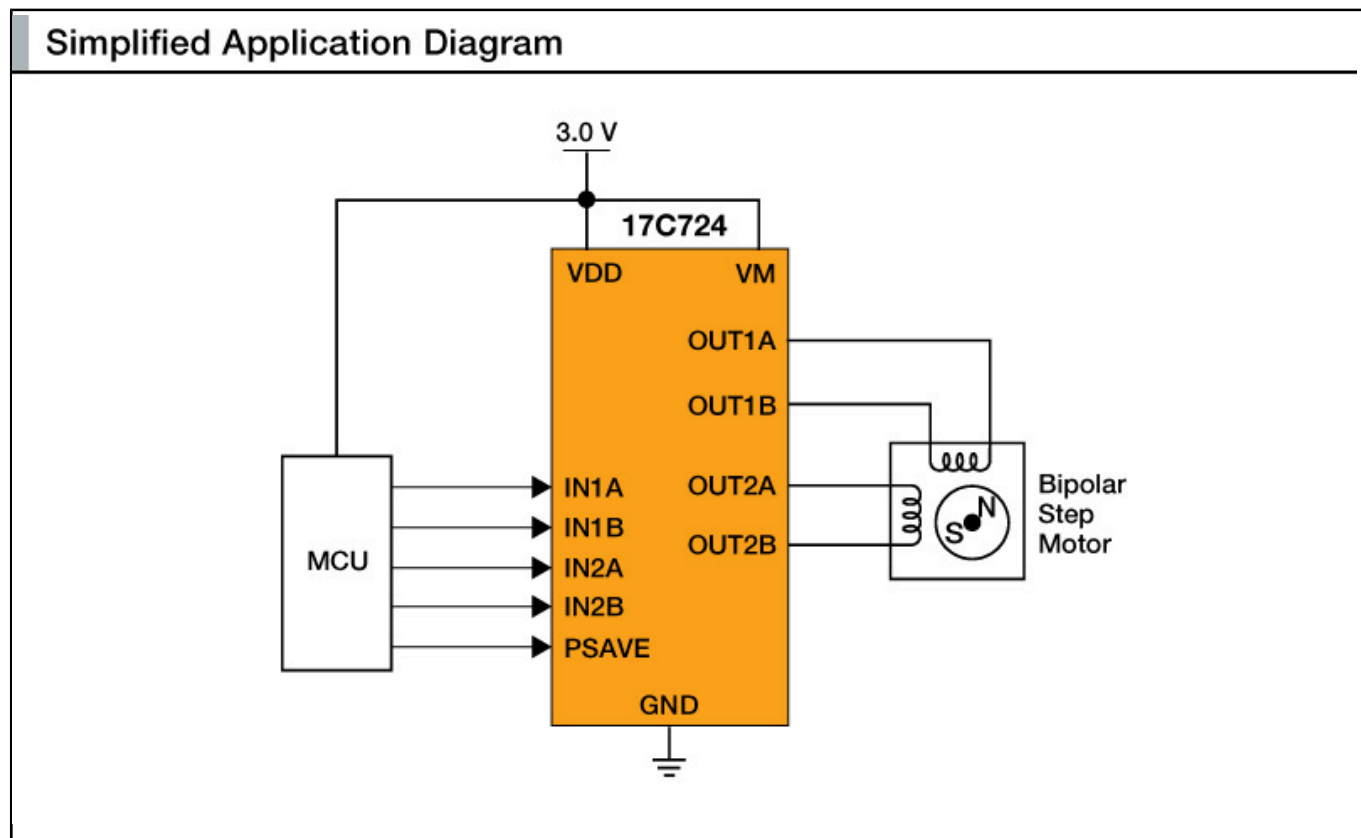

View additional information for [H-Bridge, Motor Driver, 2.7-5.5 V, 0.8 A, 200 kHz](#).

**Note:** The information on this document is subject to change without notice.

**www.nxp.com**

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2025 NXP B.V.