



Hosted Analog Front End for Potentiostat, Voltage and Thermistor Measurements, Extended with NFC Support and Battery Switch

NHS2634 **NEW**


Preproduction

本ページには、試作段階の製品に関する情報が含まれています。記載されている仕様および情報は、予告なく変更される場合があります。詳細については、担当営業までお問い合わせください。

Last Updated: May 18, 2026

The NHS2634 is an analog front-end (AFE) chip for electrochemical sensors, optimized for low-capacity batteries or near-field communication (NFC) power. It supports amperometric, chronoamperometric, voltage and temperature measurements. Self-timed sensing notifies the host when new data is available. It integrates NFC with the ISO Data Exchange Protocol (ISO-DEP), operating at 1.5 V or 3 V and featuring a battery switch for longer shelf life. Enablement is available to non-disclosure agreement (NDA)-approved customers.

NHS2634 Functional Block Diagram

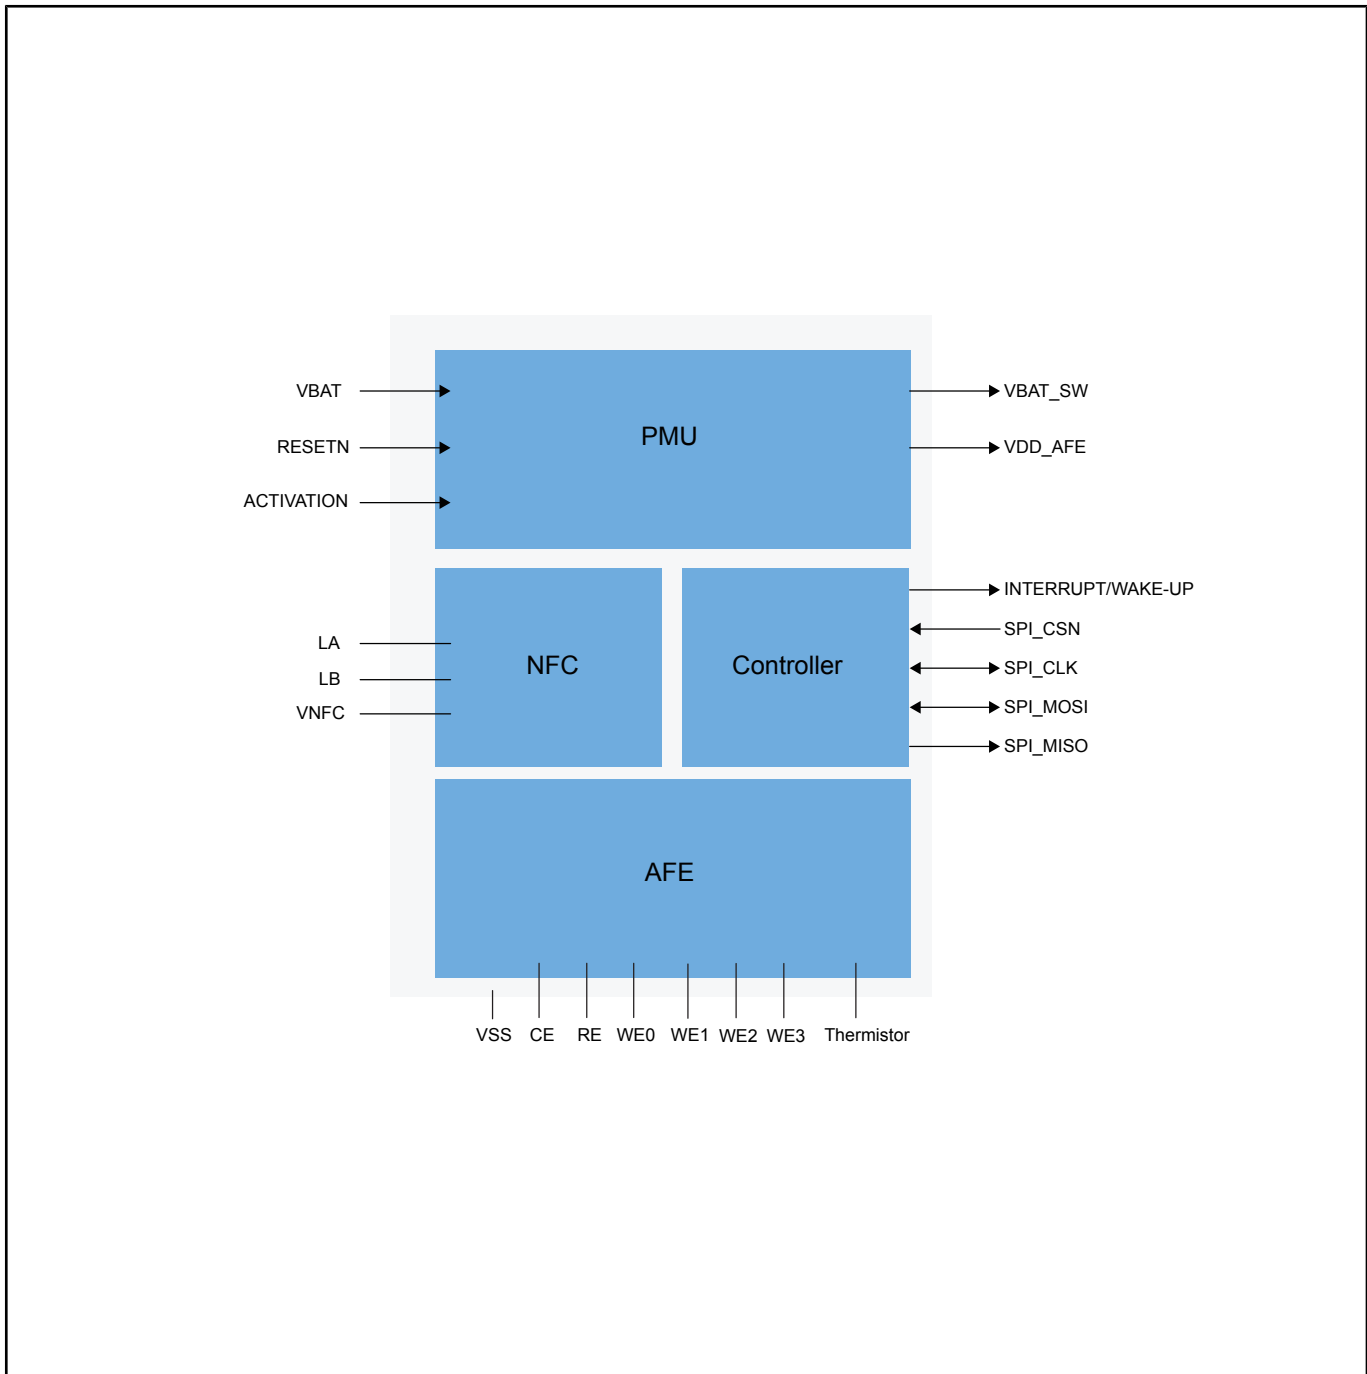

View additional information for [Hosted Analog Front End for Potentiostat, Voltage and Thermistor Measurements, Extended with NFC Support and Battery Switch.](#)

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2026 NXP B.V.