



S32K3X4EVB-T172 車載汎用評価ボード

S32K3X4EVB-T172


Last Updated: May 12, 2024

S32K3X4EVB-T172は、産業分野および自動車分野の汎用アプリケーションに対応する評価/開発ボードです。

S32K3X4EVB-T172は、172 HDQFPパッケージの32ビットArm® Cortex®-M7 S32K3 MCUをベースとし、ロックステップ・モードで構成されたデュアル・コア、ASIL Dセーフティ・ハードウェア、HSEセキュリティ・エンジン、OTAサポート、高度なコネクティビティ、低消費電力に対応しています。

S32K3X4EVB-T172は、Arduino® UNOピン配列互換の標準ベースのフォーム・ファクタを備え、アプリケーションの迅速なプロトタイプ作成やデモのための幅広い拡張ボード・オプションを提供します。

S32K3X4EVB-T172評価ボード Block Diagram

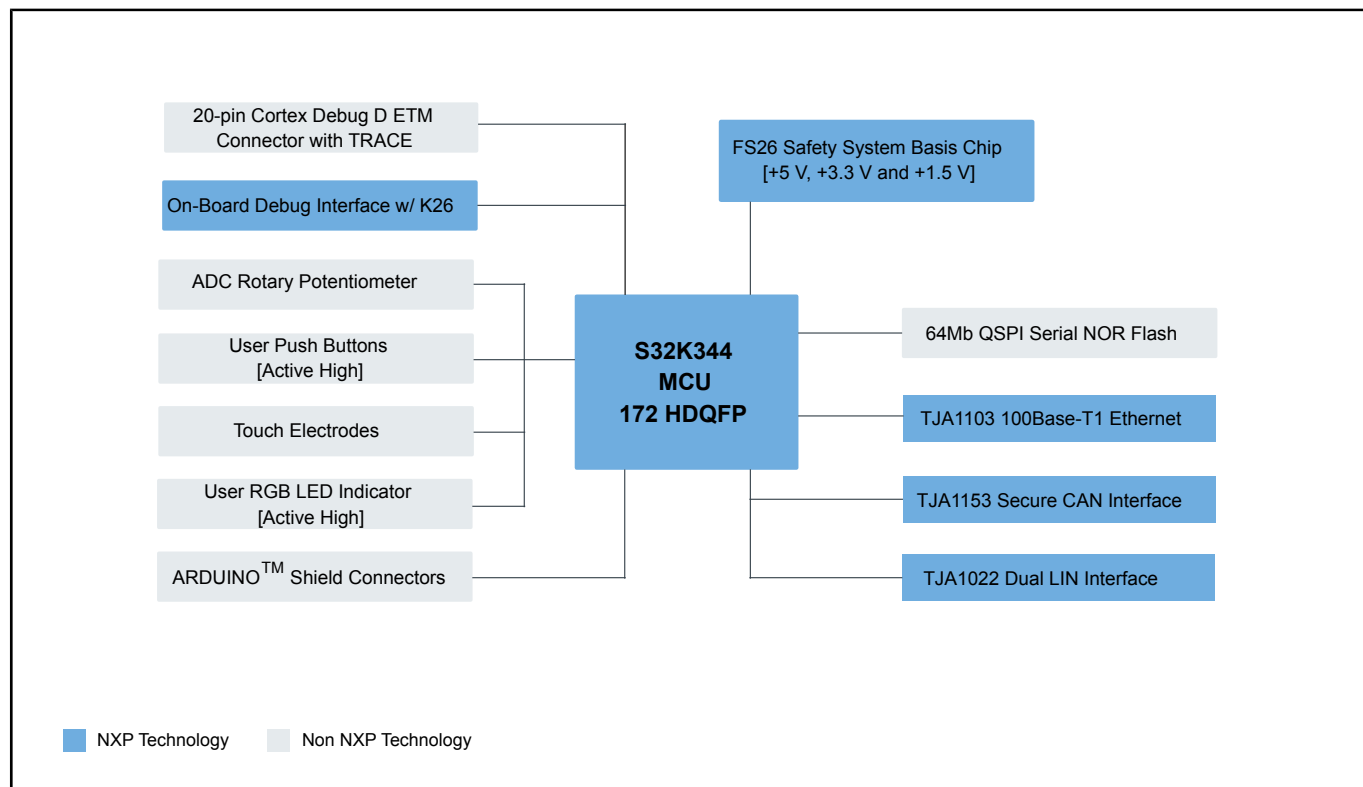

S32K3ファミリの概要 Block Diagram

K311	K312	K314	Common Features	K322	K324	K341	K342	K344	K328	K338	K348	K358	
1 x Arm® Cortex-M7 @120 MHz		1x Cortex-M7 @240MHz	AEC-Q100, 125 °C, 3,3/5 V	2 x Cortex-M7 @240 MHz		1 Lockstep Cortex-M7 @ 240 MHz			2 x Cortex-M7 @ 240 MHz	3 x Cortex-M7 @ 240 MHz	1 LS Cortex-M7 @ 240 MHz	1 LS Cortex-M7 + 1 Cortex-M7 @ 240 MHz	
1 MB Flash	2 MB Flash	4 MB Flash	HSE-B Crypto Security Engine	2 MB Flash	4 MB Flash	1 MB Flash	2 MB Flash	4 MB Flash	8 MB Flash				
128 K SRAM	192 K SRAM	512 K SRAM	FOTA (Firmware Over-the-Air)	256 k SRAM	512 k SRAM	256 k SRAM	256 k SRAM	512 k SRAM	1152 KB SRAM	1152 KB SRAM	1152 KB SRAM	1152 KB SRAM	
up to 84 I/Os		up to 143 I/Os	up to 218 I/Os	up to 143 I/Os	up to 218 I/Os	up to 143 I/Os	up to 143 I/Os	up to 218 I/Os	up to 218 I/Os				
16-ch, eDMA		32-ch, eDMA		32-ch, eDMA					32-ch, eDMA				
3 x CAN (3 x FD)	6 x CAN (6 x FD)		Low-Power Operating Modes and Peripherals (LP UART, FlexIO)	4 x CAN (4 x FD)	6 x CAN (6 x FD)	4 x CAN (4 x FD)	4 x CAN (4 x FD)	6 x CAN (6 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	8 x CAN (8 x FD)	
		100 Mbit/s Ethernet (TSN)	ASIL B/D Safety: (ECC Memories, MPU, CRC, Watchdogs)	100 Mbit/s Ethernet (TSN)					1 Gbit/s Ethernet (TSN)				
2 x I2C	2 x I2C	2 x I2C	eMIOS Timers, Analogue Comparator, Logic Control Unit, Body Cross Triggering Unit, Trigger Mux	2 x I2C	2 x I2C	2 x I2C	2 x I2C	2 x I2C	2 x I2C				
4 x SPI*		6 x SPI*		4 x SPI*	6 x SPI*	4 x SPI*	4 x SPI*	6 x SPI*	6 x SPI*				
2 x 24-ch, 12-bit ADC		3 x 24-ch, 12-bit ADC		2 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC	2 x 24-ch, 12-bit ADC	2 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC	3 x 24-ch, 12-bit ADC				
		2 x SAI (FS)		2 x SAI (FS)					2 x SAI (FS)				
		Quad SPI		Quad SPI					Quad SPI + SDHC (SDIO)				
LOFP-48	HDQFP-172		Real-Time Drivers (AUTOSAR® and Non-AUTOSAR)	HDQFP-172				HDQFP-172					
HDQFP-100				HDQFP-100		HDQFP-100	HDQFP-100						
		MAPBGA-257		MAPBGA-257				MAPBGA-257	MAPBGA-289				
		Security FW Safety Software Framework Application Software											

View additional information for [S32K3X4EV-B-T172 車載汎用評価ボード](#).

Note: The information on this document is subject to change without notice.

www.nxp.com

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.