



# TFA9879HN, Mono BTL Class D Audio Amplifier for Portable Applications with Digital Input

## TFA9879HN

新規採用非推奨

このページでは、新規設計を推奨しない製品に関する情報を掲載しています。


Last Updated: Mar 22, 2024

The TFA9879 contains a processor that supports a range of sound processing features including a 5-band parametric equalizer, separate bass and treble control, a dynamic range compressor, soft clip control and volume control. Excellent audio performance combined with high Power Supply Rejection Ratio (PSRR) is achieved through the use of a closed loop configuration.

Two independent digital audio inputs (I<sup>2</sup>S-bus / PCM / IOM2) are available for connecting both a baseband and a multimedia processor.

The TFA9879 is available in a HVQFN24 package.

# TFA9879 Block Diagram Block Diagram

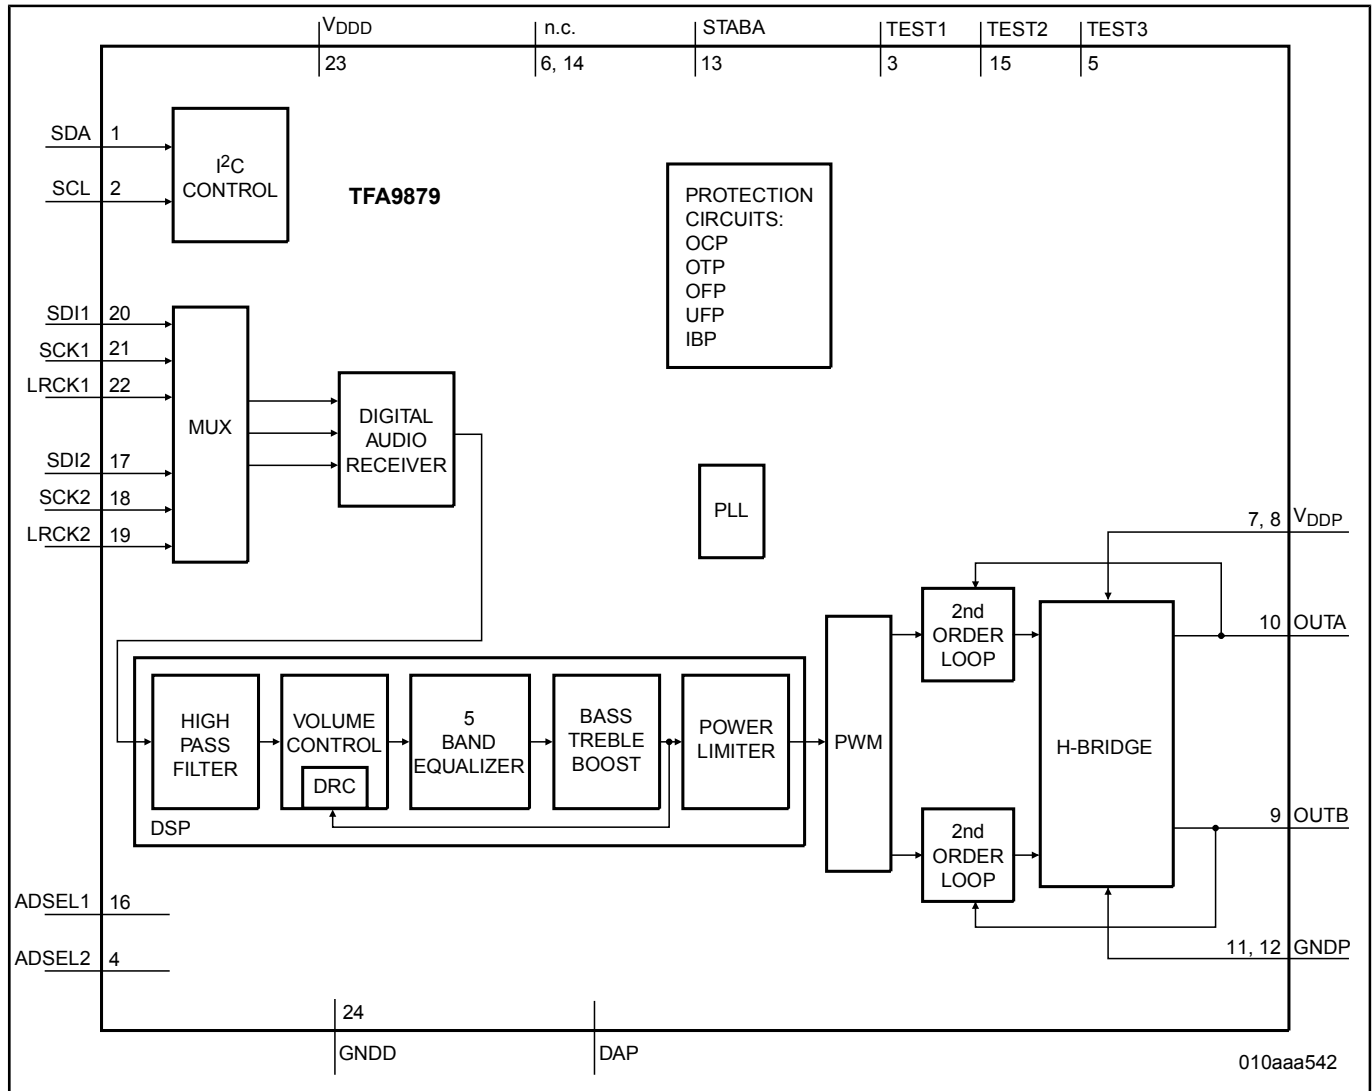

View additional information for [TFA9879HN, Mono BTL Class D Audio Amplifier for Portable Applications with Digital Input.](#)

Note: The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.