

PCAL9722

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features,
Interrupt Output, and Reset

Rev. 1.2 — 3 July 2025

Product data sheet

Document information

Information	Content
Keywords	PCAL9722, data sheet, remote I/O expansion, microcontroller
Abstract	The PCAL9722 device is a 22-bit general-purpose I/O expander that provides remote I/O expansion for most microcontroller families via the SPI interface. The ultra low-voltage interface allows for direct connection to a microcontroller operating down to 1.1 V.



1 General description

The PCAL9722 device is a 22-bit general-purpose I/O expander that provides remote I/O expansion for most microcontroller families via the SPI interface. The ultra low-voltage interface allows for direct connection to a microcontroller operating down to 1.1 V.

NXP I/O expanders provide a simple solution when additional I/Os are needed while keeping interconnections to a minimum. Some applications include battery-powered mobile applications for interfacing to sensors, push buttons, keypad, and so on. In addition to providing a flexible set of GPIOs, it simplifies interconnection of a processor running at one voltage level down to 1.1 V to I/O devices operating at a different voltage level 1.65 V to 5.5 V. The PCAL9722 has a built-in level shifting feature that makes these devices flexible in mixed power supply systems where communication between incompatible I/O voltages is required. This feature allows seamless communication with next-generation low-voltage microprocessors and microcontrollers on the interface side (SPI) and peripherals at higher voltage on the port side.

There are two supply voltages for PCAL9722: $V_{DD(SPI)}$ and $V_{DD(P)}$. $V_{DD(SPI)}$ provides the supply voltage for the interface at the controller side (for example, a microcontroller). $V_{DD(P)}$ provides the supply for core circuits and Port P. The bidirectional voltage level translation in the PCAL9722 is provided through $V_{DD(SPI)}$. $V_{DD(SPI)}$ must be connected to the V_{DD} of the external SPI lines. This operation indicates the V_{DD} level of the SPI to the PCAL9722, while $V_{DD(P)}$ determines the voltage level on port P of the PCAL9722.

The PCAL9722 works up to 5 MHz of SCLK speed and implements Agile I/O, which are additional features specifically designed to enhance the I/O. These additional features are: programmable output drive strength, latchable inputs, programmable pull-up/pull-down resistors, maskable interrupt, interrupt status register, and programmable open-drain or push-pull outputs.

Additional Agile I/O Plus features include interrupts that can be specified by level or edge, and can be cleared individually without disturbing the other interrupt events. Also, switch debounce hardware is implemented.

At power-on, the I/Os are configured as inputs. However, the system controller can enable the I/Os as either inputs or outputs by writing to the I/O configuration bits. The data for each input or output is kept in the corresponding input or output register. The polarity of the Input Port register can be inverted with the Polarity Inversion register, saving external logic gates. Programmable pull-up and pull-down resistors eliminate the need for discrete components.

The system controller can reset the PCAL9722 in the event of a time-out or other improper operation by asserting a LOW in the \overline{RESET} input. The power-on reset puts the registers in their default state and initializes the SPI state machine. The \overline{RESET} pin causes the same reset/initialization to occur without de-powering the part.

The PCAL9722 open-drain interrupt (\overline{INT}) output is activated when any input state differs from its corresponding Input Port register state and is used to indicate to the system controller that an input state has changed. As well, the \overline{INT} output can be specified to activate on input pin edges. There are many interrupt mask functions available to maximize flexibility.

\overline{INT} can be connected to the interrupt input of a microcontroller. Sending an interrupt signal on this line lets the remote I/O inform the microcontroller of any incoming data on its ports without communication via SPI bus. Therefore, the PCAL9722 can remain a simple target device. The input latch feature holds/latches the input pin state and keeps the logic values that created the interrupt until the controller can service the interrupt. This process minimizes the interrupt service response of the host for fast moving inputs.

The device port P outputs have 25 mA sink capabilities for directly driving LEDs while consuming low device current.

One hardware pin (ADDR) can be used to program and vary the fixed SPI address and allow up to two devices to share SPI bus.

2 Features and benefits

- SPI bus to parallel port expander
- 5 MHz SPI bus
- Operating power supply voltage range of 1.1 V to 5.5 V on the SPI bus side
- Allows bidirectional voltage-level translation and GPIO expansion between 1.1 V to 5.5 V on SPI and 1.8 V, 2.5 V, 3.3 V, 5.5 V on Port P
- Low standby current consumption: 2.0 μ A typical at 3.3 V V_{DD}
- Schmitt trigger action allows slow input transition and better switching noise immunity at the SPI inputs (SCLK, SDIN, CS)
 - V_{hys} = 0.11 V (typical) at 1.1 V
 - V_{hys} = 0.18 V (typical) at 1.8 V
 - V_{hys} = 0.33 V (typical) at 3.3 V
 - V_{hys} = 0.55 V (typical) at 5.5 V
- 5.5 V tolerant I/O ports and SPI bus pins
- Active LOW reset input (\overline{RESET})
- Open-drain active LOW interrupt output (\overline{INT})
- Internal power-on reset
- Noise filter on SPI inputs
- Latched outputs with 25 mA drive maximum capability for directly driving LEDs
- Latch-up performance exceeds 100 mA per JESD 78, Class II
- ESD protection exceeds JESD 22
 - 2000 V human-body model (A114-A)
 - 1000 V charged-device model (C101)
- Package offered: HVQFN32

2.1 Agile I/O features

- Output port configuration: bank selectable or pin selectable push-pull or open-drain output stages
- Interrupt status: read-only register identifies the source of an interrupt
- Bit-wise I/O programming features:
 - Output drive strength: four programmable drive strengths to reduce rise and fall times in low-capacitance applications
 - Input latch: Input port register values changes are kept until the input port register is read
 - Pull-up/pull-down enable: floating input or pull-up/pull-down resistor enable
 - Pull-up/pull-down selection: 100 k Ω pull-up/pull-down resistor selection
 - Interrupt mask: mask prevents the generation of the interrupt when input changes state to prevent spurious interrupts

2.2 Additional Agile I/O Plus features

- Interrupt edge specification on a bit-by-bit basis
- Interrupt individual clear without disturbing other events
- Read all interrupt events without clear
- Switch debounce hardware

3 Ordering information

[Table 1](#) describes the ordering information for PCAL9722.

Table 1. Ordering information

Type number	Topside marking	Package		
		Name	Description	Version
PCAL9722HN	L9722	HVQFN32	Plastic, thermal enhanced very thin quad flat package; 0.125 dimple wettable flank; 32 terminals; 0.5 mm pitch; 5 mm x 5 mm x 0.85 mm body	SOT617-3
PCAL9722HN/Q900 ^[1]	9722Q	HVQFN32	Plastic, thermal enhanced very thin quad flat package; 0.125 dimple wettable flank; 32 terminals; 0.5 mm pitch; 5 mm x 5 mm x 0.85 mm body	SOT617-3

[1] Automotive AEC-Q100 (Grade 1) compliant. Contact NXP support for PPAP.

3.1 Ordering options

[Table 2](#) describes the ordering options for PCAL9722.


Table 2. Ordering options

Type number	Orderable part number	Package	Packing method	Minimum order quantity	Temperature
PCAL9722HN	PCAL9722HNMP	HVQFN32	Reel 13" Q2/T3 SMD DP	6000	T _{amb} = -40 °C to +85 °C
PCAL9722HN/Q900 ^[1]	PCAL9722HN/Q900MP	HVQFN32	Reel 13" Q2/T3 SMD DP	6000	T _{amb} = -40 °C to +125 °C

[1] Automotive AEC-Q100 (Grade 1) compliant. Contact NXP support for PPAP.

4 Block diagram

Figure 1 shows the labeled block diagram of PCAL9722.

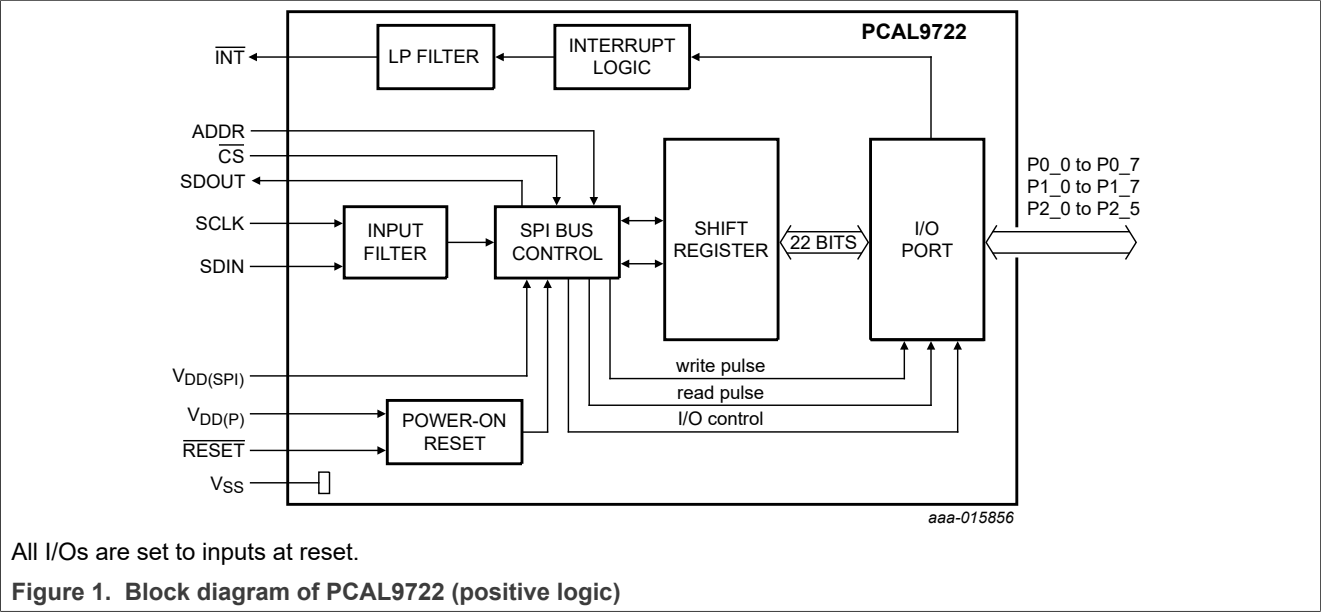

All I/Os are set to inputs at reset.


Figure 1. Block diagram of PCAL9722 (positive logic)

5 Pinning information

This section provides the pin configuration and description of the HVQFN32 package.

5.1 Pinning

Figure 2 shows the pinning for PCAL9722HN.

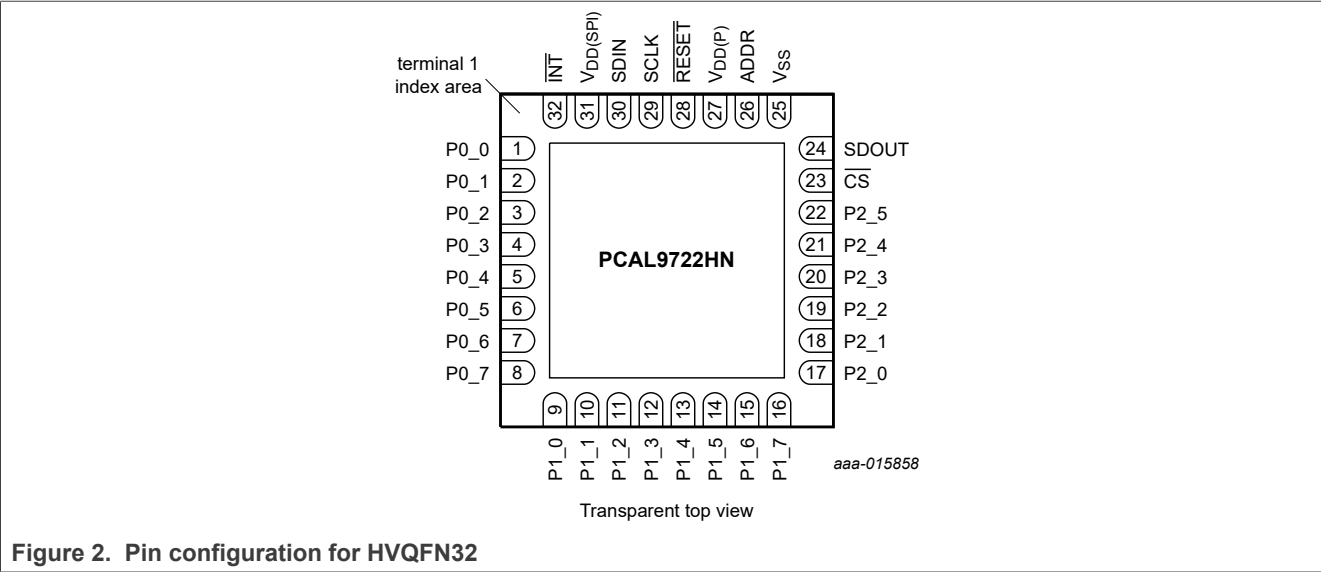

5.2 Pin description

Table 3 provides detailed description of various pins on PCAL9722.

Table 3. Pin description

Symbol	Pin	Type	Description
SCLK	29	I	SPI serial clock input
SDIN	30	I	SPI serial data input
V _{DD(SPI)}	31	Power supply	Supply voltage of SPI bus. Connect directly to the V _{DD} of the external SPI bus controller. Provides voltage-level translation.
INT	32	O	Interrupt output. Connect to V _{DD(SPI)} or V _{DD(P)} through a pull-up resistor.
P0_0 ^[1]	1	I/O	Port 0 input/output 0
P0_1 ^[1]	2	I/O	Port 0 input/output 1
P0_2 ^[1]	3	I/O	Port 0 input/output 2
P0_3 ^[1]	4	I/O	Port 0 input/output 3
P0_4 ^[1]	5	I/O	Port 0 input/output 4
P0_5 ^[1]	6	I/O	Port 0 input/output 5
P0_6 ^[1]	7	I/O	Port 0 input/output 6
P0_7 ^[1]	8	I/O	Port 0 input/output 7
P1_0 ^[2]	9	I/O	Port 1 input/output 0

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 3. Pin description...continued

Symbol	Pin	Type	Description
P1_1 ^[2]	10	I/O	Port 1 input/output 1
P1_2 ^[2]	11	I/O	Port 1 input/output 2
P1_3 ^[2]	12	I/O	Port 1 input/output 3
P1_4 ^[2]	13	I/O	Port 1 input/output 4
P1_5 ^[2]	14	I/O	Port 1 input/output 5
P1_6 ^[2]	15	I/O	Port 1 input/output 6
P1_7 ^[2]	16	I/O	Port 1 input/output 7
P2_0 ^[3]	17	I/O	Port 2 input/output 0
P2_1 ^[3]	18	I/O	Port 2 input/output 1
P2_2 ^[3]	19	I/O	Port 2 input/output 2
P2_3 ^[3]	20	I/O	Port 2 input/output 3
P2_4 ^[3]	21	I/O	Port 2 input/output 4
P2_5 ^[3]	22	I/O	Port 2 input/output 5
CS	23	I	SPI chip select input
SDOUT	24	O	SPI serial data output
V _{SS}	25	Ground	Supply ground
ADDR	26	I	Address input. Connect directly to V _{DD(SPI)} or ground.
V _{DD(P)}	27	Power supply	Supply voltage of PCAL9722 for Port P
RESET	28	I	Active LOW reset input. Connect to V _{DD(SPI)} through a pull-up resistor if no active connection is used.

[1] Pins P0_0 to P0_7 correspond to bits P0.0 to P0.7. At power-on, all I/Os are configured as inputs.

[2] Pins P1_0 to P1_7 correspond to bits P1.0 to P1.7. At power-on, all I/Os are configured as inputs.

[3] Pins P2_0 to P2_5 correspond to bits P2.0 to P2.5. At power-on, all I/Os are configured as inputs.

6 Functional description

Refer to [Figure 1](#).


6.1 Device address

Following a chip select (\overline{CS}) asserted condition (from HIGH to LOW), the bus controller must send the target address followed by a read ($R/\overline{W} = 1$) or write ($R/\overline{W} = 0$) operation bit. The target address of the PCAL9722 is shown in [Figure 3](#). Target address pin ADDR chooses one of two target addresses. [Table 4](#) shows all two target addresses by connecting the ADDR pin to V_{SS} , or V_{DD} .

Table 4. PCAL9722 address map

ADDR	Device family high-order address bits						Variable portion of address	Address
	A6	A5	A4	A3	A2	A1	A0	
V_{SS}	0	1	0	0	0	0	0	40h
V_{DD}	0	1	0	0	0	0	1	42h

The last bit of the first byte defines the reading from or writing to the PCAL9722. When set to logic 1, a read is selected, while logic 0 selects a write operation.

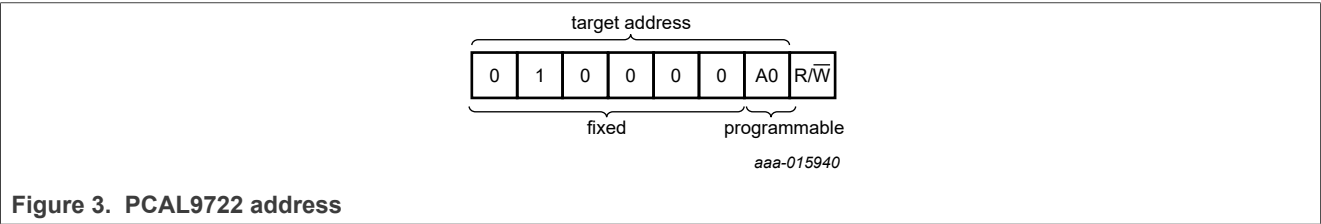

6.2 Interface definition

[Table 5](#) provides the interface definitions of PCAL9722.

Table 5. Interface definition

Byte	Bit							
	7 (MSB)	6	5	4	3	2	1	0 (LSB)
SPI-bus target address	L	H	L	L	L	L	ADDR	R/ \overline{W}
I/O data bus	P0.7	P0.6	P0.5	P0.4	P0.3	P0.2	P0.1	P0.0
	P1.7	P1.6	P1.5	P1.4	P1.3	P1.2	P1.1	P1.0
	-	-	P2.5	P2.4	P2.3	P2.2	P2.1	P2.0

6.3 Pointer register and command byte

Following the first byte of the target address, the bus controller sends a command byte, which is write only and stored in the pointer register in the PCAL9722. The lowest 7 bits ($B[6:0]$ in [Table 6](#)) are used as a pointer to determine which register is accessed and the highest bit is used as Auto-Increment (AI) as shown in [Figure 4](#). At power-up or hardware reset, the pointer register defaults to 00h, with the AI bit set to '0' and the lowest seven bits set to '000 0000'.

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

When the AI bit is set (AI = 1), the seven low-order bits of the pointer register are automatically incremented after a read or write until the chip select (CS) is de-asserted. This process allows the user to program the registers sequentially without modifying the pointer register. The contents of these bits roll over to '000 0000' after the last register (address = 76h) is accessed. Unimplemented register addresses (reserved registers) are skipped. If more than 52 bytes are written, the address loops back to the register which is indicated by the seven low-order bits in the pointer register, and previously written data is overwritten. The de-assertion of chip select (CS) condition keeps the pointer register value in the last read or write location.

When the AI bit is cleared (AI = 0), the 2 least significant bits are automatically incremented after a read or write for the 3-register group which allows the user to program each of the 3-register group sequentially. If more than 3 bytes of data are read or written when AI is 0, previous data in the selected registers is overwritten. For example: if input port 1 is read first, the next 2nd byte will be input port 2, and the next 3rd byte will be input port 0. There is no limit on the number of data bytes for this read operation. There are two special 6-register groups: output drive strength (40h~45h) and interrupt edge (60h~65h) registers. These registers allow the user to program each of the 6-register group sequentially. Only the output port configuration register location (5Ch) remains in the same location after a successive read or write.

AI	B6	B5	B4	B3	B2	B1	B0
0	0	0	0	0	0	0	0

— default value at power-up or HW reset

aaa-015941

AI = Auto-Increment

Figure 4. Pointer register bits

Table 6. Command byte

Pointer register bits							Command byte (hexadecimal)	Register	Protocol	Power-up default
B6	B5	B4	B3	B2	B1	B0				
0	0	0	0	0	0	0	00h	Input port 0	Read byte	xxxx xxxx ^[1]
0	0	0	0	0	0	1	01h	Input port 1	Read byte	xxxx xxxx ^[1]
0	0	0	0	0	1	0	02h	Input port 2	Read byte	xxxx xxxx ^[1]
0	0	0	0	0	1	1	03h	Reserved ^[2]	Reserved	reserved
0	0	0	0	1	0	0	04h	Output port 0	Read/write byte	1111 1111
0	0	0	0	1	0	1	05h	Output port 1	Read/write byte	1111 1111
0	0	0	0	1	1	0	06h	Output port 2	Read/write byte	1111 1111
0	0	0	0	1	1	1	07h	Reserved ^[2]	Reserved	Reserved
0	0	0	1	0	0	0	08h	Polarity Inversion port 0	Read/write byte	0000 0000
0	0	0	1	0	0	1	09h	Polarity Inversion port 1	Read/write byte	0000 0000
0	0	0	1	0	1	0	0Ah	Polarity Inversion port 2	Read/write byte	0000 0000
0	0	0	1	0	1	1	0Bh	Reserved ^[2]	Reserved	Reserved
0	0	0	1	1	0	0	0Ch	Configuration port 0	Read/write byte	1111 1111
0	0	0	1	1	0	1	0Dh	Configuration port 1	Read/write byte	1111 1111
0	0	0	1	1	1	0	0Eh	Configuration port 2	Read/write byte	1111 1111
-	-	-	-	-	-	-	0Fh to 3Fh	Reserved ^[2]	Reserved	Reserved

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 6. Command byte...continued

Pointer register bits							Command byte (hexadecimal)	Register	Protocol	Power-up default
B6	B5	B4	B3	B2	B1	B0				
1	0	0	0	0	0	0	40h	Output drive strength register port 0A	Read/write byte	1111 1111
1	0	0	0	0	0	1	41h	Output drive strength register port 0B	Read/write byte	1111 1111
1	0	0	0	0	1	0	42h	Output drive strength register port 1A	Read/write byte	1111 1111
1	0	0	0	0	1	1	43h	Output drive strength register port 1B	Read/write byte	1111 1111
1	0	0	0	1	0	0	44h	Output drive strength register port 2A	Read/write byte	1111 1111
1	0	0	0	1	0	1	45h	Output drive strength register port 2B	Read/write byte	1111 1111
1	0	0	0	1	1	0	46h	Reserved ^[2]	Reserved	Reserved
1	0	0	0	1	1	1	47h	Reserved ^[2]	Reserved	Reserved
1	0	0	1	0	0	0	48h	Input latch register port 0	Read/write byte	0000 0000
1	0	0	1	0	0	1	49h	Input latch register port 1	Read/write byte	0000 0000
1	0	0	1	0	1	0	4Ah	Input latch register port 2	Read/write byte	0000 0000
1	0	0	1	0	1	1	4Bh	Reserved ^[2]	Reserved	Reserved
1	0	0	1	1	0	0	4Ch	Pull-up/pull-down enable register port 0	Read/write byte	0000 0000
1	0	0	1	1	0	1	4Dh	Pull-up/pull-down enable register port 1	Read/write byte	0000 0000
1	0	0	1	1	1	0	4Eh	Pull-up/pull-down enable register port 2	Read/write byte	0000 0000
1	0	0	1	1	1	1	4Fh	Reserved ^[2]	Reserved	Reserved
1	0	1	0	0	0	0	50h	Pull-up/pull-down selection register port 0	Read/write byte	1111 1111
1	0	1	0	0	0	1	51h	Pull-up/pull-down selection register port 1	Read/write byte	1111 1111
1	0	1	0	0	1	0	52h	Pull-up/pull-down selection register port 2	Read/write byte	1111 1111
1	0	1	0	0	1	1	53h	Reserved ^[2]	Reserved	Reserved
1	0	1	0	1	0	0	54h	Interrupt mask register port 0	Read/write byte	1111 1111
1	0	1	0	1	0	1	55h	Interrupt mask register port 1	Read/write byte	1111 1111
1	0	1	0	1	1	0	56h	Interrupt mask register port 2	Read/write byte	1111 1111
1	0	1	0	1	1	1	57h	Reserved ^[2]	Reserved	Reserved
1	0	1	1	0	0	0	58h	Interrupt status register port 0	Read byte	0000 0000
1	0	1	1	0	0	1	59h	Interrupt status register port 1	Read byte	0000 0000
1	0	1	1	0	1	0	5Ah	Interrupt status register port 2	Read byte	0000 0000
1	0	1	1	0	1	1	5Bh	Reserved ^[2]	Reserved	Reserved
1	0	1	1	1	0	0	5Ch ^[3]	Output port configuration register	Read/write byte	0000 0000
1	0	1	1	1	0	1	5Dh	Reserved ^[2]	Reserved	Reserved
1	0	1	1	1	1	0	5Eh	Reserved ^[2]	Reserved	Reserved

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 6. Command byte...continued

Pointer register bits							Command byte (hexadecimal)	Register	Protocol	Power-up default
B6	B5	B4	B3	B2	B1	B0				
1	0	1	1	1	1	1	5Fh	Reserved ^[2]	Reserved	Reserved
1	1	0	0	0	0	0	60h	Interrupt edge register port 0A	Read/write byte	0000 0000
1	1	0	0	0	0	1	61h	Interrupt edge register port 0B	Read/write byte	0000 0000
1	1	0	0	0	1	0	62h	Interrupt edge register port 1A	Read/write byte	0000 0000
1	1	0	0	0	1	1	63h	Interrupt edge register port 1B	Read/write byte	0000 0000
1	1	0	0	1	0	0	64h	Interrupt edge register port 2A	Read/write byte	0000 0000
1	1	0	0	1	0	1	65h	Interrupt edge register port 2B	Read/write byte	0000 0000
1	1	0	0	1	1	0	66h	Reserved ^[2]	Reserved	Reserved
1	1	0	0	1	1	1	67h	Reserved ^[2]	Reserved	Reserved
1	1	0	1	0	0	0	68h	Interrupt clear register port 0	Write byte	0000 0000
1	1	0	1	0	0	1	69h	Interrupt clear register port 1	Write byte	0000 0000
1	1	0	1	0	1	0	6Ah	Interrupt clear register port 2	Write byte	0000 0000
1	1	0	1	0	1	1	6Bh	Reserved ^[2]	Reserved	Reserved
1	1	0	1	1	0	0	6Ch	Input status port 0	Read byte	xxxx xxxx ^[1]
1	1	0	1	1	0	1	6Dh	Input status port 1	Read byte	xxxx xxxx ^[1]
1	1	0	1	1	1	0	6Eh	Input status port 2	Read byte	xxxx xxxx ^[1]
1	1	0	1	1	1	1	6Fh	Reserved ^[2]	Reserved	Reserved
1	1	1	0	0	0	0	70h	Individual pin output port 0 configuration register	Read/write byte	0000 0000
1	1	1	0	0	0	1	71h	Individual pin output port 1 configuration register	Read/write byte	0000 0000
1	1	1	0	0	1	0	72h	Individual pin output port 2 configuration register	Read/write byte	0000 0000
1	1	1	0	0	1	1	73h	Reserved ^[2]	Reserved	Reserved
1	1	1	0	1	0	0	74h	Switch debounce enable 0	Read/write byte	0000 0000
1	1	1	0	1	0	1	75h	Switch debounce enable 1	Read/write byte	0000 0000
1	1	1	0	1	1	0	76h	Switch debounce count	Read/write byte	0000 0000
-	-	-	-	-	-	-	77h to 7Fh	Reserved ^[2]	Reserved	Reserved

[1] Undefined.

[2] These registers marked "reserved" should not be written, and the controller will not be acknowledged when accessed.

[3] Successive read and write accesses to remain at this register address.

6.4 Register descriptions

This section describes the PCAL9722 registers. It is further divided into the following subsections:

6.4.1 Input port registers (00h, 01h, 02h)

The input port registers (registers 00h, 01h, 02h) reflect the incoming logic levels of the pins. The input port registers are read only; writes to these registers have no effect. The default value 'X' is determined by the externally applied logic level. If a pin is configured as an output (registers 04h, 05h, 06h), the port value is equal to the actual voltage level on that pin. If the output is configured as open-drain (register 5Ch and registers 70h, 71h, 72h), the input port value is forced to 0. An input port register group read operation is performed as described in [Section 7.5](#).

After reading input port registers, all interrupts are cleared.

Table 7. Input port 0 register (address 00h)

Bit	7	6	5	4	3	2	1	0
Symbol	I0.7	I0.6	I0.5	I0.4	I0.3	I0.2	I0.1	I0.0
Default	X	X	X	X	X	X	X	X

Table 8. Input port 1 register (address 01h)

Bit	7	6	5	4	3	2	1	0
Symbol	I1.7	I1.6	I1.5	I1.4	I1.3	I1.2	I1.1	I1.0
Default	X	X	X	X	X	X	X	X

Table 9. Input port 2 register (address 02h)

Bit	7	6	5	4	3	2	1	0
Symbol	I2.7	I2.6	I2.5	I2.4	I2.3	I2.2	I2.1	I2.0
Default	0 (NA)	0 (NA)	X	X	X	X	X	X

6.4.2 Output port registers (04h, 05h, 06h)

The output port registers (registers 04h, 05h, 06h) show the outgoing logic levels of the pins defined as outputs by the configuration register. Bit values in these registers have no effect on pins defined as inputs. In turn, reads from these registers reflect the value that was written to these registers, **not** the actual pin value. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 10. Output port 0 register (address 04h)

Bit	7	6	5	4	3	2	1	0
Symbol	O0.7	O0.6	O0.5	O0.4	O0.3	O0.2	O0.1	O0.0
Default	1	1	1	1	1	1	1	1

Table 11. Output port 1 register (address 05h)

Bit	7	6	5	4	3	2	1	0
Symbol	O1.7	O1.6	O1.5	O1.4	O1.3	O1.2	O1.1	O1.0
Default	1	1	1	1	1	1	1	1

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 12. Output port 2 register (address 06h)

Bit	7	6	5	4	3	2	1	0
Symbol	O2.7	O2.6	O2.5	O2.4	O2.3	O2.2	O2.1	O2.0
Default	1 (NA)	1 (NA)	1	1	1	1	1	1

6.4.3 Polarity inversion registers (08h, 09h, 0Ah)

The polarity inversion registers (registers 08h, 09h, 0Ah) allow polarity inversion of pins defined as inputs by the configuration register. If a bit in these registers is set (written with '1'), the corresponding port pin's polarity is inverted in the input register. If a bit in this register is cleared (written with a '0'), the corresponding port pin's polarity is retained. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 13. Polarity inversion port 0 register (address 08h)

Bit	7	6	5	4	3	2	1	0
Symbol	N0.7	N0.6	N0.5	N0.4	N0.3	N0.2	N0.1	N0.0
Default	0	0	0	0	0	0	0	0

Table 14. Polarity inversion port 1 register (address 09h)

Bit	7	6	5	4	3	2	1	0
Symbol	N1.7	N1.6	N1.5	N1.4	N1.3	N1.2	N1.1	N1.0
Default	0	0	0	0	0	0	0	0

Table 15. Polarity inversion port 2 register (address 0Ah)

Bit	7	6	5	4	3	2	1	0
Symbol	N2.7	N2.6	N2.5	N2.4	N2.3	N2.2	N2.1	N2.0
Default	0 (NA)	0 (NA)	0	0	0	0	0	0

6.4.4 Configuration registers (0Ch, 0Dh, 0Eh)

The configuration registers (registers 0Ch, 0Dh, 0Eh) configure the direction of the I/O pins. If a bit in these registers is set to 1, the corresponding port pin is enabled as a high-impedance input. If a bit in these registers is cleared to 0, the corresponding port pin is enabled as an output. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 16. Configuration port 0 register (address 0Ch)

Bit	7	6	5	4	3	2	1	0
Symbol	C0.7	C0.6	C0.5	C0.4	C0.3	C0.2	C0.1	C0.0
Default	1	1	1	1	1	1	1	1

Table 17. Configuration port 1 register (address 0Dh)

Bit	7	6	5	4	3	2	1	0
Symbol	C1.7	C1.6	C1.5	C1.4	C1.3	C1.2	C1.1	C1.0

Table 17. Configuration port 1 register (address 0Dh)...continued

Bit	7	6	5	4	3	2	1	0
Default	1	1	1	1	1	1	1	1

Table 18. Configuration port 2 register (address 0Eh)

Bit	7	6	5	4	3	2	1	0
Symbol	C2.7	C2.6	C2.5	C2.4	C2.3	C2.2	C2.1	C2.0
Default	1 (NA)	1 (NA)	1	1	1	1	1	1

6.4.5 Output drive strength registers (40h, 41h, 42h, 43h, 44h, 45h)

The output drive strength registers control the output drive level of the GPIO. Each GPIO can be configured independently to a certain output current level by two register control bits. For example, register 41h CC0.7 (bits [7:6]) controls port 0.7 and register 41h CC0.6 (bits [5:4]) controls port 0.6. The output drive level of the GPIO is programmed: 00b = 0.25×, 01b = 0.5×, 10b = 0.75× or 11b = 1× of the drive capability of the I/O. For details, see [Section 8.1](#). [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 19. Current control port 0A register (address 40h)

Bit	7	6	5	4	3	2	1	0
Symbol	CC0.3		CC0.2		CC0.1		CC0.0	
Default	1	1	1	1	1	1	1	1

Table 20. Current control port 0B register (address 41h)

Bit	7	6	5	4	3	2	1	0
Symbol	CC0.7		CC0.6		CC0.5		CC0.4	
Default	1	1	1	1	1	1	1	1

Table 21. Current control port 1A register (address 42h)

Bit	7	6	5	4	3	2	1	0
Symbol	CC1.3		CC1.2		CC1.1		CC1.0	
Default	1	1	1	1	1	1	1	1

Table 22. Current control port 1B register (address 43h)

Bit	7	6	5	4	3	2	1	0
Symbol	CC1.7		CC1.6		CC1.5		CC1.4	
Default	1	1	1	1	1	1	1	1

Table 23. Current control port 2A register (address 44h)

Bit	7	6	5	4	3	2	1	0
Symbol	CC2.3		CC2.2		CC2.1		CC2.0	
Default	1	1	1	1	1	1	1	1

Table 24. Current control port 2B register (address 45h)

Bit	7	6	5	4	3	2	1	0
Symbol	CC2.7 (NA)		CC2.6 (NA)		CC2.5		CC2.4	
Default	1	1	1	1	1	1	1	1

6.4.6 Input latch registers (48h, 49h, 4Ah)

The input latch registers (registers 48h, 49h, 4Ah) enable and disable the input latch of the I/O pins. These registers are effective only when the pin is configured as an input port. When an input latch register bit is 0, the corresponding input pin state is not latched. A state change in the corresponding input pin generates an interrupt. A read of the input register clears the interrupt. If the input goes back to its initial logic state before the input port register is read, then the interrupt is cleared.

When an input latch register bit is 1, the corresponding input pin state is latched. A change of state of the input generates an interrupt and the input logic value is loaded into the corresponding bit of the input port register (registers 0, 1 and 2). A read of the input port register clears the interrupt. If the input pin returns to its initial logic state before the input port register is read, then the interrupt is not cleared and the corresponding bit of the input port register keeps the logic value that initiated the interrupt.

For example, if the P0_4 input was as logic 0 and the input goes to logic 1 then back to logic 0, the input port 0 register captures this change and an interrupt is generated (if unmasked). When the read is performed on the input port 0 register, the interrupt is cleared, assuming there were no additional inputs that have changed, and bit 4 of the input port 0 register reads '1'. The next read of the input port register bit 4 register should now read '0'.

An interrupt remains active when a non-latched input simultaneously switches state with a latched input and then returns to its original state. A read of the input register reflects only the change of state of the latched input and also clears the interrupt. The interrupt is cleared if the input latch register changes from latched to non-latched configuration and the I/O pins return to its original state.

If the input pin is changed from latched to non-latched input, a read from the input port register reflects the current port logic level. If the input pin is changed from non-latched to latched input, the read from the input register reflects the latched logic level. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 25. Input latch port 0 register (address 48h)

Bit	7	6	5	4	3	2	1	0
Symbol	L0.7	L0.6	L0.5	L0.4	L0.3	L0.2	L0.1	L0.0
Default	0	0	0	0	0	0	0	0

Table 26. Input latch port 1 register (address 49h)

Bit	7	6	5	4	3	2	1	0
Symbol	L1.7	L1.6	L1.5	L1.4	L1.3	L1.2	L1.1	L1.0

Table 26. Input latch port 1 register (address 49h)...continued

Bit	7	6	5	4	3	2	1	0
Default	0	0	0	0	0	0	0	0

Table 27. Input latch port 2 register (address 4Ah)

Bit	7	6	5	4	3	2	1	0
Symbol	L2.7	L2.6	L2.5	L2.4	L2.3	L2.2	L2.1	L2.0
Default	0 (NA)	0 (NA)	0	0	0	0	0	0

6.4.7 Pull-up/pull-down enable registers (4Ch, 4Dh, 4Eh)

The pull-up and pull-down enable registers allow the user to enable or disable pull-up/pull-down resistors on the I/O pins. Setting the bit to logic 1 enables the selection of pull-up/pull-down resistors. Setting the bit to logic 0 disconnects the pull-up/pull-down resistors from the I/O pins. Also, the resistors will be disconnected when the outputs are configured as open-drain outputs (see [Section 6.4.11](#) and [Section 6.4.15](#)). Use the pull-up/pull-down registers to select either a pull-up or pull-down resistor. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 28. Pull-up/pull-down enable port 0 register (address 4Ch)

Bit	7	6	5	4	3	2	1	0
Symbol	PE0.7	PE0.6	PE0.5	PE0.4	PE0.3	PE0.2	PE0.1	PE0.0
Default	0	0	0	0	0	0	0	0

Table 29. Pull-up/pull-down enable port 1 register (address 4Dh)

Bit	7	6	5	4	3	2	1	0
Symbol	PE1.7	PE1.6	PE1.5	PE1.4	PE1.3	PE1.2	PE1.1	PE1.0
Default	0	0	0	0	0	0	0	0

Table 30. Pull-up/pull-down enable port 2 register (address 4Eh)

Bit	7	6	5	4	3	2	1	0
Symbol	PE2.7	PE2.6	PE2.5	PE2.4	PE2.3	PE2.2	PE2.1	PE2.0
Default	0 (NA)	0 (NA)	0	0	0	0	0	0

6.4.8 Pull-up/pull-down selection registers (50h, 51h, 52h)

The I/O port can be configured to have a pull-up or pull-down resistor by programming the pull-up/pull-down selection register. Setting a bit to logic 1 selects a 100 kΩ pull-up resistor for that I/O pin. Setting a bit to logic 0 selects a 100 kΩ pull-down resistor for that I/O pin. If the pull-up/down feature is disconnected, writing to this register has no effect on the I/O pin. Typical value is 100 kΩ with minimum of 50 kΩ and maximum of 150 kΩ. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 31. Pull-up/pull-down selection port 0 register (address 50h)

Bit	7	6	5	4	3	2	1	0
Symbol	PUD0.7	PUD0.6	PUD0.5	PUD0.4	PUD0.3	PUD0.2	PUD0.1	PUD0.0
Default	1	1	1	1	1	1	1	1

Table 32. Pull-up/pull-down selection port 1 register (address 51h)

Bit	7	6	5	4	3	2	1	0
Symbol	PUD1.7	PUD1.6	PUD1.5	PUD1.4	PUD1.3	PUD1.2	PUD1.1	PUD1.0
Default	1	1	1	1	1	1	1	1

Table 33. Pull-up/pull-down selection port 2 register (address 52h)

Bit	7	6	5	4	3	2	1	0
Symbol	PUD2.7	PUD2.6	PUD2.5	PUD2.4	PUD2.3	PUD2.2	PUD2.1	PUD2.0
Default	1 (NA)	1 (NA)	1	1	1	1	1	1

6.4.9 Interrupt mask registers (54h, 55h, 56h)

Interrupt mask registers are set to logic 1 upon power-on, disabling interrupts during system start-up. Interrupts can be enabled by setting the corresponding mask bits to logic 0.

If an input changes state and the corresponding bit in the interrupt mask register is set to 1, the interrupt is masked and the interrupt pin will not be asserted. If the corresponding bit in the Interrupt mask register is set to 0, the interrupt pin is asserted.

When an input changes state and the resulting interrupt is masked (interrupt mask bit is 1), setting the input mask register bit to 0 will cause the interrupt pin to be asserted. If the interrupt mask bit of an input that is the source of an interrupt is set to 1, the interrupt pin is de-asserted. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 34. Interrupt mask port 0 register (address 54h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	M0.7	M0.6	M0.5	M0.4	M0.3	M0.2	M0.1	M0.0
Default	1	1	1	1	1	1	1	1

Table 35. Interrupt mask port 1 register (address 55h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	M1.7	M1.6	M1.5	M1.4	M1.3	M1.2	M1.1	M1.0
Default	1	1	1	1	1	1	1	1

Table 36. Interrupt mask port 2 register (address 56h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	M2.7	M2.6	M2.5	M2.4	M2.3	M2.2	M2.1	M2.0

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 36. Interrupt mask port 2 register (address 56h) bit description...continued

Bit	7	6	5	4	3	2	1	0
Default	1 (NA)	1 (NA)	1	1	1	1	1	1

6.4.10 Interrupt status registers (58h, 59h, 5Ah)

The read-only interrupt status registers are used to identify the source of an interrupt. When read, a logic 1 indicates that the corresponding input pin was the source of the interrupt. A logic 0 indicates that the input pin is not the source of an interrupt.

When a corresponding bit in the interrupt mask register is set to 1 (masked), the interrupt status bit will return logic 0. [Section 7.5](#) describes the register group read operation.

Table 37. Interrupt status port 0 register (address 58h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	S0.7	S0.6	S0.5	S0.4	S0.3	S0.2	S0.1	S0.0
Default	0	0	0	0	0	0	0	0

Table 38. Interrupt status port 1 register (address 59h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	S1.7	S1.6	S1.5	S1.4	S1.3	S1.2	S1.1	S1.0
Default	0	0	0	0	0	0	0	0

Table 39. Interrupt status port 2 register (address 5Ah) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	S2.7	S2.6	S2.5	S2.4	S2.3	S2.2	S2.1	S2.0
Default	0 (NA)	0 (NA)	0	0	0	0	0	0

6.4.11 Output port configuration register (5Ch)

The output port configuration register selects a port-wise push-pull or open-drain I/O stage. A logic 0 configures the I/O as push-pull (Q1 and Q2 are active, see [Figure 5](#)). A logic 1 configures the I/O as open-drain (Q1 is disabled, Q2 is active) and the recommended command sequence is to program this register (5Ch) before the configuration register (0Ch, 0Dh, 0Eh) sets the port pins as outputs.

ODEN0 configures port 0_x, ODEN1 configures port 1_x, and ODEN2 configures port 2_x.

Individual pins may be programmed as open-drain or push-pull by programming individual pin output configuration registers (70h, 71h, 72h). For details, see [Section 6.4.15](#).

A register group read or write operation is not allowed on this register. Successive read or write accesses remain at this register address.

Table 40. Output port configuration register (address 5Ch)

Bit	7	6	5	4	3	2	1	0
Symbol	Reserved					ODEN2	ODEN1	ODEN0
Default	0	0	0	0	0	0	0	0

6.4.12 Interrupt edge registers (60h, 61h, 62h and 63h, 64h, 65h)

The interrupt edge registers determine what action on an input pin causes an interrupt along with the interrupt mask registers (54h, 55h, and 56h). If the Interrupt is enabled (set '0' in the mask register) and the action at the corresponding pin matches the required activity, the $\overline{\text{INT}}$ output becomes active. The default value for each pin is 00b or level triggered, meaning a level change on the pin will cause an interrupt event. A level triggered action means a change in logic state (HIGH-to-LOW or LOW-to-HIGH), since the last read of the Input port (00h, 01h, or 02h) which can be latched with a corresponding '1' set in the input latch register (48h, 49h, 4Ah). If the Interrupt edge register entry is set to 11b, any edge, positive or negative going, causes an interrupt event. If an entry is 01b, only a positive-going edge causes an interrupt event, while a 10b requires a negative-going edge to cause an interrupt event. These edge interrupt events are latched, regardless of the status of the input latch register (48h, 49h, 4Ah). These edged interrupts can be cleared in several ways: reading input port registers (00h, 01h, 02h); setting the interrupt mask register (54h, 55h, 56h) to 1 (masked); setting the interrupt clear register (68h, 69h, 6Ah) to 1 (this is a write-only register); resetting the interrupt edge register (60h to 65h) back to 0. [Section 7.3](#) describes a register group write and [Section 7.5](#) describes a register group read.

Table 41. Interrupt edge port 0A register (address 60h)

Bit	7	6	5	4	3	2	1	0
Symbol	IE0.3		IE0.2		IE0.1		IE0.0	
Default	0	0	0	0	0	0	0	0

Table 42. Interrupt edge port 0B register (address 61h)

Bit	7	6	5	4	3	2	1	0
Symbol	IE0.7		IE0.6		IE0.5		IE0.4	
Default	0	0	0	0	0	0	0	0

Table 43. Interrupt edge port 1A register (address 62h)

Bit	7	6	5	4	3	2	1	0
Symbol	IE1.3		IE1.2		IE1.1		IE1.0	
Default	0	0	0	0	0	0	0	0

Table 44. Interrupt edge port 1B register (address 63h)

Bit	7	6	5	4	3	2	1	0
Symbol	IE1.7		IE1.6		IE1.5		IE1.4	
Default	0	0	0	0	0	0	0	0

Table 45. Interrupt edge port 2A register (address 64h)

Bit	7	6	5	4	3	2	1	0
Symbol	IE2.3		IE2.2		IE2.1		IE2.0	
Default	0	0	0	0	0	0	0	0

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 46. Interrupt edge port 2B register (address 65h)

Bit	7	6	5	4	3	2	1	0
Symbol	IE2.7 (NA)		IE2.6 (NA)		IE2.5		IE2.4	
Default	0	0	0	0	0	0	0	0

Table 47. Interrupt edge bits (IEEx.x)

Bit 1	Bit 0	Description
0	0	Level-triggered interrupt
0	1	Positive-going (rising) edge triggered interrupt
1	0	Negative-going (falling) edge triggered interrupt
1	1	Any edge (positive or negative-going) triggered interrupt

6.4.13 Interrupt clear registers (68h, 69h, 6Ah)

The write-only interrupt clear registers clear the individual interrupt sources (status bit). Setting an individual bit or any combination of bits to logic 1 resets the corresponding interrupt source, so if that source was the only event causing an interrupt, the INT is cleared. After writing a logic 1, the bit returns to logic 0. [Section 7.3](#) describes the register group write operation.

Table 48. Interrupt clear port 0 register (address 68h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	IC0.7	IC0.6	IC0.5	IC0.4	IC0.3	IC0.2	IC0.1	IC0.0
Default	0	0	0	0	0	0	0	0

Table 49. Interrupt clear port 1 register (address 69h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	IC1.7	IC1.6	IC1.5	IC1.4	IC1.3	IC1.2	IC1.1	IC1.0
Default	0	0	0	0	0	0	0	0

Table 50. Interrupt clear port 2 register (address 6Ah) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	IC2.7	IC2.6	IC2.5	IC2.4	IC2.3	IC2.2	IC2.1	IC2.0
Default	0 (NA)	0 (NA)	0	0	0	0	0	0

6.4.14 Input status registers (6Ch, 6Dh, 6Eh)

The read-only input status registers function exactly like input port 0, 1 and 2 (00h, 01h, 02h) without resetting the interrupt logic. This allows inspection of the actual state of the input pins without upsetting internal logic. If the pin is configured as an input, the port read is unaffected by input latch logic or other features, the state of the register is simply a reflection of the current state of the input pins. If a pin is configured as an output by the configuration register (0Ch, 0Dh, 0Eh), and is also configured as open-drain (register 5Ch and 70h, 71h, 72h),

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

the read for that pin will always return 0, otherwise that state of that pin is returned. [Section 7.5](#) describes the register group read operation.

Table 51. Input status port 0 register (address 6Ch) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	II0.7	II0.6	II0.5	II0.4	II0.3	II0.2	II0.1	II0.0
Default	X	X	X	X	X	X	X	X

Table 52. Input status port 1 register (address 6Dh) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	II1.7	II1.6	II1.5	II1.4	II1.3	II1.2	II1.1	II1.0
Default	X	X	X	X	X	X	X	X

Table 53. Input status port 2 register (address 6Eh) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	II2.7	II2.6	II2.5	II2.4	II2.3	II2.2	II2.1	II2.0
Default	0 (NA)	0 (NA)	X	X	X	X	X	X

6.4.15 Individual pin output configuration registers (70h, 71h, 72h)

The individual pin output configuration registers modify the output configuration (push-pull or open-drain) set by the output port configuration register (5Ch).

If the ODENx bit is set at logic 0 (push-pull), any bit set to logic 1 in the IOCRx register reverses the output state of that pin only to open-drain. When the ODENx bit is set at logic 1 (open-drain), a logic 1 in IOCRx sets that pin to push-pull.

The recommended command sequence to program the output pin is to program ODENx (5Ch), the IOCRx, and finally the configuration register (0Ch, 0Dh, 0Eh) to set the pins as outputs. [Section 7.3](#) describes a register group write operation and [Section 7.5](#) describes a register group read operation.

Table 54. Individual pin output configuration register 0 (address 70h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	IOCR0.7	IOCR0.6	IOCR0.5	IOCR0.4	IOCR0.3	IOCR0.2	IOCR0.1	IOCR0.0
Default	0	0	0	0	0	0	0	0

Table 55. Individual pin output configuration register 1 (address 71h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	IOCR1.7	IOCR1.6	IOCR1.5	IOCR1.4	IOCR1.3	IOCR1.2	IOCR1.1	IOCR1.0
Default	0	0	0	0	0	0	0	0

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 56. Individual pin output configuration register 2 (address 72h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	IOCR2.7	IOCR2.6	IOCR2.5	IOCR2.4	IOCR2.3	IOCR2.2	IOCR2.1	IOCR2.0
Default	0 (NA)	0 (NA)	0	0	0	0	0	0

6.4.16 Switch debounce enable registers (74h, 75h)

The switch debounce enable registers enable the switch debounce function for port 0 and port 1 pins. If a pin on port 0 or port 1 is designated as an input, logic 1 in the switch debounce enable register connects the debounce logic to that pin. If a pin is assigned as an output (via configuration port 0 or port 1 register), the debounce logic is not connected to that pin, and it functions as a normal output. The switch debounce logic requires an oscillator time base input and if this function is used, P0_0 is designated as the oscillator input. If P0_0 is not configured as input and if SD0.0 is not set to logic 1, the switch debounce logic is not connected to any pin. For details on switch debounce logic functionality, see [Section 6.9](#).

Table 57. Switch debounce enable port 0 register (address 74h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	SD0.7	SD0.6	SD0.5	SD0.4	SD0.3	SD0.2	SD0.1	SD0.0
Default	0	0	0	0	0	0	0	0

Table 58. Switch debounce enable port 1 register (address 75h) bit description

Bit	7	6	5	4	3	2	1	0
Symbol	SD1.7	SD1.6	SD1.5	SD1.4	SD1.3	SD1.2	SD1.1	SD1.0
Default	0	0	0	0	0	0	0	0

6.4.17 Switch debounce count register (76h)

The switch debounce count register is used to count the debounce time that the switch debounce logic uses to determine if a switch connected to one of the port 0 or port 1 pins finally stays open (logic 1) or closed (logic 0). This number, together with the oscillator frequency supplied to P0_0, determines the debounce time (for example, the debounce time will be 10 μ s if this register is set to 0Ah and external oscillator frequency is 1 MHz). For details, see [Section 6.9](#).

Table 59. Switch debounce count register (address 76h) bit description ^[1]

Bit	7	6	5	4	3	2	1	0
Symbol	SDC0.7	SDC0.6	SDC0.5	SDC0.4	SDC0.3	SDC0.2	SDC0.1	SDC0.0
Default	0	0	0	0	0	0	0	0

[1] The switch debounce logic is disabled if this register is set to 00h.

6.5 I/O port

When an I/O is configured as an input, FETs Q1 and Q2 are off, which creates a high-impedance input. The input voltage may be raised above $V_{DD(P)}$ to a maximum of 5.5 V.

If the I/O is configured as an output, Q1 or Q2 is enabled, depending on the state of the output port register. In this case, there are low-impedance paths between the I/O pin and either $V_{DD(P)}$ or V_{SS} . The external voltage applied to this I/O pin should not exceed the recommended levels for proper operation.

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

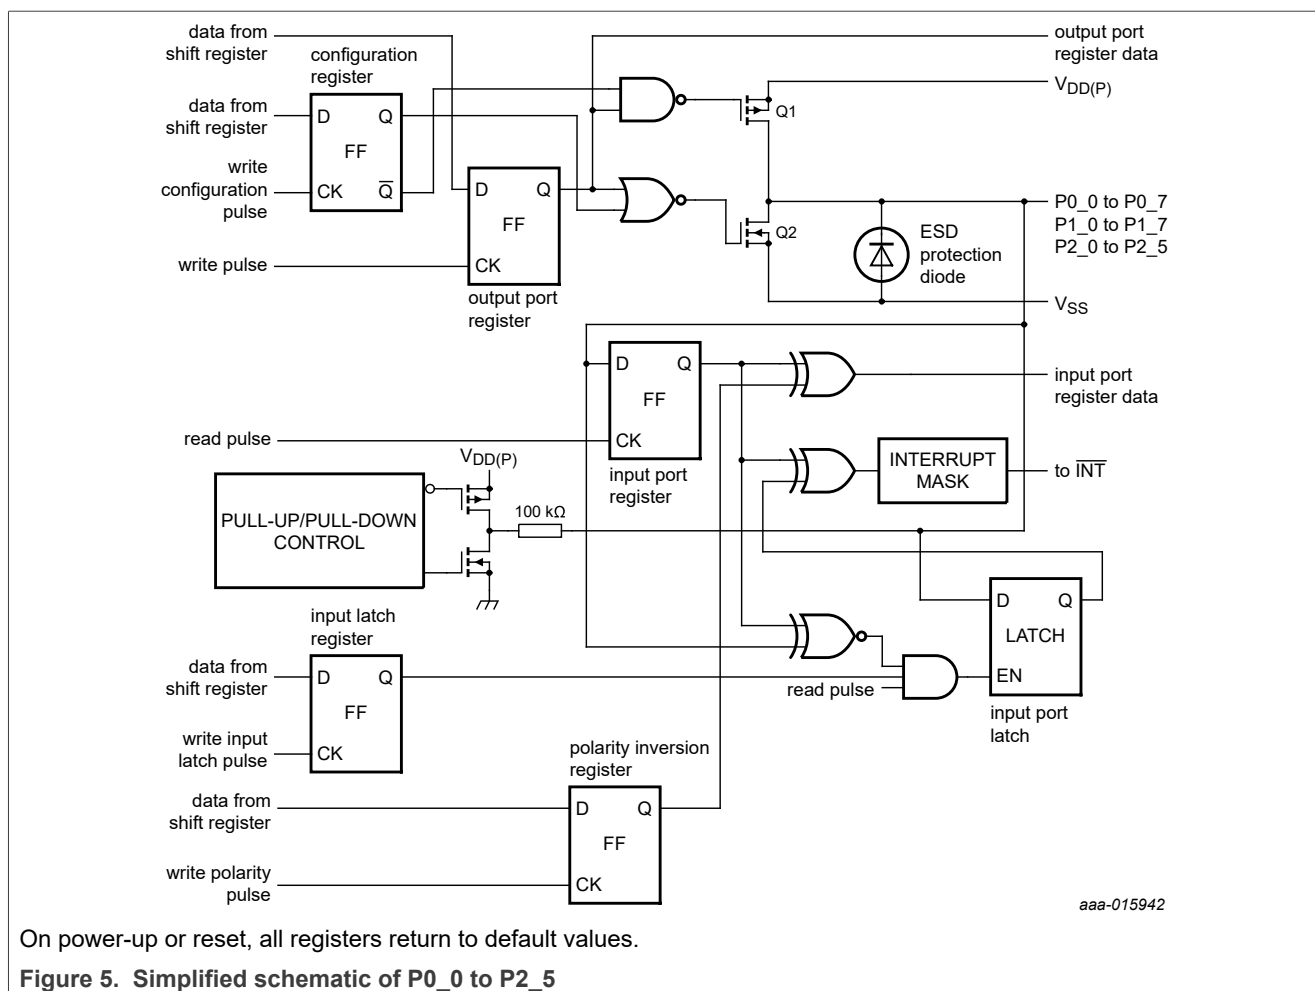


Figure 5. Simplified schematic of P0 0 to P2 5

6.6 Power-on reset

When power (from 0 V) is applied to $V_{DD(P)}$, an internal power-on reset holds the PCAL9722 in a reset condition until $V_{DD(P)}$ has reached V_{POR} . At that time, the reset condition is released and the PCAL9722 registers and SPI bus state machine initializes to their default states. After that, $V_{DD(P)}$ must be lowered to below V_{POR} and back up to the operating voltage for a power-reset cycle. For details, see [Section 8.2](#).

6.7 Reset input (RESET)

The **RESET** input can be asserted to initialize the system while keeping the $V_{DD(P)}$ at its operating level. A reset can be accomplished by holding the **RESET** pin LOW for a minimum of $t_{W(rst)}$. The PCAL9722 registers and SPI bus state machine are changed to their default state once **RESET** is LOW (0). When **RESET** is HIGH (1), the I/O levels at the P port can be changed externally or through the controller. This input requires a pull-up resistor to $V_{DD(SPI)}$ if no active connection is used.

6.8 Interrupt output (INT)

The INT output has an open-drain structure and requires a pull-up resistor to $V_{DD(P)}$ or $V_{DD(SPI)}$ depending on the application. When any current input port state differs from its corresponding input port register state, the interrupt output pin is asserted (logic 0) to indicate the system controller (MCU) that one of the input port states has changed. A pin configured as an output cannot cause an interrupt. Changing an I/O from an output to an

input can cause a false interrupt to occur if the state of the pin does not match the contents of the input port register.

To enable the interrupt output, the following three conditions must be satisfied:

- The GPIO must be configured as an input port by writing "1" to configuration port registers (0Ch, 0Dh, 0Eh)
- The interrupt mask registers (54h, 55h, 56h) must be set to "0" to unmask interrupt sources.
- The interrupt edge registers (60h to 65h) select what action on each input pin causes an interrupt; there are four different interrupt trigger modes: level trigger, rising-edge trigger, falling-edge trigger, or any edge trigger.

The input latch registers (48h, 49h, 4Ah) control each input pin either to enable latched input state or non-latched input state. When the input pin is set to latch state, it will hold or latch the input pin state (keep the logic value) and generate an interrupt until the controller can service the interrupt. This minimizes the host's interrupt service response for fast moving inputs.

Any interrupt status bit can be cleared and $\overline{\text{INT}}$ pin de-asserted by using one of the following methods and conditions:

- Power-on reset (POR), hardware reset from $\overline{\text{RESET}}$ pin
- Read input port registers (00h, 01h, 02h)
- Write logic 1 to interrupt clear registers (68h, 69h, 6Ah)
- Write logic 1 to interrupt mask registers (54h, 55h, 56h)
- Write logic 0 to configuration registers (0Ch, 0Dh, 0Eh), set pin as output port.
- Input pin goes back to its initial state in level trigger and non-latch mode
- Input pin goes back to its initial state in level trigger. Change latch to non-latch mode.
- Change the interrupt trigger mode from level trigger to edge trigger or vice versa in interrupt edge registers


When using the input latch feature, the input pin state is latched. The interrupt is de-asserted only when data is read from the port that generated the interrupt. The interrupt reset occurs when $\overline{\text{CS}}$ is de-asserted (from LOW to HIGH). Any change of the inputs after resetting is detected and is transmitted as $\overline{\text{INT}}$.

6.9 Switch debounce circuitry

Mechanical switches do not make clean make-or-break connections. The contacts can 'bounce' for a significant period before settling into a steady-state condition. This situation can confuse fast processors and make the physical interface difficult to design and the software interface difficult to make reliable.


The PCAL9722 implements hardware to ease the hardware interface by debouncing switch closures with dedicated circuitry. P0_1 to P0_7, P1_0 to P1_7 can connect to this debounce hardware on a pin-by-pin basis. These switch debouncers remove bounce when a switch opens or closes by requiring that sequentially clocked inputs remain in the same state for several sampling periods. The output does not change until the input is stable for a programmable duration. The circuit block diagram ([Figure 7](#)) shows the functional blocks consisting of an external oscillator, counter, edge detector, and D flip-flop. When the switch input state changes, the edge detector resets the counter. When the switch input state is stable for the full qualification period, the counter clocks the flip-flop, updating the output. [Figure 8](#) shows the typical opening and closing switch debounce operation timing.

To use the debounce circuitry, set the port pins (P0_1 to P0_7, and P1_0 to P1_7) with switches attached in the switch debounce enable 0 and 1 registers (74h, 75h). Connect an external oscillator signal on P0_0, which serves as a time base to the debounce timer. Finally, set a delay time in the switch debounce count register (76h). The combination of the time base of the external oscillator and the debounce count sets the qualification debounce period or t_{DP} in [Figure 8](#). All debounce counters use the same time base and count, but they all function independently.

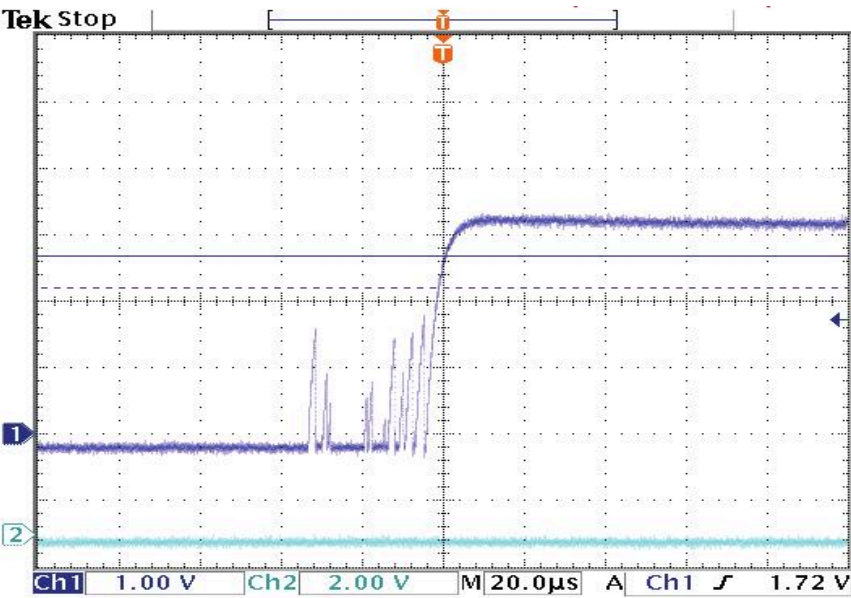

aaa-042212

Figure 6. Switch contact bounce

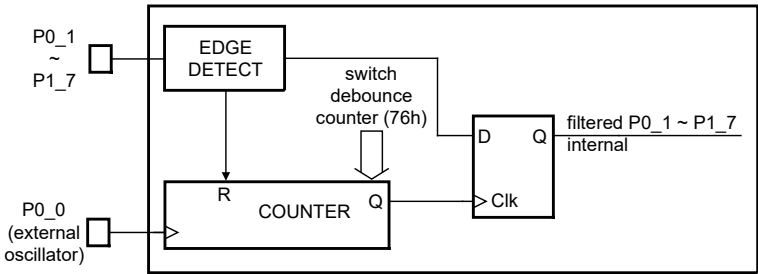


aaa-009086

When the external clock connects for the first time, it is required to wait 9 clock cycles for the debounce circuit in normal operation.

Figure 7. Debouncer block diagram

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

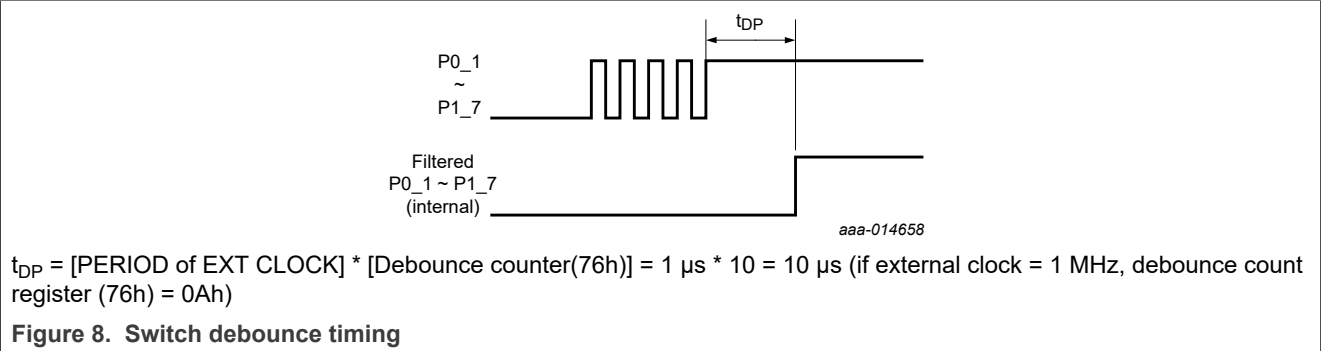

7 Characteristics of the 4-wire SPI serial-bus interface

The PCAL9722 communicates through an addressable SPI-compatible 4-wire serial bidirectional interface (read or write). The interface has three inputs and one output: serial clock (SCLK), active LOW chip select (/CS), serial data in (SDIN) and serial data out (SDOUT). /CS must be low to clock data into the device, and SDIN must be stable when sampled on the rising edge of SCLK. The PCAL9722 will ignore all activity on SCLK and SDIN except when /CS is low.

7.1 SPI-compatible 4-wire serial interface signals

- CS:** The active LOW chip select line is used to activate and access the SPI targets. As long as CS is HIGH, all targets ignore the clock and data inputs, and the data output is in a high impedance state. Whenever this pin is in a logic LOW state, data can be transferred between the controller and all targets.
- SCLK:** A serial clock is provided by the SPI controller and determines the speed of the data transfer. All receiving and sending data are done synchronously (clock the internal SPI shift register and the output driver) to this clock. It should be in its idle state (low) when CS is de-asserted (HIGH).
- SDIN:** Serial data in is sampled on the rising edge of SCLK into the internal shift registers when CS is asserted (LOW). The device ignores all activity on SDIN when CS is de-asserted.
- SDOUT:** Serial data out is the pin on which the internal shift registers data is shifted out serially. SDOUT is in a high-impedance state until the CS pin goes to a logic LOW state. New data appears at the SDOUT pin following the falling edge of SCLK during the read cycle.

This SPI-compatible 4-wire serial interface allows multiple targets to be connected to the same CS. Each target is identified using a unique target address from the ADDR input pin for the address encoding up to two possible target addresses.

7.2 Data format

- SDIN data input for write: at least 24 bits or [16 + (N*8)] bits (N is the number of data byte to write; N ≥ 1)
 - SDOUT data output for read: data bytes start read back after the first two bytes (target address byte and register address byte)
 - Clock frequency: up to 5 MHz
- The first 7-bit assigns the target address. Only two target addresses are available (either 40h (ADDR=0) or 42h (ADDR=1)). The 8th bit is to indicate either write (R/W=0) or read (R/W=1) operation. The register address (00h - 76h) on the serial map is specified by the next byte. The third byte transfers the data to the address specified by the register address written by the second byte. If the data continues ahead, the register address is automatically incremented for the fourth and subsequent bytes. As a result, it is possible to send the data continuously from the specified address. Data of less than one byte is ignored.

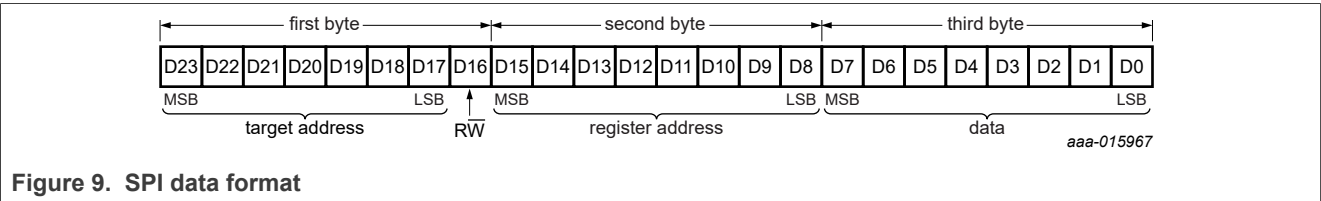


Figure 9. SPI data format

7.3 Write access sequence

In write operation, when 24 SCLK clock signals are input during the low period of /CS, the SDIN is taken in at the rising edge of SCLK. If the number of SCLK clock signals during the low period of /CS is 23 or less, the

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset


SDIN is not taken in. If it is 25 or more, the register address is automatically incremented every time 1 byte is taken in.

Register write sequences always begin from the bus idle condition. The bus idle condition refers to the /CS being high and the SCLK being low.

The registers are written using the following write sequence for one byte of data (from a bus idle condition):

1. Drive $\overline{\text{CS}}$ low. This operation enables the internal shift register.
2. Shift 24 bits of data into the device in an MSB first fashion. Data must be stable during the rising edge of SCLK.
3. The first 7-bit is set for the target address and the 8th bit of the first byte data must be a '0' indicating that it is a write-only transfer.
4. The second 8 bits of data should be the address of the register that is intended to write.
5. After the last bit of data is transferred, drive SCLK low if there is no more data to be transferred.
6. De-assert $\overline{\text{CS}}$ (drive it high) to end of write cycle.


If fewer than 24 bits of data are transferred before de-asserting /CS, then the data is ignored and the register is not updated. The write transfer format is shown in the [Figure 10](#) below.

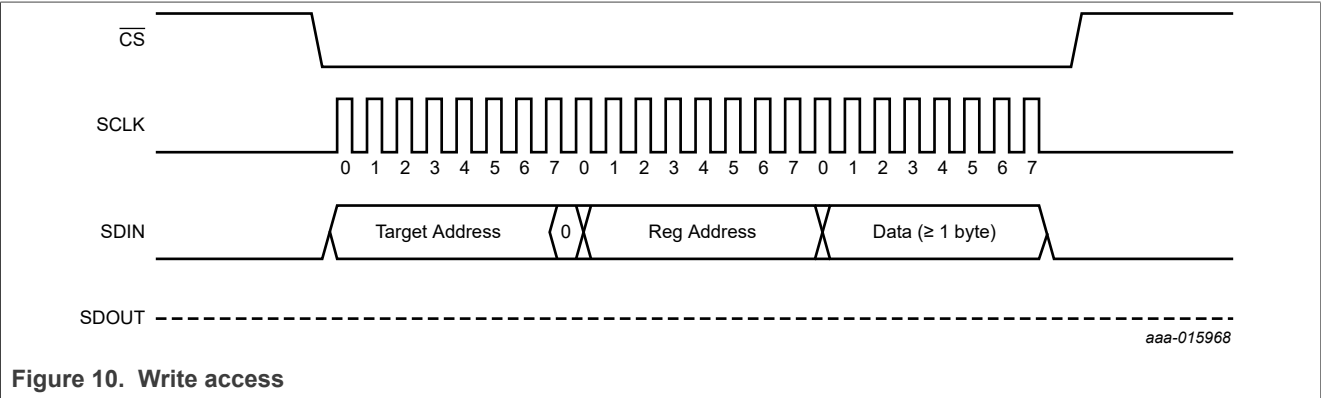

If more than 24 bits of data are transferred, that is, there are more than 24 clock pulses before de-asserting the /CS, the register address is auto incremented. Auto increment is discussed in a section below.

7.4 Auto increment


The auto-increment bit is set (AI = 1; MSB bit) in the register address (the second byte). The register address is incremented sequentially from the register which is indicated by the seven low-order bits in the pointer register. Once the last address (76h) in the register map is reached, the address is rolled over to the first address (00h) and previously written data is overwritten.

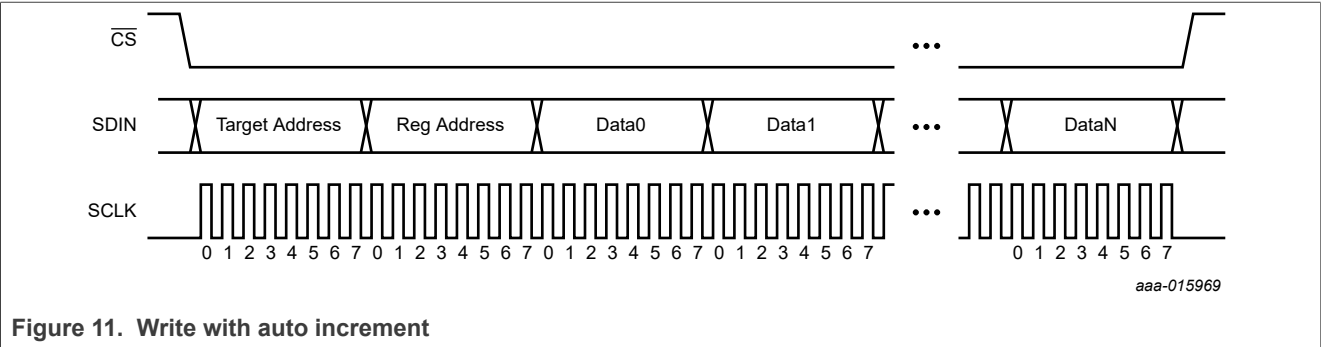

7.5 Read Access Sequence


In read operation, the registers are read using the following read sequence (from a bus idle condition) as shown in Figure 12.

1. Drive \overline{CS} low. This operation enables the internal shift register.
2. Shift 24 bits of data into the device in an MSB first fashion. Data must be stable during the rising edge of SCLK
3. The first 7-bit is set for the target address and the 8th bit of the first byte data must be a '1' indicating that it is a read-only transfer.
4. The second 8 bits of data should be the address of the register that is intended to read.
5. The third data byte is NOP (no operation) which is a dummy data byte (don't care).
6. The read data is shifted out on SDOUT starting from dummy data byte when SCLK is continuously running from SPI controller.
7. After the last bit of data is transferred, drive SCLK low if there is no more data to be transferred.
8. De-assert \overline{CS} (drive it high) to end of read cycle.

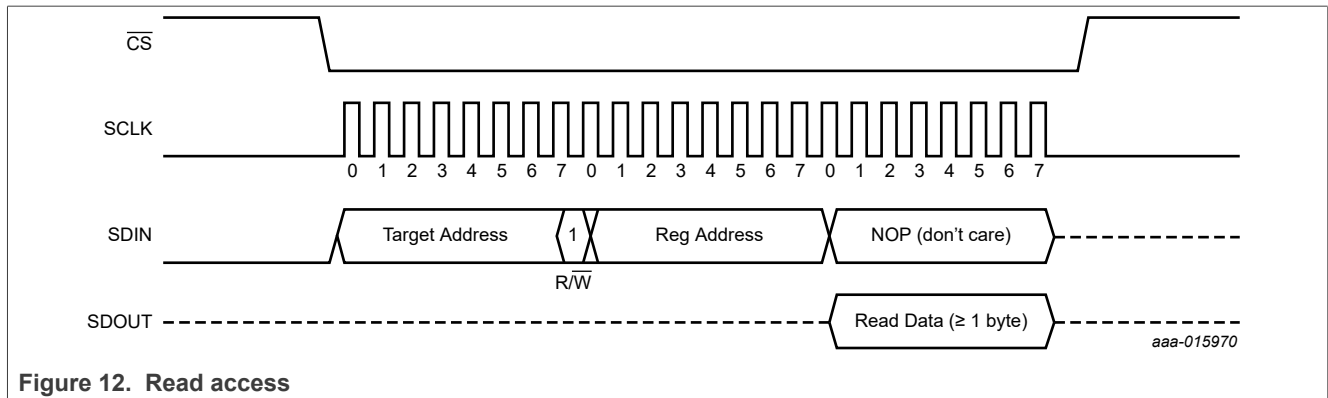


7.6 System configuration

A device generating a message is a 'transmitter'. A device receiving the message is the 'receiver'. The device that controls the message is the 'controller' and the devices that the controller controls are the 'targets'. As shown in Figure 13, two PCAL9722 target devices can be interfaced to a common SPI bus by connecting SDIN inputs, SCLK inputs, \overline{CS} inputs, and SDOUT outputs together to a micro-controller controller device. Each PCAL9722 device has an address selection input pin ADDR to set the target address.

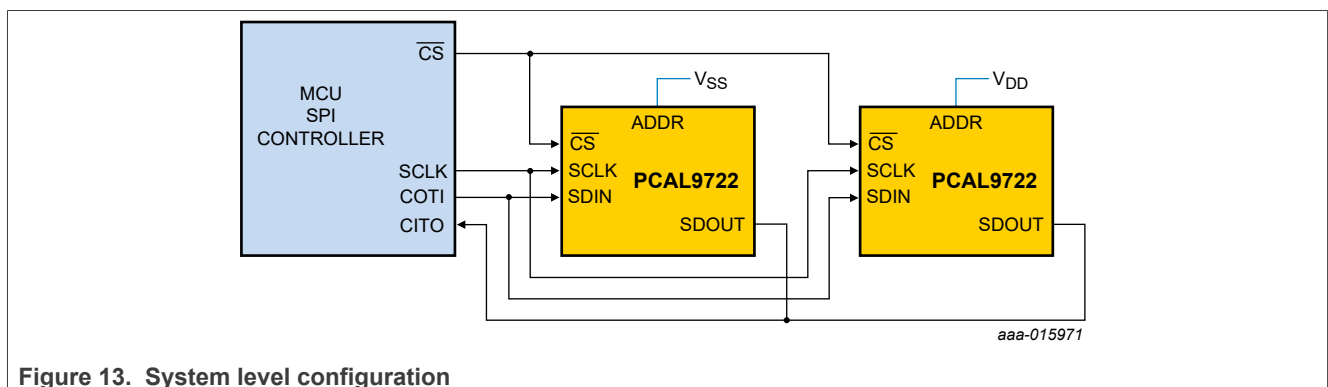

8 Application design-in information

Figure 14 shows a typical application of PCAL9722.

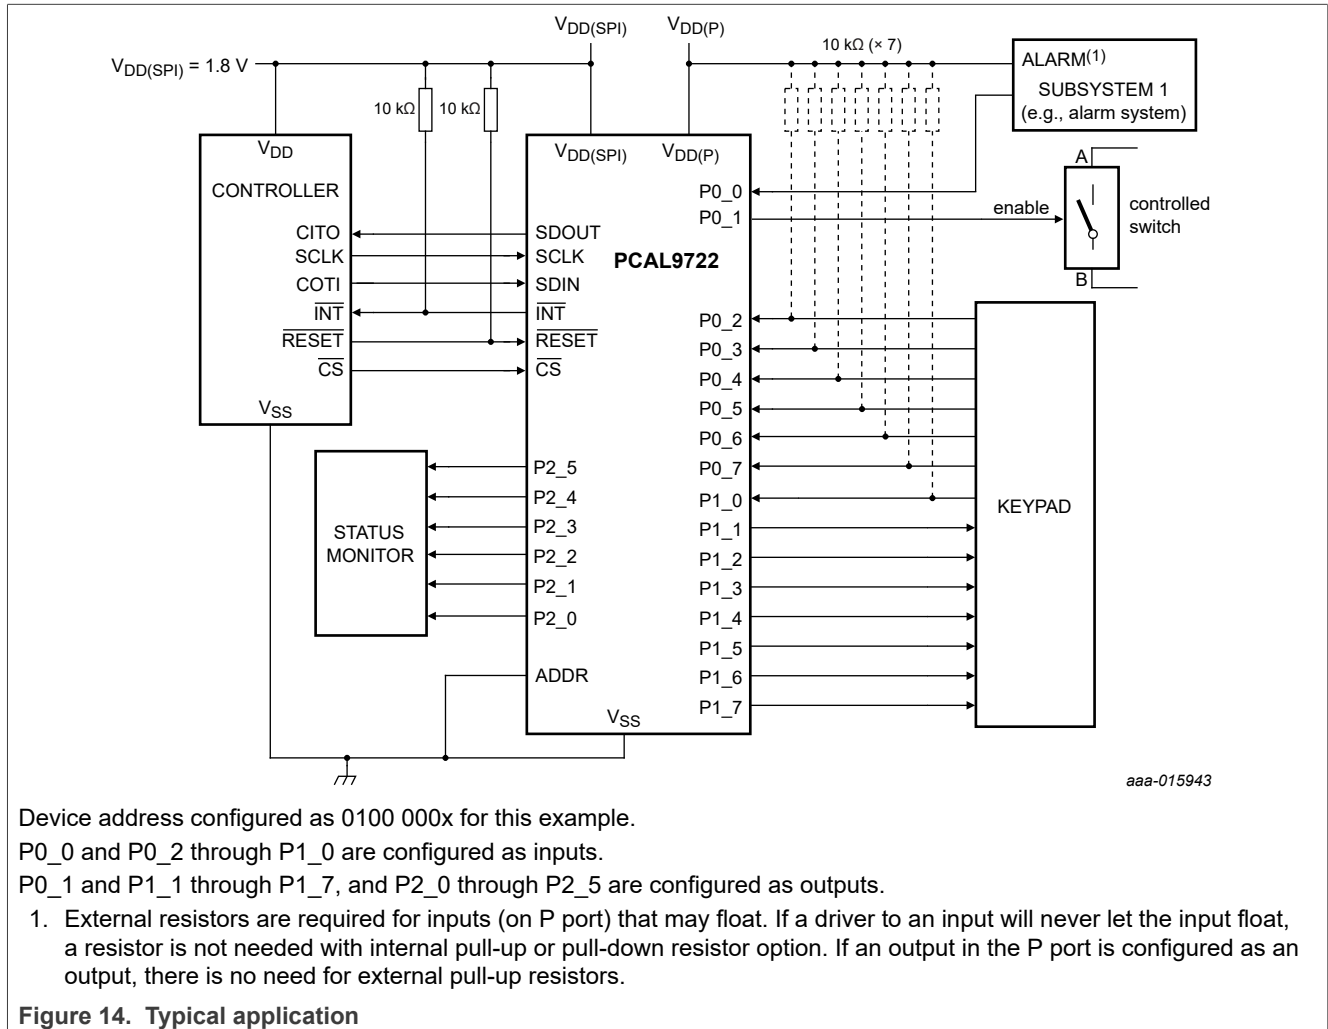


8.1 Output drive strength control

The output drive strength registers allow the user to control the output drive level of the GPIO. Each GPIO can be configured independently to one of the four possible output current levels. By programming these bits, the user is changing the number of transistor pairs or 'fingers' that drive the I/O pad.

Figure 15 shows a simplified output stage. The behavior of the pad is affected by the configuration register, the output port data, and the current control register. When the current control register bits are programmed to 01b, then only two of the fingers are active, reducing the current drive capability by 50 %.

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

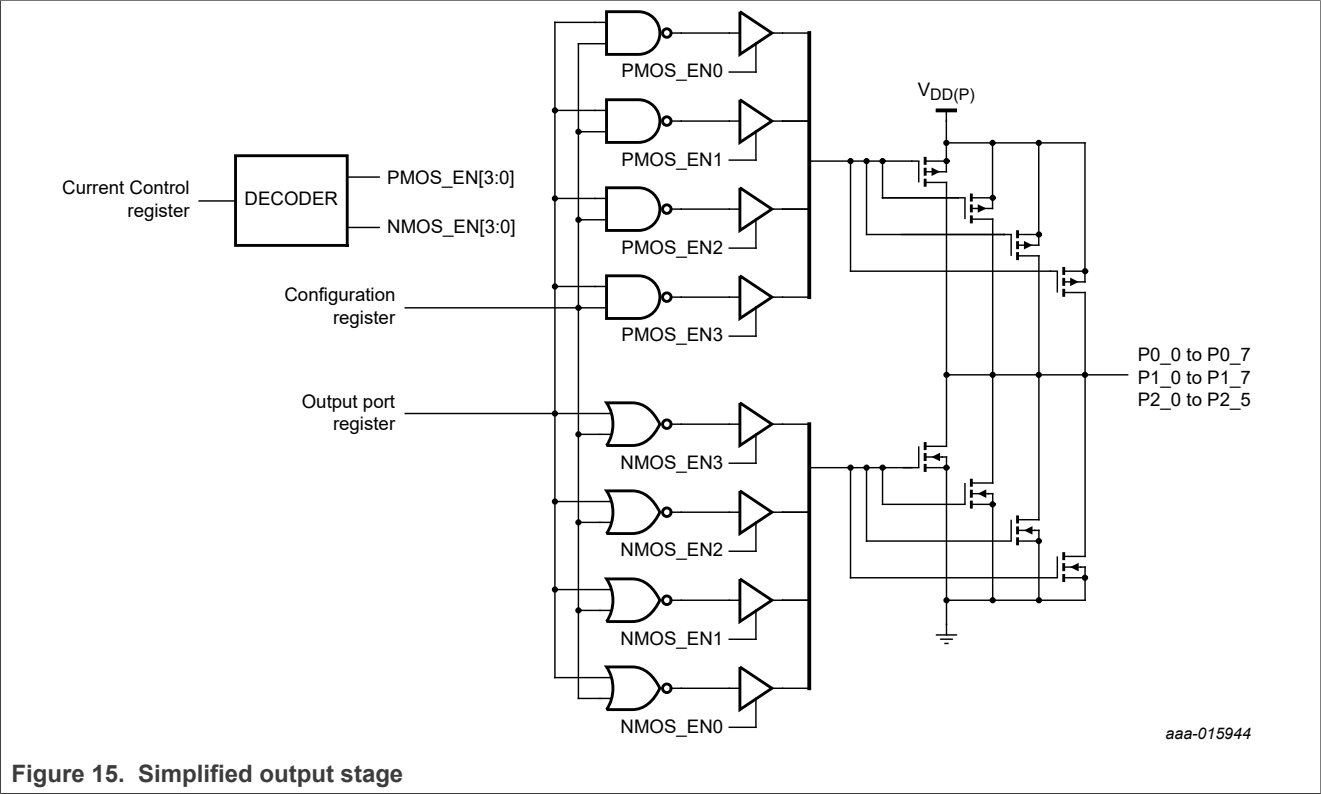


Reducing the current drive capability may be desirable to reduce system noise. When the output switches (transitions from H/L), there is a peak current that is a function of the output drive selection. This peak current runs through V_{DD} and V_{SS} package inductance and will create noise (some radiated, but more critically simultaneous switching noise (SSN)). In other words, switching many outputs at the same time will create ground and supply noise. The output drive strength control through the output drive strength registers allows the user to mitigate SSN issues without the need of additional external components.

8.2 Power-on reset requirements

In the event of a glitch or data corruption, PCAL9722 can be reset to its default conditions by using the power-on reset feature. Power-on reset requires that the device go through a power cycle to be completely reset. This reset also happens when the device is powered on for the first time in an application.

The two types of power-on reset are shown in [Figure 16](#) and [Figure 17](#).

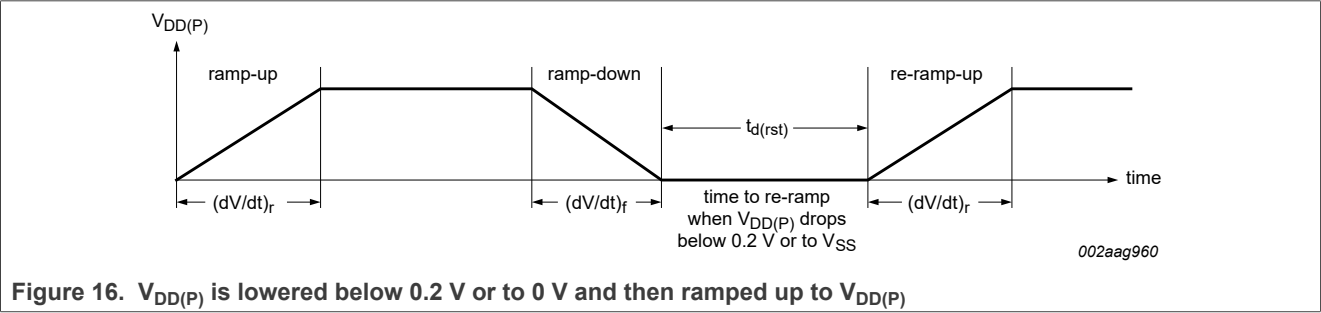

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

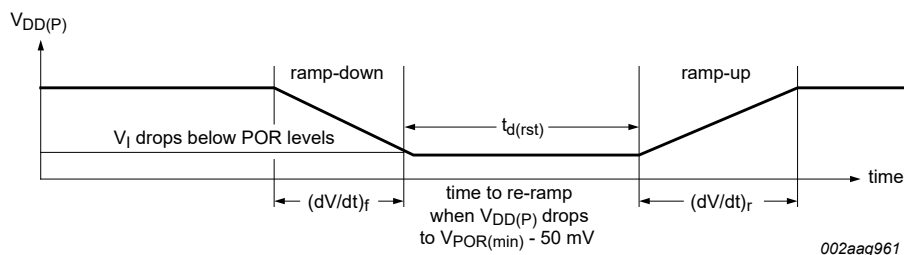


Figure 17. $V_{DD(P)}$ is lowered below the POR threshold, then ramped back up to $V_{DD(P)}$

Table 60 specifies the performance of the power-on reset feature for PCAL9722 for both types of power-on reset.

Table 60. Recommended supply sequencing and ramp rates

$T_{amb} = 25\text{ }^{\circ}\text{C}$ (unless otherwise noted). Not tested; specified by design.

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$(dV/dt)_f$	Fall rate of change of voltage	Figure 16	0.1	-	2000	ms
$(dV/dt)_r$	Rise rate of change of voltage	Figure 16	0.1	-	2000	ms
$t_{d(rst)}$	Reset delay time	Figure 16; re-ramp time when $V_{DD(P)}$ drops below 0.2 V or to V_{SS}	1	-	-	μs
		Figure 17; re-ramp time when $V_{DD(P)}$ drops to $V_{POR(min)} - 50\text{ mV}$	1	-	-	μs
$\Delta V_{DD(gl)}$	Glitch supply voltage difference	Figure 18	[1]	-	1.0	V
$t_{w(gl)VDD}$	Supply voltage glitch pulse width	Figure 18	[2]	-	10	μs
$V_{POR(trip)}$	Power-on reset trip voltage	Falling $V_{DD(P)}$	0.7	-	-	V
		Rising $V_{DD(P)}$	-	-	1.5	V

[1] Level that $V_{DD(P)}$ can glitch down to with a ramp rate at $0.4\text{ }\mu\text{s/V}$, but not cause a functional disruption when $t_{w(gl)VDD} < 1\text{ }\mu\text{s}$.

[2] Glitch width that will not cause a functional disruption when $\Delta V_{DD(gl)} = 0.5 \times V_{DD(P)}$.

Glitches in the power supply can also affect the power-on reset performance of this device. The glitch width ($t_{w(gl)VDD}$) and glitch height ($\Delta V_{DD(gl)}$) are dependent on each other. The bypass capacitance, source impedance, and device impedance are factors that affect power-on reset performance. Figure 18 and Table 60 provide more information on how to measure these specifications.

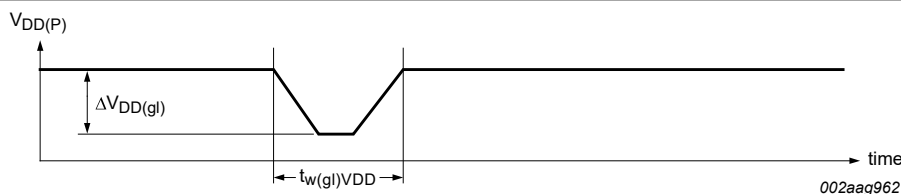
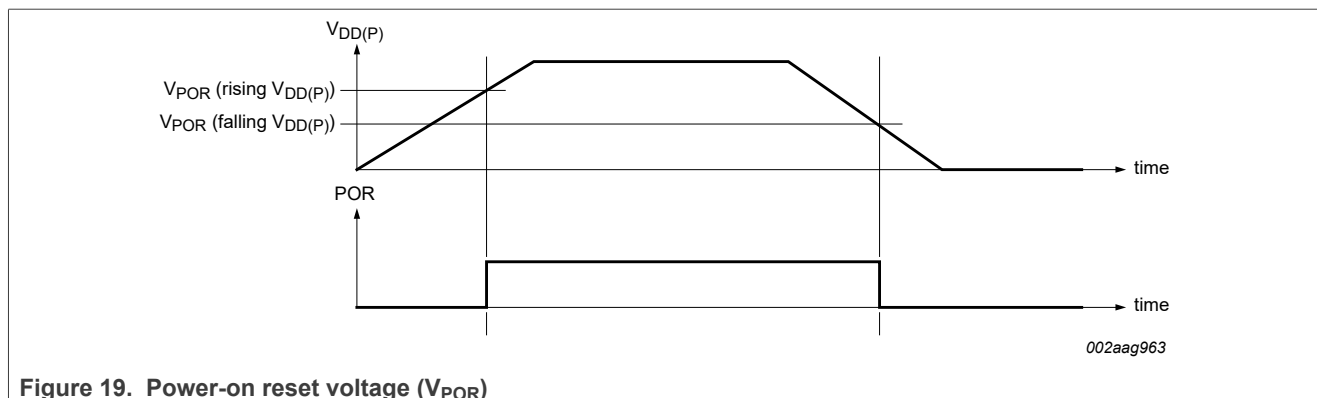


Figure 18. Glitch width and glitch height

V_{POR} is critical to the power-on reset. V_{POR} is the voltage level at which the reset condition is released and all the registers and the SPI bus state machine are initialized to their default states. The value of V_{POR} differs based on the V_{DD} being lowered to or from 0 V. Figure 19 and Table 60 provide more details on this specification.

Figure 19. Power-on reset voltage (V_{POR})

8.3 Device current consumption with internal pull-up and pull-down resistors

The PCAL9722 integrates programmable pull-up and pull-down resistors to eliminate external components when pins are configured as inputs and pull-up or pull-down resistors are required (for example, nothing is driving the inputs to the power supply rails). Since these pull-up and pull-down resistors are internal to the device itself, they contribute to the current consumption of the device and must be considered in the overall system design.

The pull-up or pull-down function is selected in registers 50h, 51h, and 52h, while the resistor is connected by the enable registers 4Ch, 4Dh, and 4Eh. The configuration of the resistors is shown in [Figure 5](#).

If the resistor is configured as a pull-up that is connected to V_{DD} , the current flows from the $V_{DD(P)}$ pin through the resistor to the ground when the pin is held LOW. This current appears as additional I_{DD} upsetting any current consumption measurements.

In the same manner, if the resistor is configured as a pull-down and the pin is held HIGH, current flows from the power supply through the pin to the V_{SS} pin. While this current will not be measured as part of I_{DD} , one must be mindful of the 200 mA limiting value through V_{SS} .

The pull-up and pull-down resistors are simple resistors and the current is linear with voltage. The resistance specification for these devices spans from 50 k Ω with a nominal 100 k Ω value. Any current flowing through these resistors is additive by the number of pins held HIGH or LOW and the current can be calculated by Ohm's law. See [Figure 23](#) for a graph of supply current versus the number of pull-up resistors.

9 Limiting values

[Table 61](#) describes the limiting values of PCAL9722.

Table 61. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
$V_{DD(SPI)}$	SPI bus supply voltage			-0.5	+6.5	V
$V_{DD(P)}$	Supply voltage port P			-0.5	+6.5	V
$V_{I(P)}$	Input voltage on all ports		[1]	-0.5	+6.5	V
$V_{O(P)}$	Output voltage on all ports		[1]	-0.5	+6.5	V
$V_{I(I)}$	Input voltage on SPI-bus, RESET, ADDR			-0.5	+6.5	V
$V_{O(I)}$	Output voltage on SPI-bus, \overline{INT}			-0.5	+6.5	V
I_{IK}	Input clamping current	ADDR, RESET, SCLK, \overline{CS} ; $V_I < 0$ V		-	±20	mA
I_{OK}	Output clamping current	\overline{INT} ; $V_O < 0$ V		-	±20	mA
I_{IOK}	Input/output clamping current	P port; $V_O < 0$ V or $V_O > V_{DD(P)}$		-	±20	mA
		SDIN, SDOUT; $V_O < 0$ V or $V_O > V_{DD(SPI)}$		-	±20	mA
I_{OL}	LOW-level output current	Continuous; P port; $V_O = 0$ V to $V_{DD(P)}$		-	50	mA
		Continuous; SDOUT, \overline{INT} ; $V_O = 0$ V to $V_{DD(SPI)}$		-	25	mA
I_{OH}	HIGH-level output current	Continuous; P port; $V_O = 0$ V to $V_{DD(P)}$		-	25	mA
I_{DD}	Supply current	Continuous through V_{SS}		-	200	mA
$I_{DD(P)}$	Supply current port P	Continuous through $V_{DD(P)}$		-	160	mA
$I_{DD(SPI)}$	SPI bus supply current	Continuous through $V_{DD(SPI)}$		-	10	mA
T_{stg}	Storage temperature			-65	+150	°C
$T_{j(max)}$	Maximum junction temperature			-	150	°C

[1] The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

10 Recommended operating conditions

This section describes the recommended operation conditions for PCAL9722.

Table 62. Operating conditions

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{DD(SPI)}$	SPI supply voltage		1.1	5.5	V
$V_{DD(P)}$	Supply voltage port P		1.65	5.5	V
V_{IH}	HIGH-level input voltage	SCLK, SDIN, \overline{CS} , \overline{RESET} , ADDR	$0.7 \times V_{DD(SPI)}$	5.5	V
		P2_5 to P0_0	$0.7 \times V_{DD(P)}$	5.5	V
V_{IL}	LOW-level input voltage	SCLK, SDIN, \overline{CS} , \overline{RESET} , ADDR	-0.5	$0.3 \times V_{DD(SPI)}$	V
		P2_5 to P0_0	-0.5	$0.3 \times V_{DD(P)}$	V
I_{OH}	HIGH-level output current	P2_5 to P0_0	-	10	mA
I_{OL}	LOW-level output current	P2_5 to P0_0	-	25	mA
T_{amb}	Ambient temperature	Operating in free air; PCAL9722HN	-40	+85	°C
		Operating in free air; PCAL9722HN/Q900	-40	+150	°C

11 Thermal characteristics

Table 63 provides the thermal characteristics of PCAL9722.

Table 63. Thermal characteristics

Symbol	Parameter	Conditions		Value (Typ)	Unit
R _{th(j-a)}	Thermal resistance from junction to ambient on a JEDEC 2S2P board	HVQFN32 package	[1]	39	°C/W

[1] The package thermal resistance is calculated in accordance with JESD 51-7.

12 Static characteristics

Table 64 and Table 65 describe the static characteristics of PCAL9722.

Table 64. Static characteristics for PCAL9722HN

$T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$; $V_{DD(SPI)} = 1.1\text{ V}$ to 5.5 V ; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ ^[1]	Max	Unit
V_{IK}	Input clamping voltage	$I_I = -18\text{ mA}$	-1.2	-	-	V
V_{POR}	Power-on reset voltage	$V_I = V_{DD(P)}$ or V_{SS} ; $I_O = 0\text{ mA}$	-	1.2	1.5	V
V_{OH}	HIGH-level output voltage ^[2]	P port; $I_{OH} = -8\text{ mA}$; CCX.X = 11b				
		$V_{DD(P)} = 1.65\text{ V}$	1.2	-	-	V
		$V_{DD(P)} = 2.3\text{ V}$	1.8	-	-	V
		$V_{DD(P)} = 3\text{ V}$	2.6	-	-	V
		$V_{DD(P)} = 4.5\text{ V}$	4.1	-	-	V
		P port; $I_{OH} = -2.5\text{ mA}$ and CCX.X = 00b; $I_{OH} = -5\text{ mA}$ and CCX.X = 01b; $I_{OH} = -7.5\text{ mA}$ and CCX.X = 10b; $I_{OH} = -10\text{ mA}$ and CCX.X = 11b;				
		$V_{DD(P)} = 1.65\text{ V}$	1.1	-	-	V
		$V_{DD(P)} = 2.3\text{ V}$	1.7	-	-	V
		$V_{DD(P)} = 3\text{ V}$	2.5	-	-	V
		$V_{DD(P)} = 4.5\text{ V}$	4.0	-	-	V
		SDOUT port				
		$V_{DD(SPI)} \leq 1.65\text{ V}$, $I_{OH} = -0.4\text{ mA}$	$0.8 \times V_{DD(SPI)}$	-	-	V
		$V_{DD(SPI)} \geq 1.65\text{ V}$, $I_{OH} = -4\text{ mA}$	$V_{DD(SPI)} - 0.3$	-	-	V
V_{OL}	LOW-level output voltage ^[2]	P port; $I_{OL} = 8\text{ mA}$; CCX.X = 11b				
		$V_{DD(P)} = 1.65\text{ V}$	-	-	0.45	V
		$V_{DD(P)} = 2.3\text{ V}$	-	-	0.25	V
		$V_{DD(P)} = 3\text{ V}$	-	-	0.25	V
		$V_{DD(P)} = 4.5\text{ V}$	-	-	0.20	V
		P port; $I_{OL} = 2.5\text{ mA}$ and CCX.X = 00b; $I_{OL} = 5\text{ mA}$ and CCX.X = 01b; $I_{OL} = 7.5\text{ mA}$ and CCX.X = 10b; $I_{OL} = 10\text{ mA}$ and CCX.X = 11b;				
		$V_{DD(P)} = 1.65\text{ V}$	-	-	0.5	V
		$V_{DD(P)} = 2.3\text{ V}$	-	-	0.3	V
		$V_{DD(P)} = 3\text{ V}$	-	-	0.25	V
		$V_{DD(P)} = 4.5\text{ V}$	-	-	0.2	V
		SDOUT port				

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 64. Static characteristics for PCAL9722HN...continued

 $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$; $V_{DD(SPI)} = 1.1\text{ V}$ to 5.5 V ; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ ^[1]	Max	Unit
		$V_{DD(SPI)} \leq 1.65\text{ V}$, $I_{OL} = 1.2\text{ mA}$	-	-	$0.2 \times V_{DD(SPI)}$	V
		$V_{DD(SPI)} \geq 1.65\text{ V}$, $I_{OL} = 4\text{ mA}$	-	-	0.4	V
I_{OL}	LOW-level output current ^[3]	\overline{INT} ; $V_{OL} = 0.4\text{ V}$; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	3	^[4]	-	mA
I_I	Input current	ADDR, SCLK, SDIN, \overline{CS} , and RESET; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V ; $V_I = V_{DD(SPI)}$ or V_{SS}	-	-	± 1	μA
I_{IH}	HIGH-level input current	P port without internal pull-up resistor; $V_I = V_{DD(P)}$; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	1	μA
I_{IL}	LOW-level input current	P port without internal pull-up resistor; $V_I = V_{SS}$; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	1	μA
I_{DD}	Supply current	$I_{DD(SPI)} + I_{DD(P)}$; SCLK, SDIN, \overline{CS} , P port, ADDR, RESET; V_I on ADDR, SDIN, \overline{CS} and RESET = $V_{DD(SPI)}$ or V_{SS} ; V_I on P port = $V_{DD(P)}$; $I_O = 0\text{ mA}$; I/O = inputs				
		$V_{DD(P)} = 3.6\text{ V}$ to 5.5 V ; $f_{SCLK} = 5\text{ MHz}$	-	500	750	μA
		$V_{DD(P)} = 2.3\text{ V}$ to 3.6 V ; $f_{SCLK} = 5\text{ MHz}$	-	300	500	μA
		$V_{DD(P)} = 1.65\text{ V}$ to 2.3 V ; $f_{SCLK} = 5\text{ MHz}$	-	200	350	μA
		$V_{DD(P)} = 3.6\text{ V}$ to 5.5 V ; $f_{SCLK} = 0\text{ MHz}$	-	3	12	μA
		$V_{DD(P)} = 2.3\text{ V}$ to 3.6 V ; $f_{SCLK} = 0\text{ MHz}$	-	2	6.5	μA
		$V_{DD(P)} = 1.65\text{ V}$ to 2.3 V ; $f_{SCLK} = 0\text{ MHz}$	-	1.5	4.5	μA
		Active mode; $I_{DD(SPI)} + I_{DD(P)}$; SCLK, SDIN, \overline{CS} , P port, ADDR, RESET; V_I on SDIN, \overline{CS} , ADDR, and RESET = $V_{DD(SPI)}$ or V_{SS} ; V_I on P port = $V_{DD(P)}$; $I_O = 0\text{ mA}$; I/O = inputs; $f_{SCLK} = 5\text{ MHz}$; continuous register read with 100 pF load on SDOUT				
		$V_{DD(P)} = 3.6\text{ V}$ to 5.5 V	-	2500	4200	μA
		$V_{DD(P)} = 2.3\text{ V}$ to 3.6 V	-	2200	3200	μA
		$V_{DD(P)} = 1.65\text{ V}$ to 2.3 V	-	1800	2800	μA
		With pull-ups enabled; $I_{DD(SPI)} + I_{DD(P)}$; P port, ADDR, RESET; V_I on ADDR, SCLK, SDIN, \overline{CS} , and RESET = $V_{DD(SPI)}$ or V_{SS} ; V_I on P port = V_{SS} ; $I_O = 0\text{ mA}$; I/O = inputs with pull-up enabled; $f_{SCLK} = 0\text{ kHz}$				
		$V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	1.65	2.4	mA

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 64. Static characteristics for PCAL9722HN...continued

 $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$; $V_{DD(SPI)} = 1.1\text{ V}$ to 5.5 V ; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ ^[1]	Max	Unit
ΔI_{DD}	Additional quiescent supply current ^[5]	ADDR, SCLK, SDIN, \overline{CS} , and RESET; one input at $V_{DD(SPI)} - 0.6\text{ V}$, other inputs at $V_{DD(SPI)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	30	μA
		P port; one input at $V_{DD(P)} - 0.6\text{ V}$, other inputs at $V_{DD(P)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	80	μA
C_i	Input capacitance ^[6]	$V_I = V_{DD(SPI)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	6	7	pF
C_{io}	Input/output capacitance ^[6]	$V_{I/O} = V_{DD(SPI)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	7	8	pF
		$V_{I/O} = V_{DD(P)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	7.5	8.5	pF
$R_{pu(int)}$	Internal pull-up resistance	Input/output	50	100	150	k Ω
$R_{pd(int)}$	Internal pull-down resistance	Input/output	50	100	150	k Ω

[1] For I_{DD} , all typical values are at nominal supply voltage (1.8 V, 2.5 V, 3.3 V, or 3.6 V V_{DD}) and $T_{amb} = 25\text{ }^{\circ}\text{C}$. Except for I_{DD} , the typical values are at $V_{DD(P)} = V_{DD(SPI)} = 3.3\text{ V}$ and $T_{amb} = 25\text{ }^{\circ}\text{C}$.

[2] The total current sourced by all I/Os must be limited to 160 mA.

[3] Each I/O must be externally limited to a maximum of 25 mA and each octal (P0_0 to P0_7 and P1_0 to P1_7) must be limited to a maximum current of 100 mA, for a device total of 200 mA.

[4] Typical value for $T_{amb} = 25\text{ }^{\circ}\text{C}$. $V_{OL} = 0.4\text{ V}$ and $V_{DD(SPI)} = V_{DD(P)} = 3.3\text{ V}$. Typical value for $V_{DD(SPI)} = V_{DD(P)} < 2.5\text{ V}$, $V_{OL} = 0.6\text{ V}$.

[5] Internal pull-up/pull-down resistors disabled.

[6] Value is not tested in production, but guaranteed by design and characterization.

Table 65. Static characteristics for PCAL9722HN/Q900

 $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$; $V_{DD(SPI)} = 1.1\text{ V}$ to 5.5 V ; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ ^[1]	Max	Unit
V_{IK}	Input clamping voltage	$I_I = -18\text{ mA}$	-1.2	-	-	V
V_{POR}	Power-on reset voltage	$V_I = V_{DD(P)}$ or V_{SS} ; $I_O = 0\text{ mA}$	-	1.2	1.5	V
V_{OH}	HIGH-level output voltage ^[2]	P port; $I_{OH} = -8\text{ mA}$; CCX.X = 11b				
		$V_{DD(P)} = 1.65\text{ V}$	1.2	-	-	V
		$V_{DD(P)} = 2.3\text{ V}$	1.8	-	-	V
		$V_{DD(P)} = 3\text{ V}$	2.6	-	-	V
		$V_{DD(P)} = 4.5\text{ V}$	4.1	-	-	V
		P port; $I_{OH} = -2.5\text{ mA}$ and CCX.X = 00b; $I_{OH} = -5\text{ mA}$ and CCX.X = 01b; $I_{OH} = -7.5\text{ mA}$ and CCX.X = 10b; $I_{OH} = -10\text{ mA}$ and CCX.X = 11b;				
		$V_{DD(P)} = 1.65\text{ V}$	1.1	-	-	V
		$V_{DD(P)} = 2.3\text{ V}$	1.7	-	-	V
		$V_{DD(P)} = 3\text{ V}$	2.5	-	-	V
		$V_{DD(P)} = 4.5\text{ V}$	4.0	-	-	V

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 65. Static characteristics for PCAL9722HN/Q900...continued

 $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$; $V_{DD(SPI)} = 1.1\text{ V}$ to 5.5 V ; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ ^[1]	Max	Unit
		SDOUT port				
		$V_{DD(SPI)} \leq 1.65\text{ V}$, $I_{OH} = -0.4\text{ mA}$	$0.8 \times V_{DD(SPI)}$	-	-	V
		$V_{DD(SPI)} \geq 1.65\text{ V}$, $I_{OH} = -4\text{ mA}$	$V_{DD(SPI)} - 0.3$	-	-	V
V_{OL}	LOW-level output voltage ^[2]	P port; $I_{OL} = 8\text{ mA}$; CCX.X = 11b				
		$V_{DD(P)} = 1.65\text{ V}$	-	-	0.45	V
		$V_{DD(P)} = 2.3\text{ V}$	-	-	0.25	V
		$V_{DD(P)} = 3\text{ V}$	-	-	0.25	V
		$V_{DD(P)} = 4.5\text{ V}$	-	-	0.20	V
		P port; $I_{OL} = 2.5\text{ mA}$ and CCX.X = 00b; $I_{OL} = 5\text{ mA}$ and CCX.X = 01b; $I_{OL} = 7.5\text{ mA}$ and CCX.X = 10b; $I_{OL} = 10\text{ mA}$ and CCX.X = 11b;				
		$V_{DD(P)} = 1.65\text{ V}$	-	-	0.5	V
		$V_{DD(P)} = 2.3\text{ V}$	-	-	0.3	V
		$V_{DD(P)} = 3\text{ V}$	-	-	0.25	V
		$V_{DD(P)} = 4.5\text{ V}$	-	-	0.2	V
		SDOUT port				
		$V_{DD(SPI)} \leq 1.65\text{ V}$, $I_{OL} = 1.2\text{ mA}$	-	-	$0.2 \times V_{DD(SPI)}$	V
		$V_{DD(SPI)} \geq 1.65\text{ V}$, $I_{OL} = 4\text{ mA}$	-	-	0.4	V
I_{OL}	LOW-level output current ^[3]	\overline{INT} ; $V_{OL} = 0.4\text{ V}$; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	3	^[4]	-	mA
I_I	Input current	ADDR, SCLK, SDIN, \overline{CS} , and RESET; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V ; $V_I = V_{DD(SPI)}$ or V_{SS}	-	-	± 1	μA
I_{IH}	HIGH-level input current	P port without internal pull-up resistor; $V_I = V_{DD(P)}$; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	1	μA
I_{IL}	LOW-level input current	P port without internal pull-up resistor; $V_I = V_{SS}$; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	1	μA
I_{DD}	Supply current	$I_{DD(SPI)} + I_{DD(P)}$; SCLK, SDIN, \overline{CS} , P port, ADDR, RESET; V_I on ADDR, SDIN, \overline{CS} and RESET = $V_{DD(SPI)}$ or V_{SS} ; V_I on P port = $V_{DD(P)}$; $I_O = 0\text{ mA}$; I/O = inputs				
		$V_{DD(P)} = 3.6\text{ V}$ to 5.5 V ; $f_{SCLK} = 5\text{ MHz}$	-	500	750	μA
		$V_{DD(P)} = 2.3\text{ V}$ to 3.6 V ; $f_{SCLK} = 5\text{ MHz}$	-	300	500	μA
		$V_{DD(P)} = 1.65\text{ V}$ to 2.3 V ; $f_{SCLK} = 5\text{ MHz}$	-	200	350	μA

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Table 65. Static characteristics for PCAL9722HN/Q900...continued

 $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$; $V_{DD(SPI)} = 1.1\text{ V}$ to 5.5 V ; unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ ^[1]	Max	Unit
		$V_{DD(P)} = 3.6\text{ V}$ to 5.5 V ; $f_{SCLK} = 0\text{ MHz}$	-	3	12	μA
		$V_{DD(P)} = 2.3\text{ V}$ to 3.6 V ; $f_{SCLK} = 0\text{ MHz}$	-	2	6.5	μA
		$V_{DD(P)} = 1.65\text{ V}$ to 2.3 V ; $f_{SCLK} = 0\text{ MHz}$	-	1.5	4.5	μA
		Active mode; $I_{DD(SPI)} + I_{DD(P)}$; SCLK, SDIN, $\overline{\text{CS}}$, P port, ADDR, RESET; V_I on SDIN, $\overline{\text{CS}}$, ADDR, and RESET = $V_{DD(SPI)}$ or V_{SS} ; V_I on P port = $V_{DD(P)}$; $I_O = 0\text{ mA}$; I/O = inputs; $f_{SCLK} = 5\text{ MHz}$; continuous register read with 100 pF load on SDOOUT				
		$V_{DD(P)} = 3.6\text{ V}$ to 5.5 V	-	2500	4200	μA
		$V_{DD(P)} = 2.3\text{ V}$ to 3.6 V	-	2200	3200	μA
		$V_{DD(P)} = 1.65\text{ V}$ to 2.3 V	-	1800	2800	μA
		With pull-ups enabled; $I_{DD(SPI)} + I_{DD(P)}$; P port, ADDR, RESET; V_I on ADDR, SCLK, SDIN, $\overline{\text{CS}}$, and RESET = $V_{DD(SPI)}$ or V_{SS} ; V_I on P port = V_{SS} ; $I_O = 0\text{ mA}$; I/O = inputs with pull-up enabled; $f_{SCLK} = 0\text{ kHz}$				
		$V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	1.65	2.4	mA
ΔI_{DD}	Additional quiescent supply current ^[5]	ADDR, SCLK, SDIN, $\overline{\text{CS}}$, and RESET; one input at $V_{DD(SPI)} - 0.6\text{ V}$, other inputs at $V_{DD(SPI)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	30	μA
		P port; one input at $V_{DD(P)} - 0.6\text{ V}$, other inputs at $V_{DD(P)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	-	80	μA
C_i	Input capacitance ^[6]	$V_I = V_{DD(SPI)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	6	7	pF
C_{io}	Input/output capacitance ^[6]	$V_{I/O} = V_{DD(SPI)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	7	8	pF
		$V_{I/O} = V_{DD(P)}$ or V_{SS} ; $V_{DD(P)} = 1.65\text{ V}$ to 5.5 V	-	7.5	8.5	pF
$R_{pu(int)}$	Internal pull-up resistance	Input/output	50	100	150	$\text{k}\Omega$
$R_{pd(int)}$	Internal pull-down resistance	Input/output	50	100	150	$\text{k}\Omega$

[1] For I_{DD} , all typical values are at nominal supply voltage (1.8 V , 2.5 V , 3.3 V , or 3.6 V V_{DD}) and $T_{amb} = 25\text{ }^{\circ}\text{C}$. Except for I_{DD} , the typical values are at $V_{DD(P)} = V_{DD(SPI)} = 3.3\text{ V}$ and $T_{amb} = 25\text{ }^{\circ}\text{C}$.

[2] The total current sourced by all I/Os must be limited to 160 mA .

[3] Each I/O must be externally limited to a maximum of 25 mA and each octal ($P0_0$ to $P0_7$ and $P1_0$ to $P1_7$) must be limited to a maximum current of 100 mA , for a device total of 200 mA .



[4] Typical value for $T_{amb} = 25\text{ }^{\circ}\text{C}$. $V_{OL} = 0.4\text{ V}$ and $V_{DD(SPI)} = V_{DD(P)} = 3.3\text{ V}$. Typical value for $V_{DD(SPI)} = V_{DD(P)} < 2.5\text{ V}$, $V_{OL} = 0.6\text{ V}$.

[5] Internal pull-up/pull-down resistors disabled.

[6] Value is not tested in production, but guaranteed by design and characterization.

12.1 Typical characteristics

Figures given below describe the typical characteristics of PCAL722.

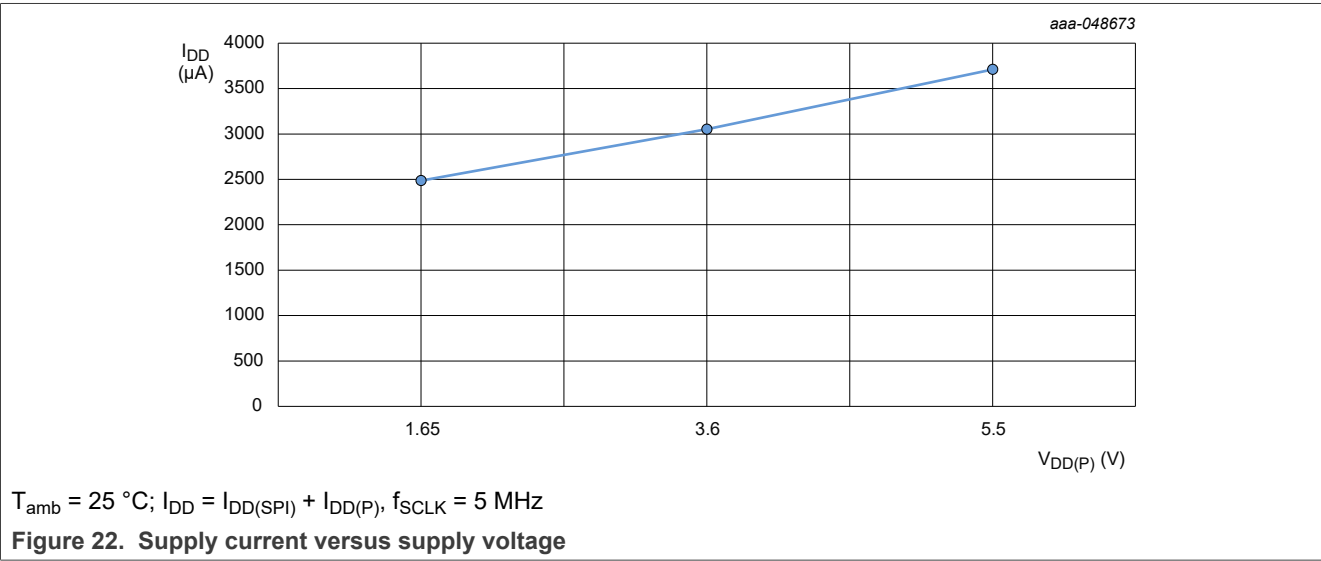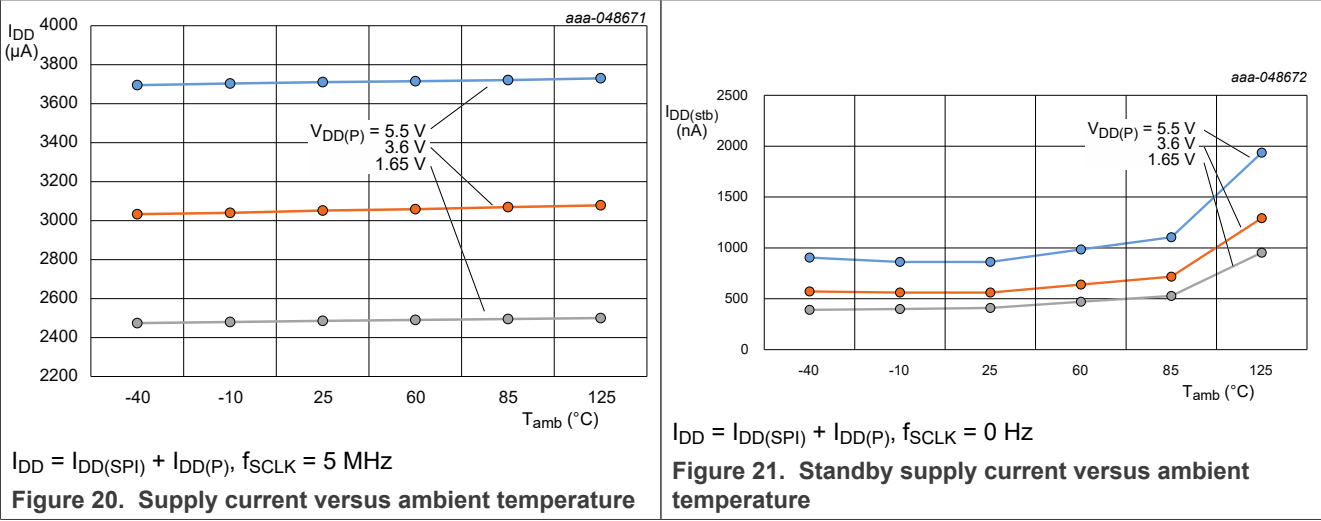

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset




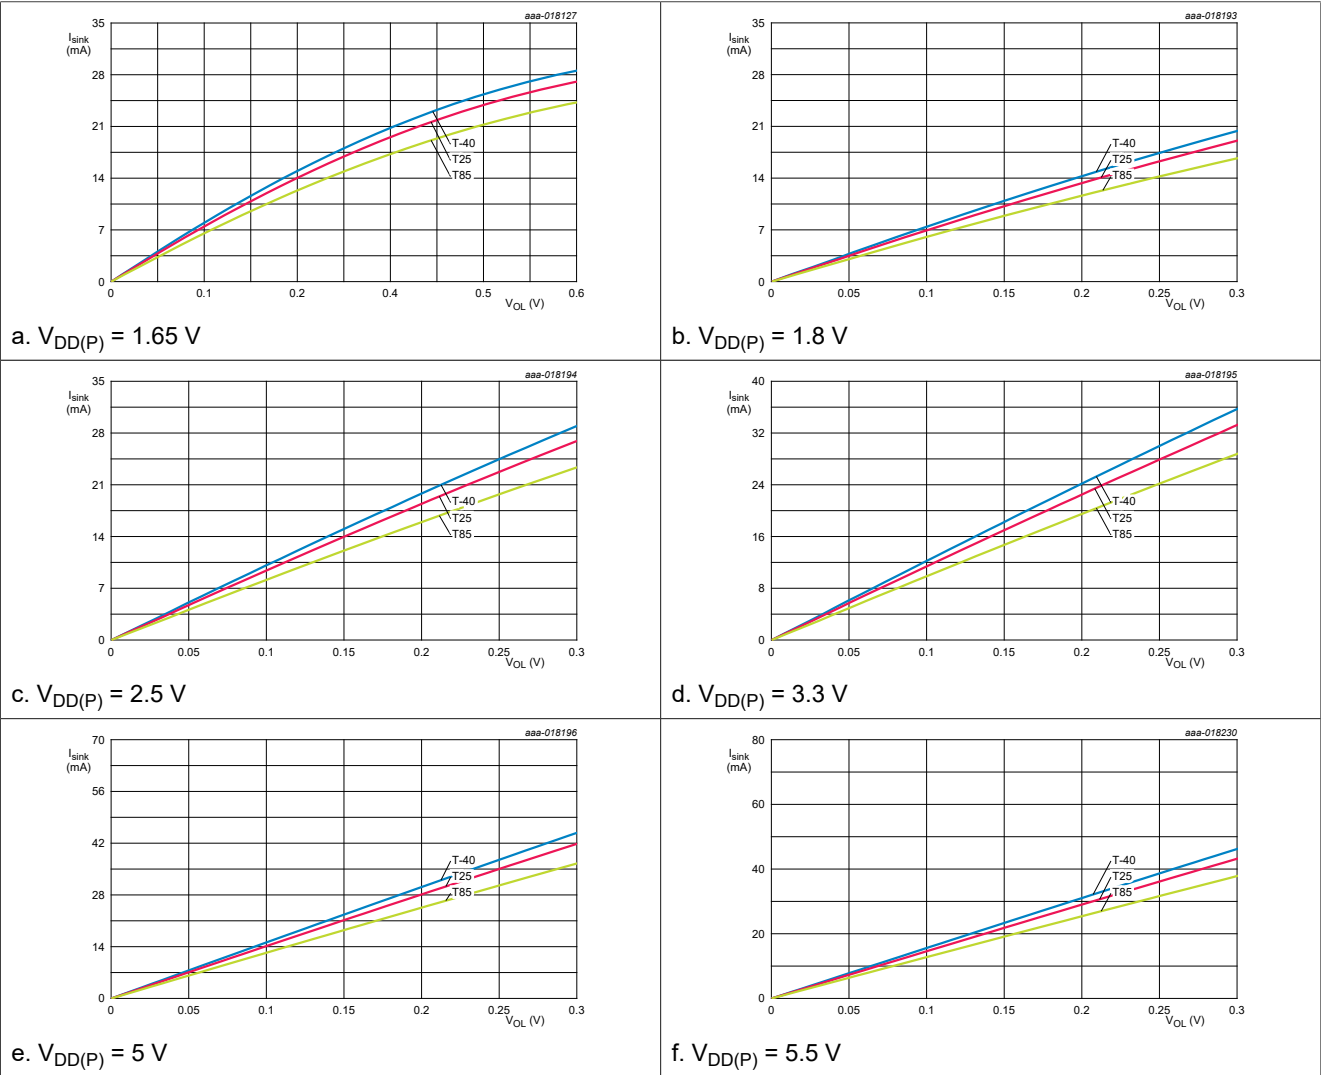


Figure 24. I/O sink current vs LOW-level output voltage

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

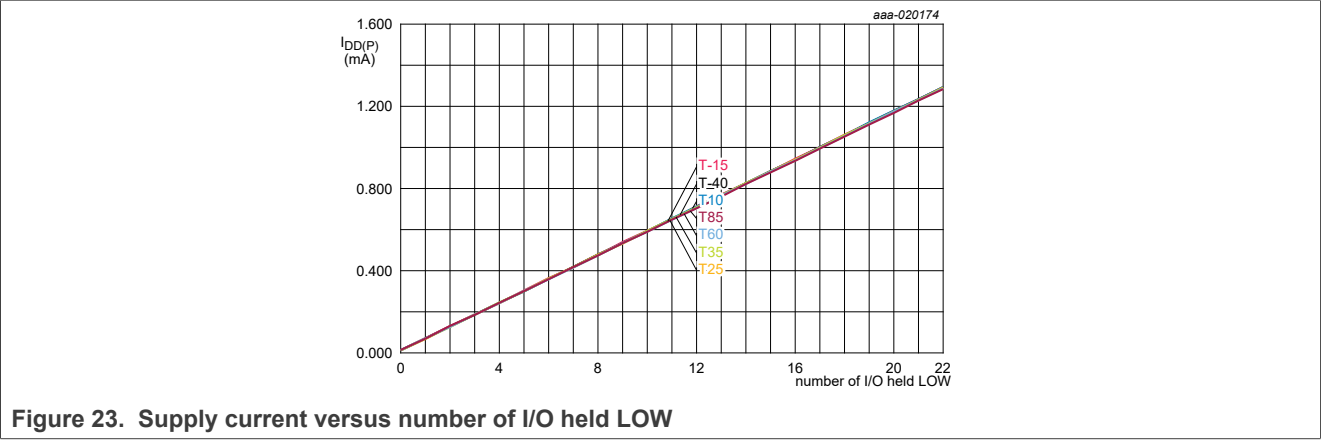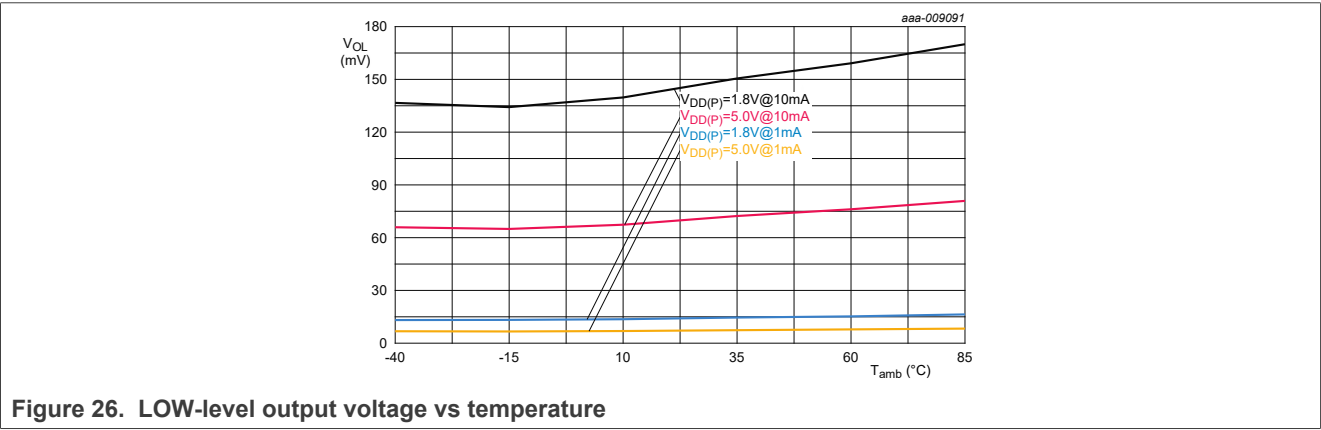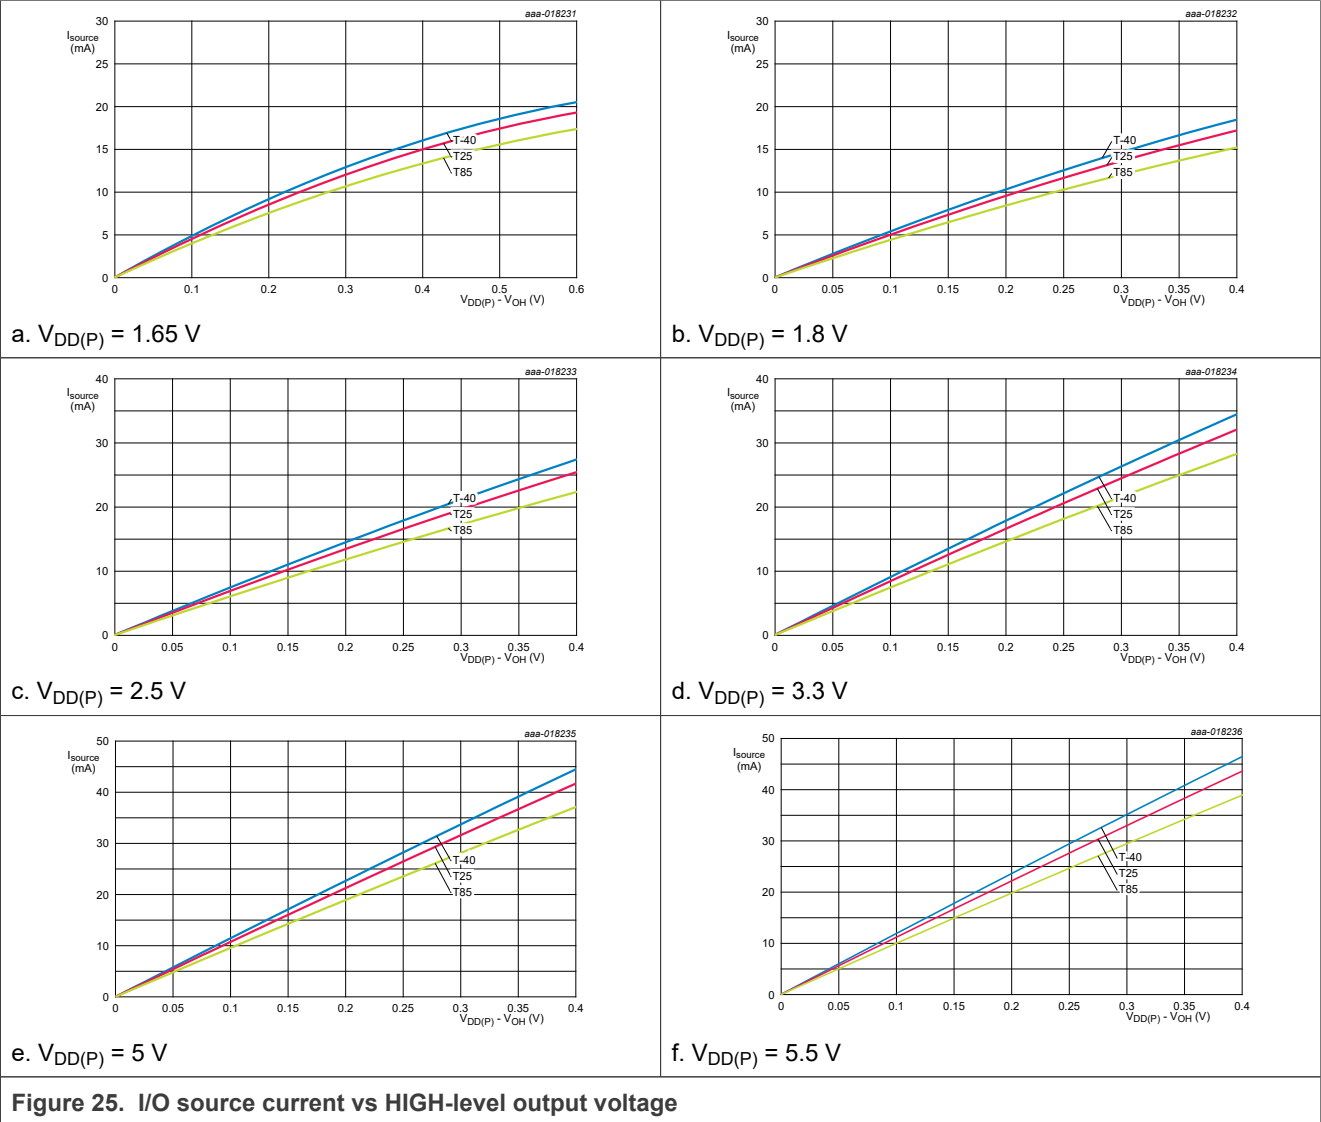

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

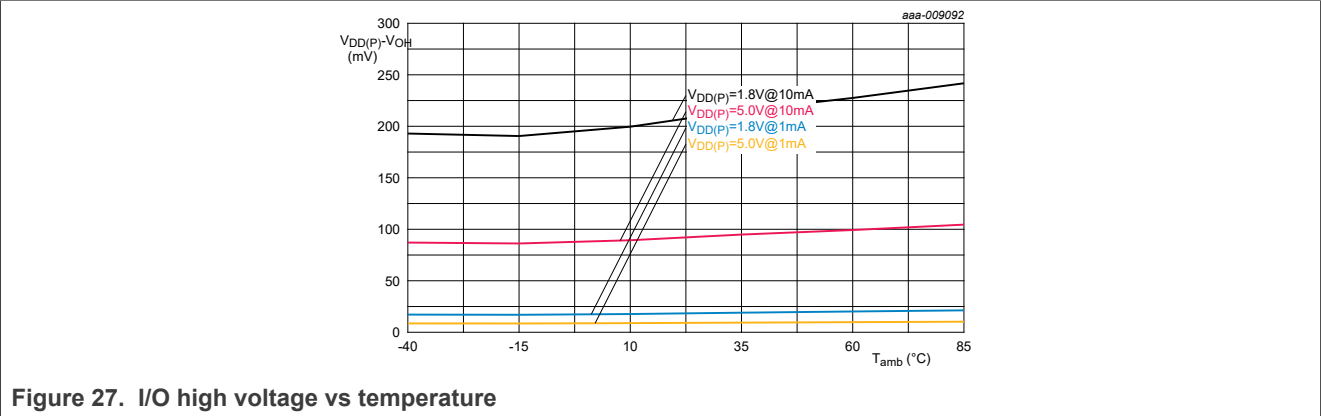


Figure 27. I/O high voltage vs temperature

13 Dynamic characteristics

This section describes the dynamic characteristics of PCAL9722. It is organized into three tables as follows:

Table 66. SPI bus interface timing requirements

Over recommended operating free air temperature range, unless otherwise specified. See [Figure 29](#).

Symbol	Parameter	Conditions	$V_{DD(SPI)} \leq 1.65$		$V_{DD(SPI)} \leq 5.5$		Unit
			Min	Max	Min	Max	
f_{SCLK}	Maximum input clock frequency		-	2	-	5	MHz
t_{LOW}	LOW period of the SCLK clock		250	-	100	-	ns
t_{HIGH}	HIGH period of the SCLK clock		250	-	100	-	ns
t_{DS}	SDIN to SCLK set-up time		20	-	20	-	ns
t_{DH}	SDIN to SCLK hold time		30	-	30	-	ns
t_{CSS}	CSn to SCLK rise set-up time		100	-	100	-	ns
t_{CS_HI}	Minimum CSn de-asserted HIGH time		200	-	200	-	ns
t_{CSH}	SCLK fall to CSn de-asserted hold time		20	-	20	-	ns
$t_{DIS(SDOUT)}$	SDOUT disable time	$C_L = 100$ pF	-	150	-	150	ns
$t_{V(SDOUT)}$	SDOUT valid time	$C_L = 100$ pF	-	200	-	200	ns

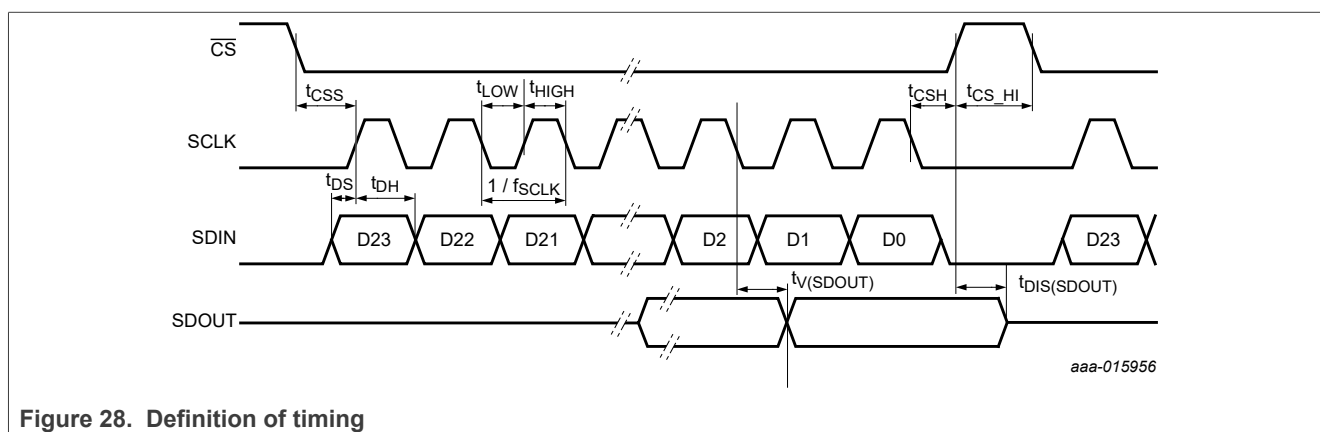


Figure 28. Definition of timing

Table 67. Reset timing requirements

Over recommended operating free air temperature range, unless otherwise specified. See [Figure 31](#).

Symbol	Parameter	Conditions	SPI bus		Unit
			Min	Max	
$t_{w(rst)}$	Reset pulse width		150	-	ns
$t_{rec(rst)}$	Reset recovery time		500	-	ns
t_{rst}	Reset time	[1]	600	-	ns

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset


[1] Minimum time for SDOOUT to become HIGH.


Table 68. Switching characteristics
Over recommended operating free air temperature range; $C_L \leq 100\text{ pF}$; unless otherwise specified. See [Figure 30](#).

Symbol	Parameter	Conditions	SPI bus		Unit
			Min	Max	
$t_{V(INT)}$	Valid time on pin \overline{INT}	From P port to \overline{INT}	-	1	μs
$t_{rst(INT)}$	Reset time on pin \overline{INT}	From SCLK to \overline{INT}	-	1	μs
$t_{V(Q)}$	Data output valid time	From SCLK to P port	-	400	ns
$t_{su(D)}$	Data input set-up time	From P port to SCLK	30	-	ns
$t_{h(D)}$	Data input hold time	From P port to SCLK	10	-	ns


14 Parameter measurement information

This section covers the parameter measurement information, including load circuits and voltage waveforms for key interfaces and signals.

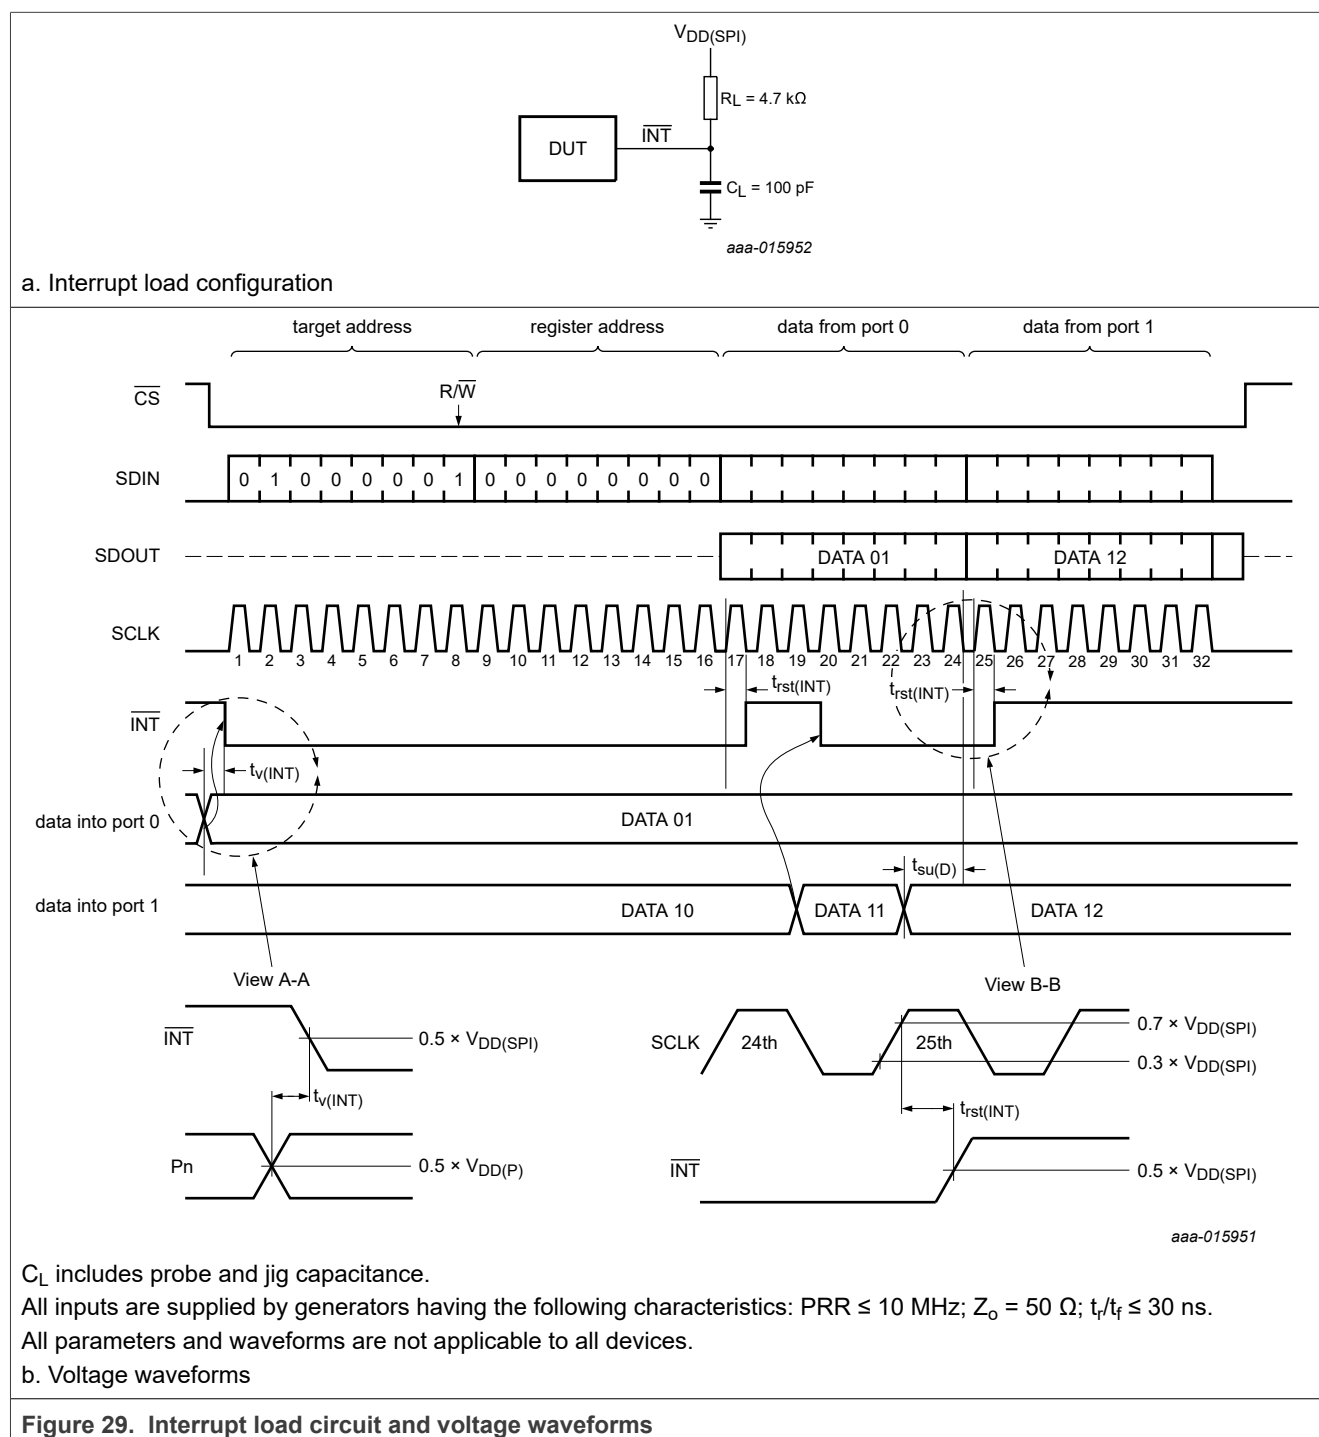


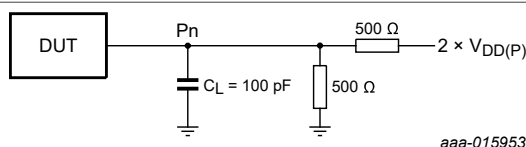

a. P port load configuration

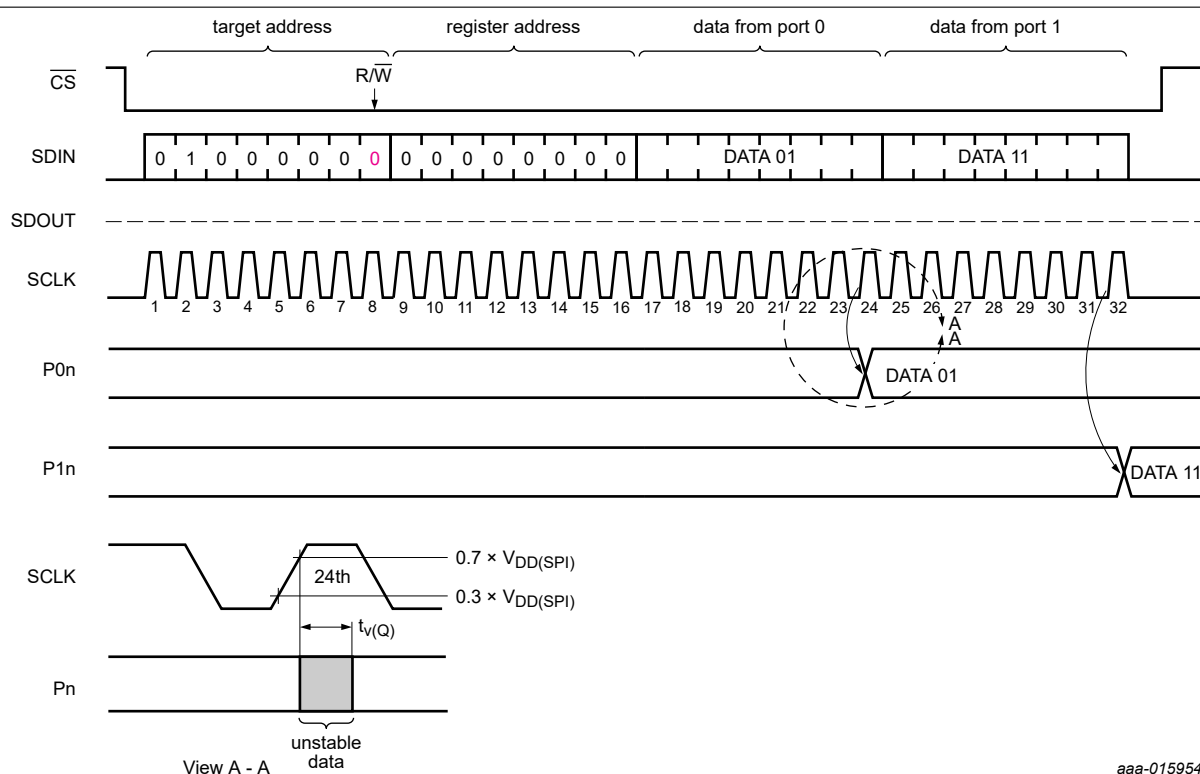

b. Write mode ($R/\overline{W} = 0$)

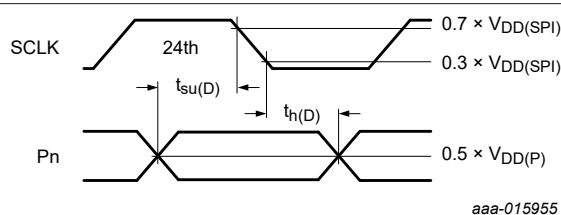

C_L includes probe and jig capacitance.

$t_{v(Q)}$ is measured from $0.7 \times V_{DD(SPI)}$ on SCLK to 50 % I/O (Pn) output.

All inputs are supplied by generators having the following characteristics: $PRR \leq 10$ MHz; $Z_o = 50 \Omega$; $t_r/t_f \leq 30$ ns.

The outputs are measured one at a time, with one transition per measurement.

All parameters and waveforms are not applicable to all devices.

c. Read mode ($R/\overline{W} = 1$)

Figure 30. P port load circuit and voltage waveforms

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

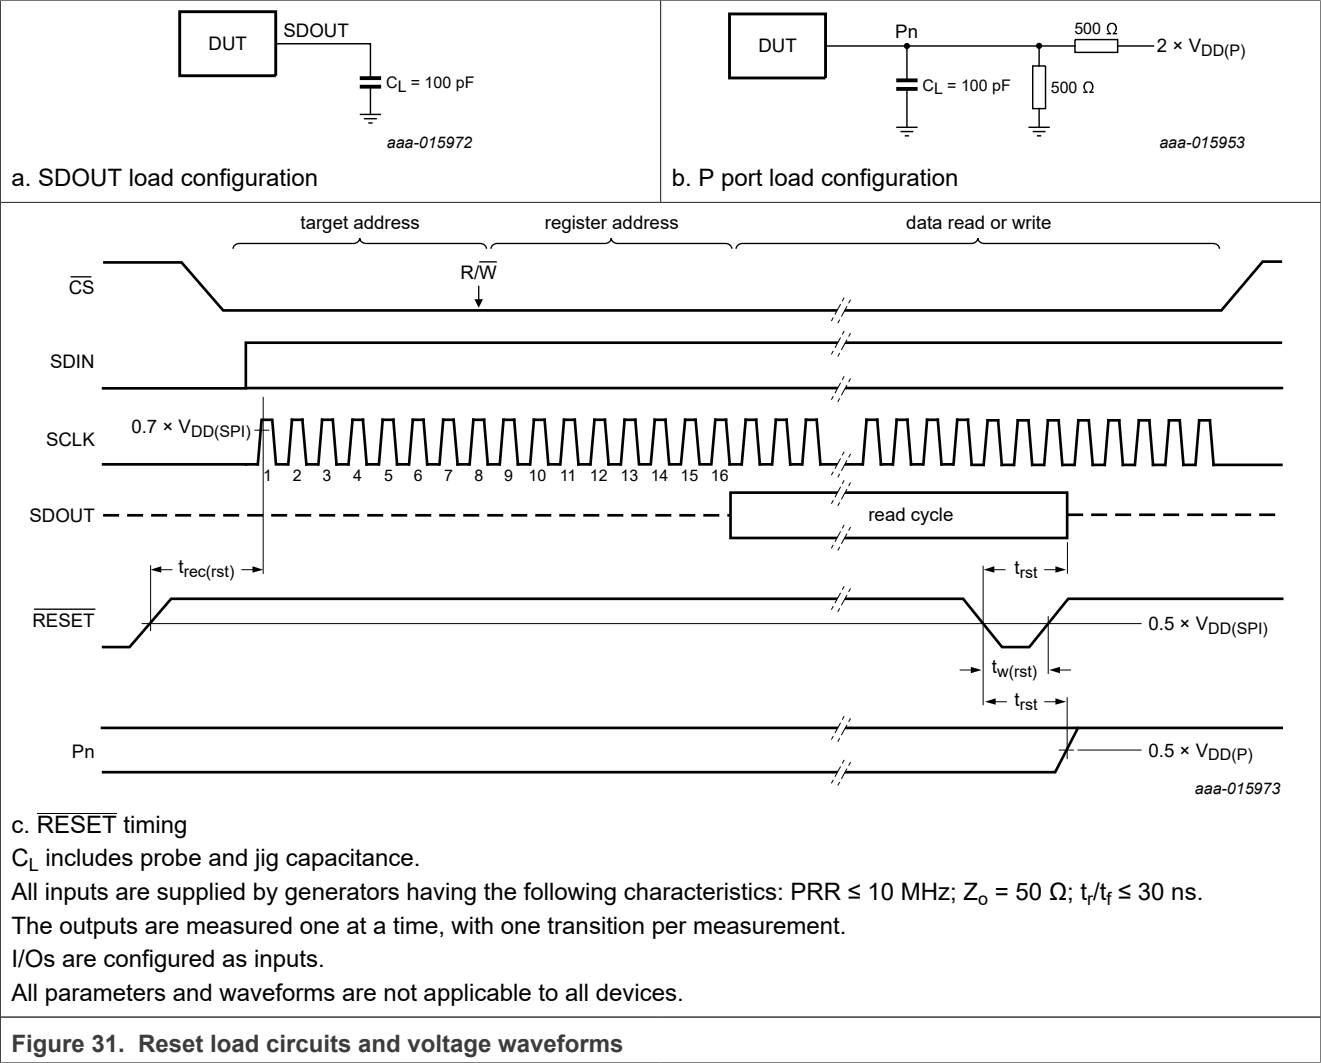


Figure 31. Reset load circuits and voltage waveforms

15 Package information

This section explains the package information associated with PCAL9722. It is divided into three sub-sections as follows:

15.1 Package summary

- Terminal position code Q: (quad)
- Package type descriptive code: HVQFN32
- Package type industry code: HVQFN32
- Package style descriptive code: HVQFN (thermal enhanced very thin quad flatpack; no leads)
- Package body material type: P (plastic)
- JEDEC package outline code: MO-220
- Mounting method type: S (surface mount)
- Issue date: 22-10-2002
- Manufacturer package code: 98ASA01350D

Table 69. Package summary

Parameter	Min	Nom	Max	Unit
Package length	4.9	5	5.1	mm
Package width	4.9	5	5.1	mm
Seated height	0.8	0.85	1	mm
Nominal pitch	-	0.5	-	mm
Actual quantity of termination	-	32	-	

15.2 Package outline

This section covers the package outline for SOT617-3 (HVQFN32).

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

HVQFN32: plastic thermal enhanced very thin quad flat package; no leads;
32 terminals; body 5 x 5 x 0.85 mm

SOT617-3


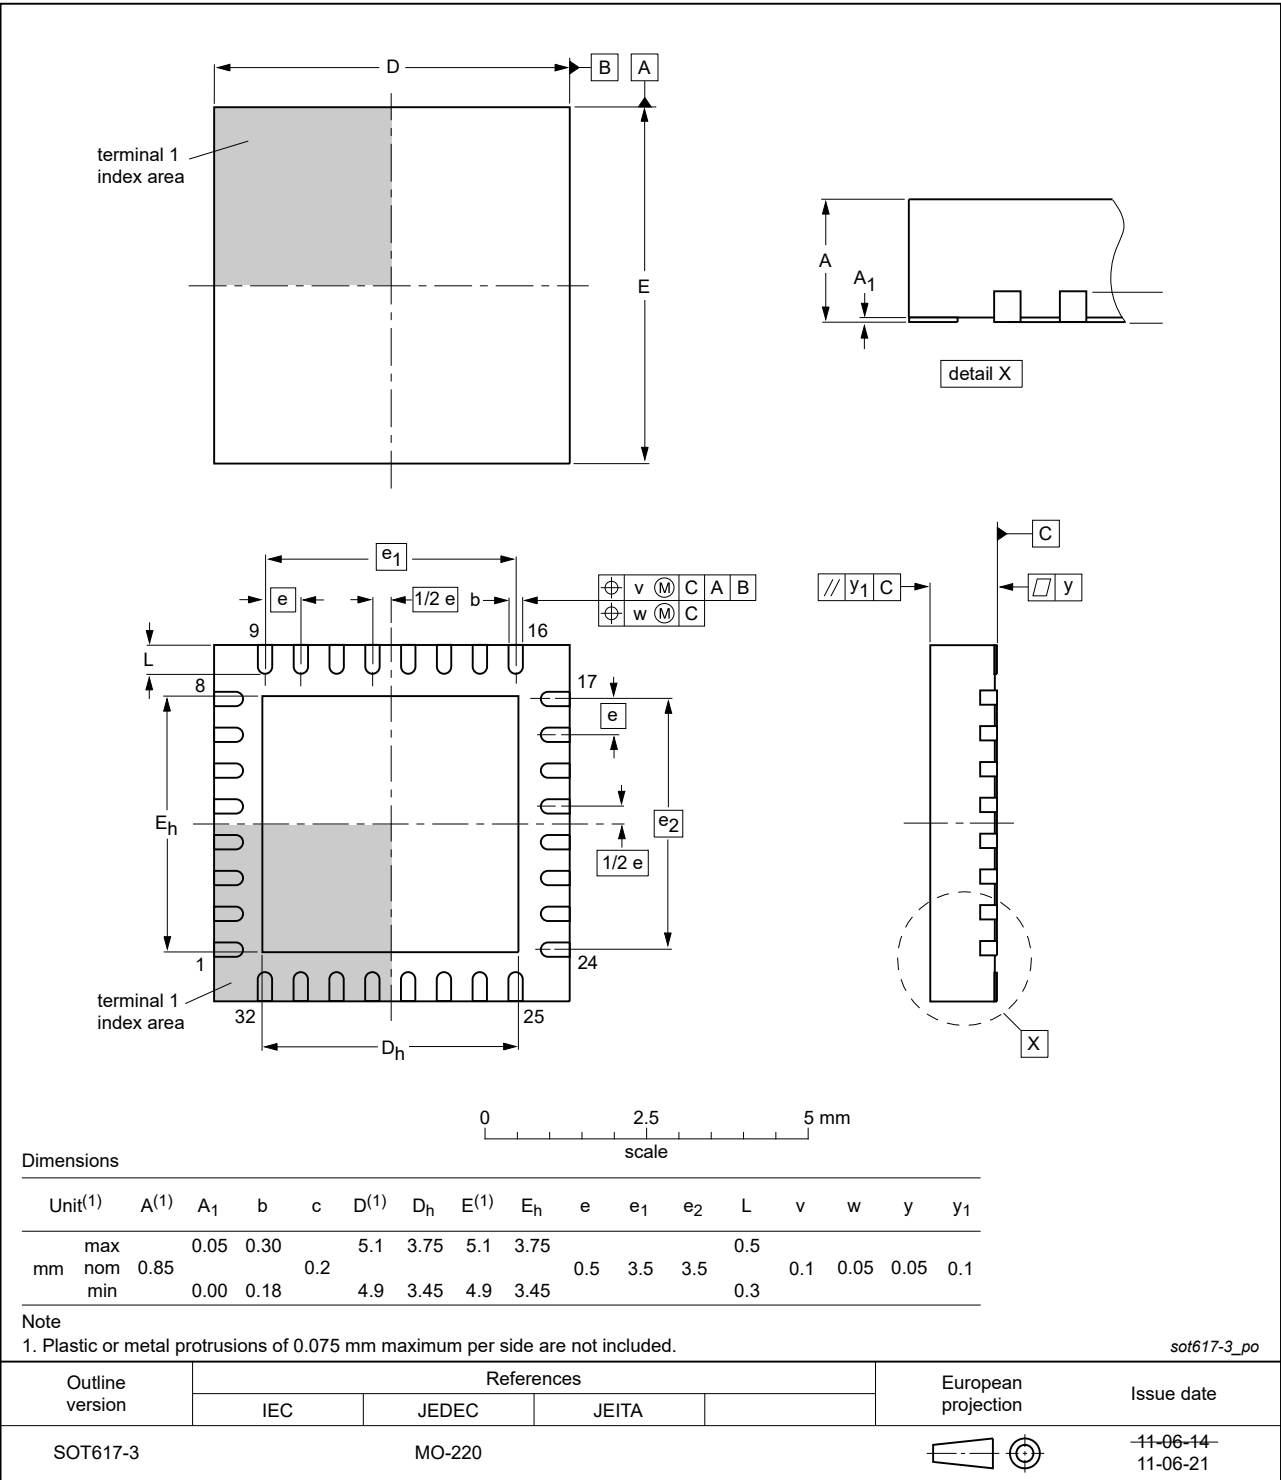


Figure 32. Package outline SOT617-3 (HVQFN32)

15.3 Soldering

This section covers the reflow soldering footprint for HVQFN32 (SOT617-3).

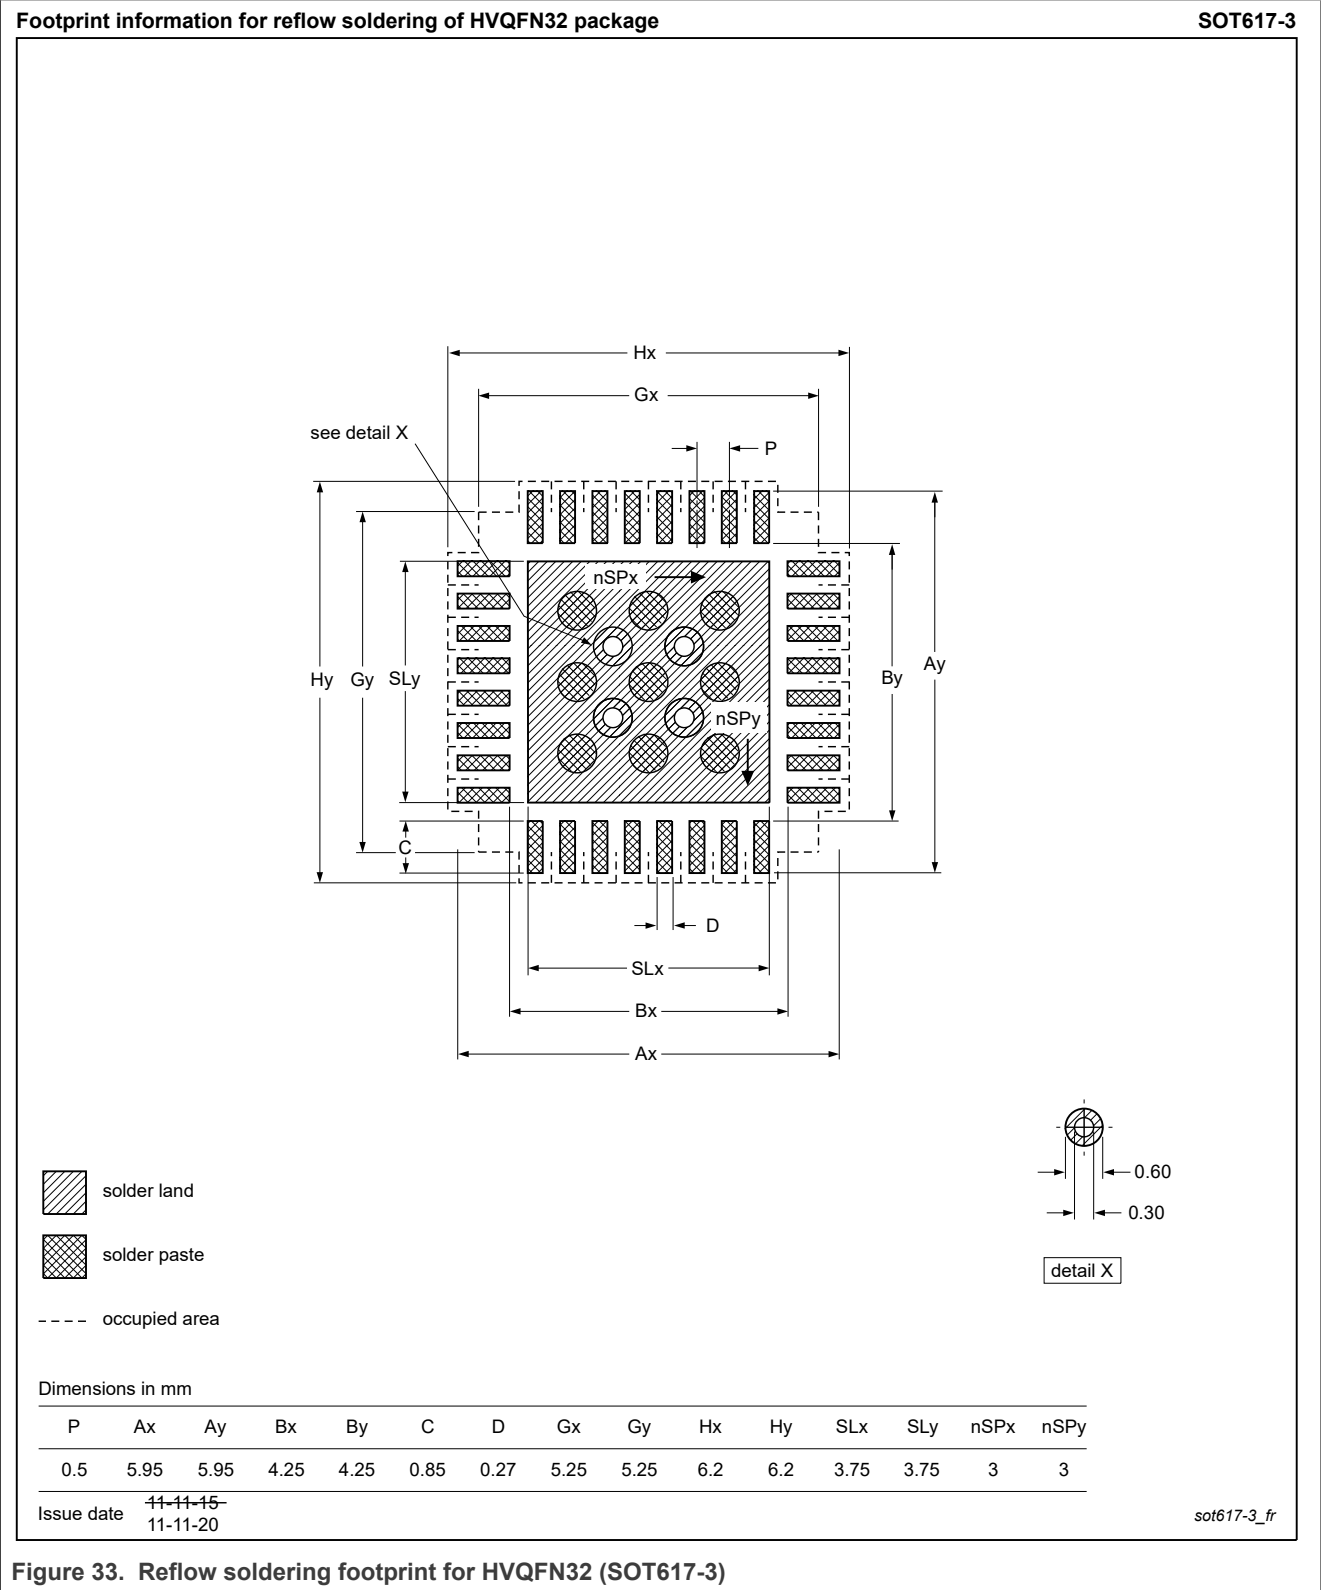

16 Soldering of SMD packages

This text provides a very brief insight into a complex technology. A more in-depth account of soldering ICs can be found in Application Note *AN10365 "Surface mount reflow soldering description"*.

16.1 Introduction to soldering

Soldering is one of the most common methods through which packages are attached to Printed Circuit Boards (PCBs), to form electrical circuits. The soldered joint provides both the mechanical and the electrical connection. There is no single soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and Surface Mount Devices (SMDs) are mixed on one printed wiring board; however, it is not suitable for fine pitch SMDs. Reflow soldering is ideal for the small pitches and high densities that come with increased miniaturization.

16.2 Wave and reflow soldering

Wave soldering is a joining technology in which the joints are made by solder coming from a standing wave of liquid solder. The wave soldering process is suitable for the following:

- Through-hole components
- Leaded or leadless SMDs, which are glued to the surface of the printed circuit board

Not all SMDs can be wave soldered. Packages with solder balls, and some leadless packages which have solder lands underneath the body, cannot be wave soldered. Also, leaded SMDs with leads having a pitch smaller than ~0.6 mm cannot be wave soldered, due to an increased probability of bridging.

The reflow soldering process involves applying solder paste to a board, followed by component placement and exposure to a temperature profile. Leaded packages, packages with solder balls, and leadless packages are all reflow solderable.

Key characteristics in both wave and reflow soldering are:

- Board specifications, including the board finish, solder masks and vias
- Package footprints, including solder thieves and orientation
- The moisture sensitivity level of the packages
- Package placement
- Inspection and repair
- Lead-free soldering versus SnPb soldering

16.3 Wave soldering

Key characteristics in wave soldering are:

- Process issues, such as application of adhesive and flux, clinching of leads, board transport, the solder wave parameters, and the time during which components are exposed to the wave
- Solder bath specifications, including temperature and impurities

16.4 Reflow soldering

Key characteristics in reflow soldering are:

- Lead-free versus SnPb soldering; note that a lead-free reflow process usually leads to higher minimum peak temperatures (see [Figure 34](#)) than a SnPb process, thus reducing the process window
- Solder paste printing issues including smearing, release, and adjusting the process window for a mix of large and small components on one board

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

- Reflow temperature profile; this profile includes preheat, reflow (in which the board is heated to the peak temperature) and cooling down. It is imperative that the peak temperature is high enough for the solder to make reliable solder joints (a solder paste characteristic). In addition, the peak temperature must be low enough that the packages and/or boards are not damaged. The peak temperature of the package depends on package thickness and volume and is classified in accordance with [Table 70](#) and [Table 71](#)

Table 70. SnPb eutectic process (from J-STD-020D)

Package thickness (mm)	Package reflow temperature (°C)	
	Volume (mm³)	
	< 350	≥ 350
< 2.5	235	220
≥ 2.5	220	220

Table 71. Lead-free process (from J-STD-020D)

Package thickness (mm)	Package reflow temperature (°C)		
	Volume (mm³)		
	< 350	350 to 2000	> 2000
< 1.6	260	260	260
1.6 to 2.5	260	250	245
> 2.5	250	245	245

Moisture sensitivity precautions, as indicated on the packing, must be respected at all times. Studies have shown that small packages reach higher temperatures during reflow soldering, see [Figure 34](#).

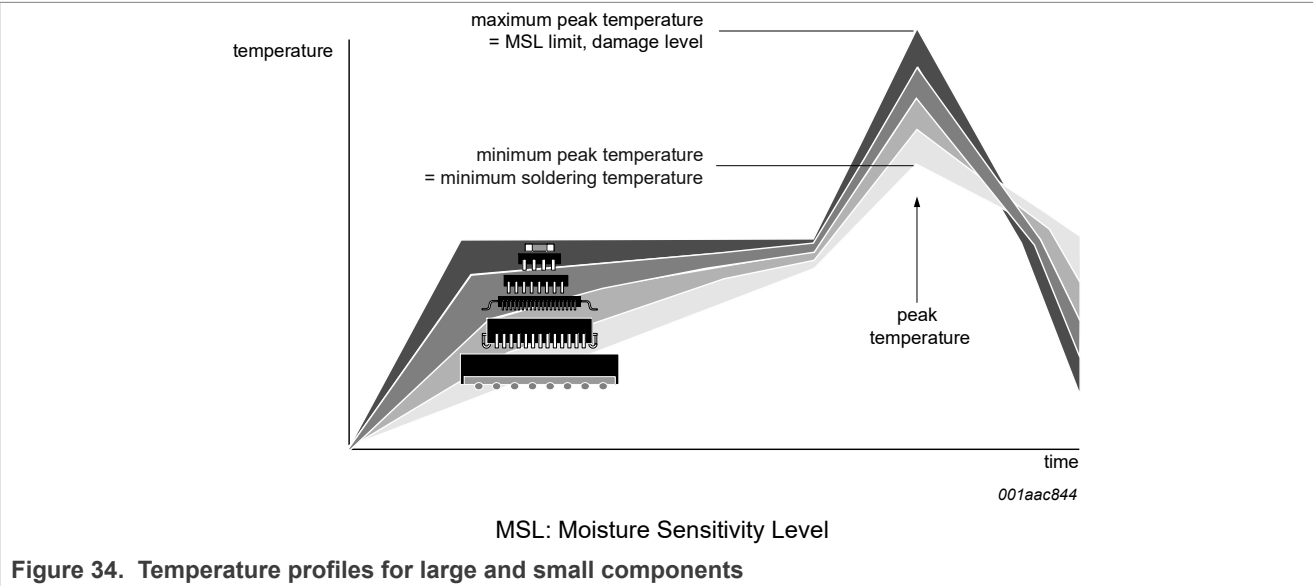


Figure 34. Temperature profiles for large and small components

For further information on temperature profiles, refer to Application Note *AN10365 “Surface mount reflow soldering description”*.

17 Acronyms

[Table 72](#) describes the acronyms used in this data sheet.

Table 72. Acronyms

Acronym	Description
ESD	Electrostatic discharge
FET	Field-effect transistor
GPIO	General purpose input/output
I/O	Input/output
LED	Light-emitting diode
LSB	Least significant bit
CITO	Controller in, target out
COTI	Controller out, target in
MSB	Most significant bit
POR	Power-on reset
PRR	Pulse repetition rate
SPI	Serial peripheral interface

18 Revision history

[Table 73](#) summarizes revisions to this document.

Table 73. Revision history

Document ID	Release date	Description
PCAL9722 v.1.2	3 July 2025	<ul style="list-style-type: none">Updated per CIN# 202504004I<ul style="list-style-type: none">Table 63: Replaced Max Value column name with Value (Typ). Updated this value from 34.6 to 39
PCAL9722 v.1.1	1 May 2023	<ul style="list-style-type: none">Table 2: Updated orderable part number and packing method information
PCAL9722 v.1.0	8 December 2022	<ul style="list-style-type: none">Product data sheet

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Legal information

Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <https://www.nxp.com>.

Definitions

Draft — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Suitability for use in non-automotive qualified products — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

HTML publications — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately. Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at PSIRT@nxp.com) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. — NXP B.V. is not an operating company and it does not distribute or sell products.

Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

NXP — wordmark and logo are trademarks of NXP B.V.

Tables

Tab. 1.	Ordering information	4	Tab. 38.	Interrupt status port 1 register (address 59h) bit description	18
Tab. 2.	Ordering options	4	Tab. 39.	Interrupt status port 2 register (address 5Ah) bit description	18
Tab. 3.	Pin description	6	Tab. 40.	Output port configuration register (address 5Ch)	18
Tab. 4.	PCAL9722 address map	8	Tab. 41.	Interrupt edge port 0A register (address 60h)	19
Tab. 5.	Interface definition	8	Tab. 42.	Interrupt edge port 0B register (address 61h)	19
Tab. 6.	Command byte	9	Tab. 43.	Interrupt edge port 1A register (address 62h)	19
Tab. 7.	Input port 0 register (address 00h)	12	Tab. 44.	Interrupt edge port 1B register (address 63h)	19
Tab. 8.	Input port 1 register (address 01h)	12	Tab. 45.	Interrupt edge port 2A register (address 64h)	19
Tab. 9.	Input port 2 register (address 02h)	12	Tab. 46.	Interrupt edge port 2B register (address 65h)	20
Tab. 10.	Output port 0 register (address 04h)	12	Tab. 47.	Interrupt edge bits (IEx.x)	20
Tab. 11.	Output port 1 register (address 05h)	12	Tab. 48.	Interrupt clear port 0 register (address 68h) bit description	20
Tab. 12.	Output port 2 register (address 06h)	13	Tab. 49.	Interrupt clear port 1 register (address 69h) bit description	20
Tab. 13.	Polarity inversion port 0 register (address 08h)	13	Tab. 50.	Interrupt clear port 2 register (address 6Ah) bit description	20
Tab. 14.	Polarity inversion port 1 register (address 09h)	13	Tab. 51.	Input status port 0 register (address 6Ch) bit description	21
Tab. 15.	Polarity inversion port 2 register (address 0Ah)	13	Tab. 52.	Input status port 1 register (address 6Dh) bit description	21
Tab. 16.	Configuration port 0 register (address 0Ch)	13	Tab. 53.	Input status port 2 register (address 6Eh) bit description	21
Tab. 17.	Configuration port 1 register (address 0Dh)	13	Tab. 54.	Individual pin output configuration register 0 (address 70h) bit description	21
Tab. 18.	Configuration port 2 register (address 0Eh)	14	Tab. 55.	Individual pin output configuration register 1 (address 71h) bit description	21
Tab. 19.	Current control port 0A register (address 40h)	14	Tab. 56.	Individual pin output configuration register 2 (address 72h) bit description	22
Tab. 20.	Current control port 0B register (address 41h)	14	Tab. 57.	Switch debounce enable port 0 register (address 74h) bit description	22
Tab. 21.	Current control port 1A register (address 42h)	14	Tab. 58.	Switch debounce enable port 1 register (address 75h) bit description	22
Tab. 22.	Current control port 1B register (address 43h)	14	Tab. 59.	Switch debounce count register (address 76h) bit description	22
Tab. 23.	Current control port 2A register (address 44h)	15	Tab. 60.	Recommended supply sequencing and ramp rates	32
Tab. 24.	Current control port 2B register (address 45h)	15	Tab. 61.	Limiting values	34
Tab. 25.	Input latch port 0 register (address 48h)	15	Tab. 62.	Operating conditions	35
Tab. 26.	Input latch port 1 register (address 49h)	15	Tab. 63.	Thermal characteristics	36
Tab. 27.	Input latch port 2 register (address 4Ah)	16	Tab. 64.	Static characteristics for PCAL9722HN	37
Tab. 28.	Pull-up/pull-down enable port 0 register (address 4Ch)	16	Tab. 65.	Static characteristics for PCAL9722HN/Q900	39
Tab. 29.	Pull-up/pull-down enable port 1 register (address 4Dh)	16	Tab. 66.	SPI bus interface timing requirements	46
Tab. 30.	Pull-up/pull-down enable port 2 register (address 4Eh)	16	Tab. 67.	Reset timing requirements	46
Tab. 31.	Pull-up/pull-down selection port 0 register (address 50h)	17	Tab. 68.	Switching characteristics	47
Tab. 32.	Pull-up/pull-down selection port 1 register (address 51h)	17	Tab. 69.	Package summary	51
Tab. 33.	Pull-up/pull-down selection port 2 register (address 52h)	17	Tab. 70.	SnPb eutectic process (from J-STD-020D)	55
Tab. 34.	Interrupt mask port 0 register (address 54h) bit description	17			
Tab. 35.	Interrupt mask port 1 register (address 55h) bit description	17			
Tab. 36.	Interrupt mask port 2 register (address 56h) bit description	17			
Tab. 37.	Interrupt status port 0 register (address 58h) bit description	18			

Ultra Low-Voltage Translating 22-bit SPI I/O Expander with Agile I/O Features, Interrupt Output, and Reset

Tab. 71.	Lead-free process (from J-STD-020D)	55	Tab. 73.	Revision history	57
Tab. 72.	Acronyms	56			

Figures

Fig. 1.	Block diagram of PCAL9722 (positive logic)	5	Fig. 21.	Standby supply current versus ambient temperature	42
Fig. 2.	Pin configuration for HVQFN32	6	Fig. 22.	Supply current versus supply voltage	42
Fig. 3.	PCAL9722 address	8	Fig. 23.	Supply current versus number of I/O held LOW	43
Fig. 4.	Pointer register bits	9	Fig. 24.	I/O sink current vs LOW-level output voltage	43
Fig. 5.	Simplified schematic of P0_0 to P2_5	23	Fig. 25.	I/O source current vs HIGH-level output voltage	44
Fig. 6.	Switch contact bounce	25	Fig. 26.	LOW-level output voltage vs temperature	44
Fig. 7.	Debouncer block diagram	25	Fig. 27.	I/O high voltage vs temperature	45
Fig. 8.	Switch debounce timing	26	Fig. 28.	Definition of timing	46
Fig. 9.	SPI data format	27	Fig. 29.	Interrupt load circuit and voltage waveforms	48
Fig. 10.	Write access	28	Fig. 30.	P port load circuit and voltage waveforms	49
Fig. 11.	Write with auto increment	28	Fig. 31.	Reset load circuits and voltage waveforms	50
Fig. 12.	Read access	29	Fig. 32.	Package outline SOT617-3 (HVQFN32)	52
Fig. 13.	System level configuration	29	Fig. 33.	Reflow soldering footprint for HVQFN32 (SOT617-3)	53
Fig. 14.	Typical application	30	Fig. 34.	Temperature profiles for large and small components	55
Fig. 15.	Simplified output stage	31			
Fig. 16.	VDD(P) is lowered below 0.2 V or to 0 V and then ramped up to VDD(P)	31			
Fig. 17.	VDD(P) is lowered below the POR threshold, then ramped back up to VDD(P)	32			
Fig. 18.	Glitch width and glitch height	32			
Fig. 19.	Power-on reset voltage (VPOR)	33			
Fig. 20.	Supply current versus ambient temperature	42			

Contents

1	General description	2	8.1	Output drive strength control	30
2	Features and benefits	3	8.2	Power-on reset requirements	31
2.1	Agile I/O features	3	8.3	Device current consumption with internal	
2.2	Additional Agile I/O Plus features	3		pull-up and pull-down resistors	33
3	Ordering information	4	9	Limiting values	34
3.1	Ordering options	4	10	Recommended operating conditions	35
4	Block diagram	5	11	Thermal characteristics	36
5	Pinning information	6	12	Static characteristics	37
5.1	Pinning	6	12.1	Typical characteristics	42
5.2	Pin description	6	13	Dynamic characteristics	46
6	Functional description	8	14	Parameter measurement information	48
6.1	Device address	8	15	Package information	51
6.2	Interface definition	8	15.1	Package summary	51
6.3	Pointer register and command byte	8	15.2	Package outline	51
6.4	Register descriptions	11	15.3	Soldering	53
6.4.1	Input port registers (00h, 01h, 02h)	12	16	Soldering of SMD packages	54
6.4.2	Output port registers (04h, 05h, 06h)	12	16.1	Introduction to soldering	
6.4.3	Polarity inversion registers (08h, 09h, 0Ah)	13	16.2	Wave and reflow soldering	
6.4.4	Configuration registers (0Ch, 0Dh, 0Eh)	13	16.3	Wave soldering	
6.4.5	Output drive strength registers (40h, 41h, 42h, 43h, 44h, 45h)	14	16.4	Reflow soldering	
6.4.6	Input latch registers (48h, 49h, 4Ah)	15	17	Acronyms	56
6.4.7	Pull-up/pull-down enable registers (4Ch, 4Dh, 4Eh)	16	18	Revision history	57
6.4.8	Pull-up/pull-down selection registers (50h, 51h, 52h)	16		Legal information	58
6.4.9	Interrupt mask registers (54h, 55h, 56h)	17			
6.4.10	Interrupt status registers (58h, 59h, 5Ah)	18			
6.4.11	Output port configuration register (5Ch)	18			
6.4.12	Interrupt edge registers (60h, 61h, 62h and 63h, 64h, 65h)	19			
6.4.13	Interrupt clear registers (68h, 69h, 6Ah)	20			
6.4.14	Input status registers (6Ch, 6Dh, 6Eh)	20			
6.4.15	Individual pin output configuration registers (70h, 71h, 72h)	21			
6.4.16	Switch debounce enable registers (74h, 75h)	22			
6.4.17	Switch debounce count register (76h)	22			
6.5	I/O port	22			
6.6	Power-on reset	23			
6.7	Reset input (RESET)	23			
6.8	Interrupt output (INT)	23			
6.9	Switch debounce circuitry	24			
7	Characteristics of the 4-wire SPI serial-bus interface	27			
7.1	SPI-compatible 4-wire serial interface signals	27			
7.2	Data format	27			
7.3	Write access sequence	27			
7.4	Auto increment	28			
7.5	Read Access Sequence	29			
7.6	System configuration	29			
8	Application design-in information	30			

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.