

56F8167

Target Applications


- > Polyphase metering
- > UPS
- > Electric vehicles
- > Currency validation
- > Industrial control/ connectivity
- > Home appliances
- > Smart relays
- > Fire and security systems
- > Medical monitoring

Overview

Ever wish you had just a handful of extra input/output pins available? Your wish has just come true! If your application requires a few more pins than those available in the 56F8166, the 56F8167 is the device for you.

With its 544 KB of on-chip Flash memory, the 56F8167 has the same memory footprint as the 56F8166, yet provides an additional 14 digital input/output pins with its 160-pin LQFP package. You will continue to enjoy use of pulse-width modulation (PWM) outputs, analog-to-digital converter (ADC) inputs and timer channels, along with the ability to interface with other devices in your system via the external memory interface.

When you need the right mix of functionality without adding memory, the 56F8165, 56F8166 and 56F8167 devices offer you both flexibility and compatibility, making your choice a simple one.

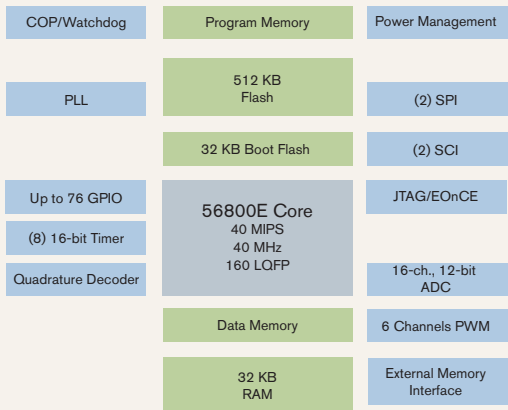

56800E Core Features

- > Up to 40 MIPS at a guaranteed 40 MHz core frequency
- > DSP and microcontroller (MCU) functionality in a unified, C-efficient architecture
- > JTAG/enhanced on-chip emulation (EOnCE™) for unobtrusive, real-time debugging
- > Four 36-bit accumulators
- > 16- and 32-bit bidirectional barrel shifter
- > Parallel instruction set with unique addressing modes
- > Hardware DO and REP loops available
- > Three internal address buses
- > Four internal data buses
- > Architectural support for 8-, 16- and 32-bit single-cycle data fetches
- > MCU-style software stack support
- > Controller-style addressing modes and instructions
- > Single-cycle 16 x 16-bit parallel multiplier-accumulator (MAC)
- > Proven to deliver more control functionality with a smaller memory footprint than competing architectures

Benefits

- > Hybrid architecture facilitates implementation of both control and signal processing functions in a single device
- > High-performance, secured Flash memory eliminates the need for external storage devices
- > Extended temperature range up to +105°C allows for operation of nonvolatile memory in industrial applications
- > Flash memory emulation of EEPROM eliminates the need for external nonvolatile memory
- > 32-bit performance with 16-bit code density
- > On-chip voltage regulator and power management reduce overall system cost
- > Off-chip memory expansion capabilities allow for glueless interfacing with the additional memory of external devices without sacrificing performance
- > This device boots directly from Flash, providing additional application flexibility
- > High-performance PWM with programmable fault capability simplifies design and promotes compliance with safety regulations
- > PWM and ADC modules are tightly coupled to reduce processing overhead
- > Low-voltage interrupts (LVIs) protect the system from brownout or power failure
- > General-purpose input/output (GPIO) pins support application-specific needs
- > Simple in-application Flash memory programming via EOnCE or serial communication

Memory Features

- > Architecture permits as many as three simultaneous accesses to program and data memory
- > On-chip memory includes high-speed volatile and nonvolatile components
 - 512 KB of Program Flash
 - 32 KB of Data RAM
 - 32 KB of Boot Flash
- > All memories operate at 40 MHz (zero wait states) over temperature range (-40°C to +105°C), with no software tricks or hardware accelerators required
- > Flash security feature prevents unauthorized accesses to its content
- > Off-chip memory expansion capabilities provide a simple method for interfacing additional external memory and/or peripheral devices
 - Access up to 4 MB of external program memory or 32 MB of external data memory
 - External accesses supported at up to 40 MHz (zero wait states)

56F8167 Peripheral Circuit Features

- > PWM module with six outputs and four programmable fault inputs
- > Two serial peripheral interfaces (SPIs)
- > Two serial communications interfaces (SCIs)
- > Eight 16-bit timers with input and output compare capability
- > Four-input quadrature decoder
- > On-chip 3.3V to 2.6V voltage regulator
- > Software-programmable Phase-Lock Loop (PLL)
- > 12-bit ADCs with 16 inputs, self-calibration and current injection capability
- > Up to 76 general-purpose input/output (GPIO) pins
- > External reset input pin for hardware reset
- > Computer operating properly (COP)
- > Integrated power-on reset and LVI module
- > I²C communications master mode (emulated)

Product Documentation

- 56F8300 Peripherals Manual** Detailed peripheral description of the 56F8300 family of devices
Order Number: MC56F8300UM
- 56F8367/56F8167 Technical Data Sheet** Electrical and timing specifications, device-specific peripheral information and package and pin descriptions
Order Number: MC56F8367
- 56F8167 Product Brief** Summary description and block diagram of the core, memory, peripherals and interfaces
Order Number: MC56F8167PB
- DSP56800E Reference Manual** Detailed description of the DSP56800E architecture, 16-bit core processor and the instruction set
Order Number: DSP56800ERM

Award-Winning Development Environment

- > Processor Expert™ (PE) technology provides a rapid application design (RAD) tool that combines easy-to-use, component-based software application creation with an expert knowledge system.
- > The CodeWarrior™ Integrated Development Environment (IDE) is a sophisticated tool for code navigation, compiling and debugging. A complete set of evaluation modules (EVMs) and development system cards will support concurrent engineering. Together, PE technology, CodeWarrior tools and EVMs create a complete, scalable tools solution for easy, fast and efficient development.

Ordering Information

Part	MC56F8167
Package Type	Low-Profile Quad Flat Pack (LQFP)
Pin Count	160
Temperature Range	-40°C to +105°C
Order Number	MC56F8167VPY

Learn More: For more information about Freescale products, please visit www.freescale.com.