


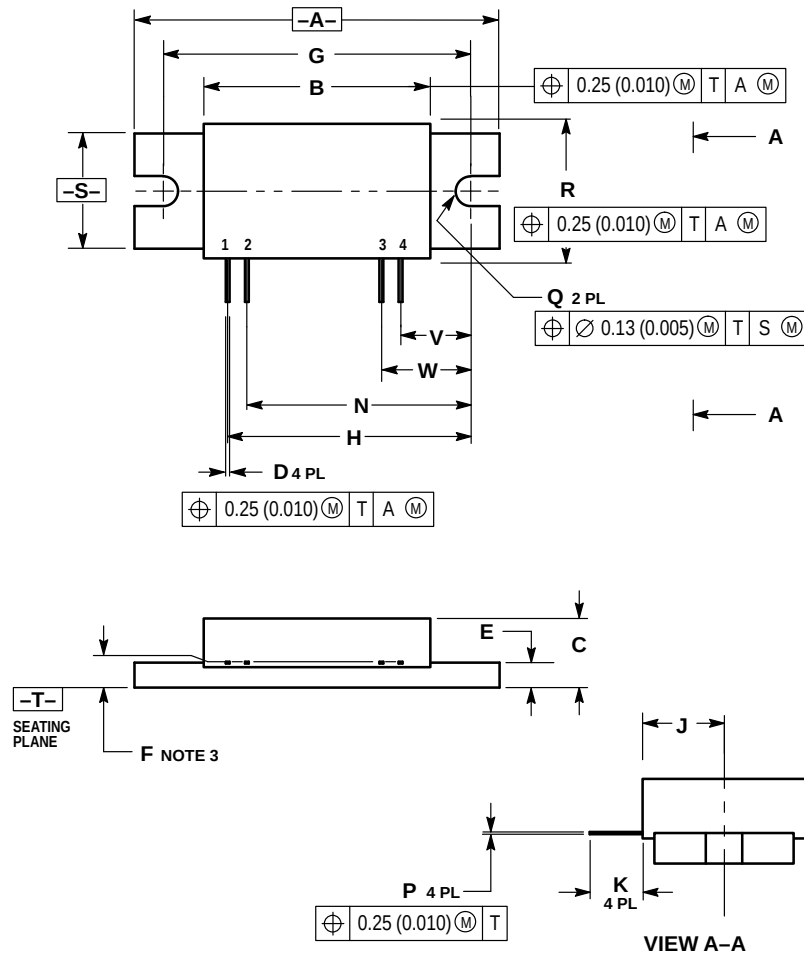

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION F IS FROM THE BOTTOM OF HEATSINK TO THE TOP OF THE LEAD.
 4. DIMENSION P TO BE MEASURED AS LEAD EXITS COVER.
 5. FLANGE FLATNESS 0.038 (0.0015) MAXIMUM CONVEX, 0.063 (0.0025) MAXIMUM CONCAVE.
 6. ADHESIVE MATERIAL SHALL BE INCLUDED IN THE DIMENSIONS LISTED.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.890	1.910	48.01	48.51
B	1.170	1.190	29.72	30.22
C	0.350	0.376	8.89	9.55
D	0.018	0.022	0.46	0.55
E	0.115	0.135	2.92	3.42
F	0.170 BSC		4.31 BSC	
G	1.600 BSC		40.64 BSC	
H	1.265 BSC		32.13 BSC	
J	0.325	0.375	8.25	9.52
K	0.225	—	5.72	—
N	1.165 BSC		29.59 BSC	
P	0.010 REF		0.25 REF	
Q	0.150	0.160	3.81	4.06
R	0.685	0.705	17.40	17.90
S	0.598	0.612	15.18	15.54
V	0.365 BSC		9.27 BSC	
W	0.465 BSC		11.81 BSC	

- STYLE 1:
1. RF IN
 2. V BIAS
 3. V SUPPLY
 4. RF OUT

CASE 301AW-02
ISSUE B

DATE 12/11/98