


$\phi$  0.25<0.010> (M) T A (M) B (M)



$\phi$  0.38<0.015> (M) T A (M) B (M)

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	<b>MECHANICAL OUTLINE</b>	PRINT VERSION NOT TO SCALE	
TITLE:  LINEAR HYBRID CATV	DOCUMENT NO: 98ASB13369C		REV: B
	CASE NUMBER: 448-03		25 APR 2005
	STANDARD: NON-JEDEC		

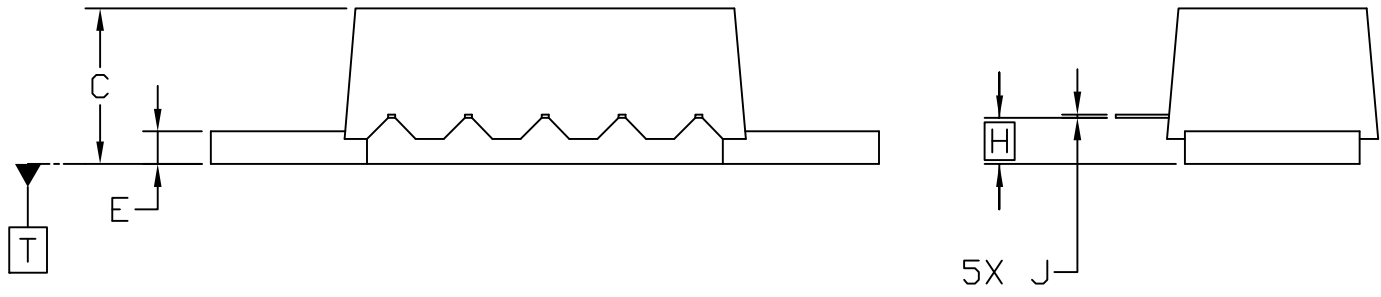

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH
4. 448-01 & -02 OBSOLETE, NEW STANDARD 448-03.

STYLE 1:

- PIN 1: RF INPUT
- PIN 2: GROUND
- PIN 3: RESISTOR-GROUND
- PIN 4: Vcc
- PIN 5: RF OUTPUT

STYLE 2:

- PIN 1: RF INPUT
- PIN 2: GROUND
- PIN 3: Vcc1
- PIN 4: Vcc2
- PIN 5: RF OUTPUT

DIM	INCH		MILLIMETER		DIM	INCH		MILLIMETER	
	MIN	MAX	MIN	MAX		MIN	MAX	MIN	MAX
A	1.740	1.760	44.20	44.70					
B	0.550	0.570	13.97	14.49					
C	0.405	0.445	10.29	11.30					
D	0.018	0.022	0.46	0.55					
E	0.085	0.095	2.16	2.41					
G	0.200 BSC		5.08 BSC						
H	0.120 BSC		3.05 BSC						
J	0.009	0.011	0.23	0.28					
K	0.180	0.220	4.57	5.59					
N	1.045	1.075	26.54	27.30					
Q	0.145	0.155	3.68	3.94					
R	0.455	0.465	11.56	11.81					
U	1.490	1.510	37.85	38.35					

© FREESCALE SEMICONDUCTOR, INC.  
ALL RIGHTS RESERVED.

MECHANICAL OUTLINE

PRINT VERSION NOT TO SCALE

TITLE:

LINEAR HYBRID CATV

DOCUMENT NO: 98ASB13369C

REV: B

CASE NUMBER: 448-03

25 APR 2005

STANDARD: NON-JEDEC